
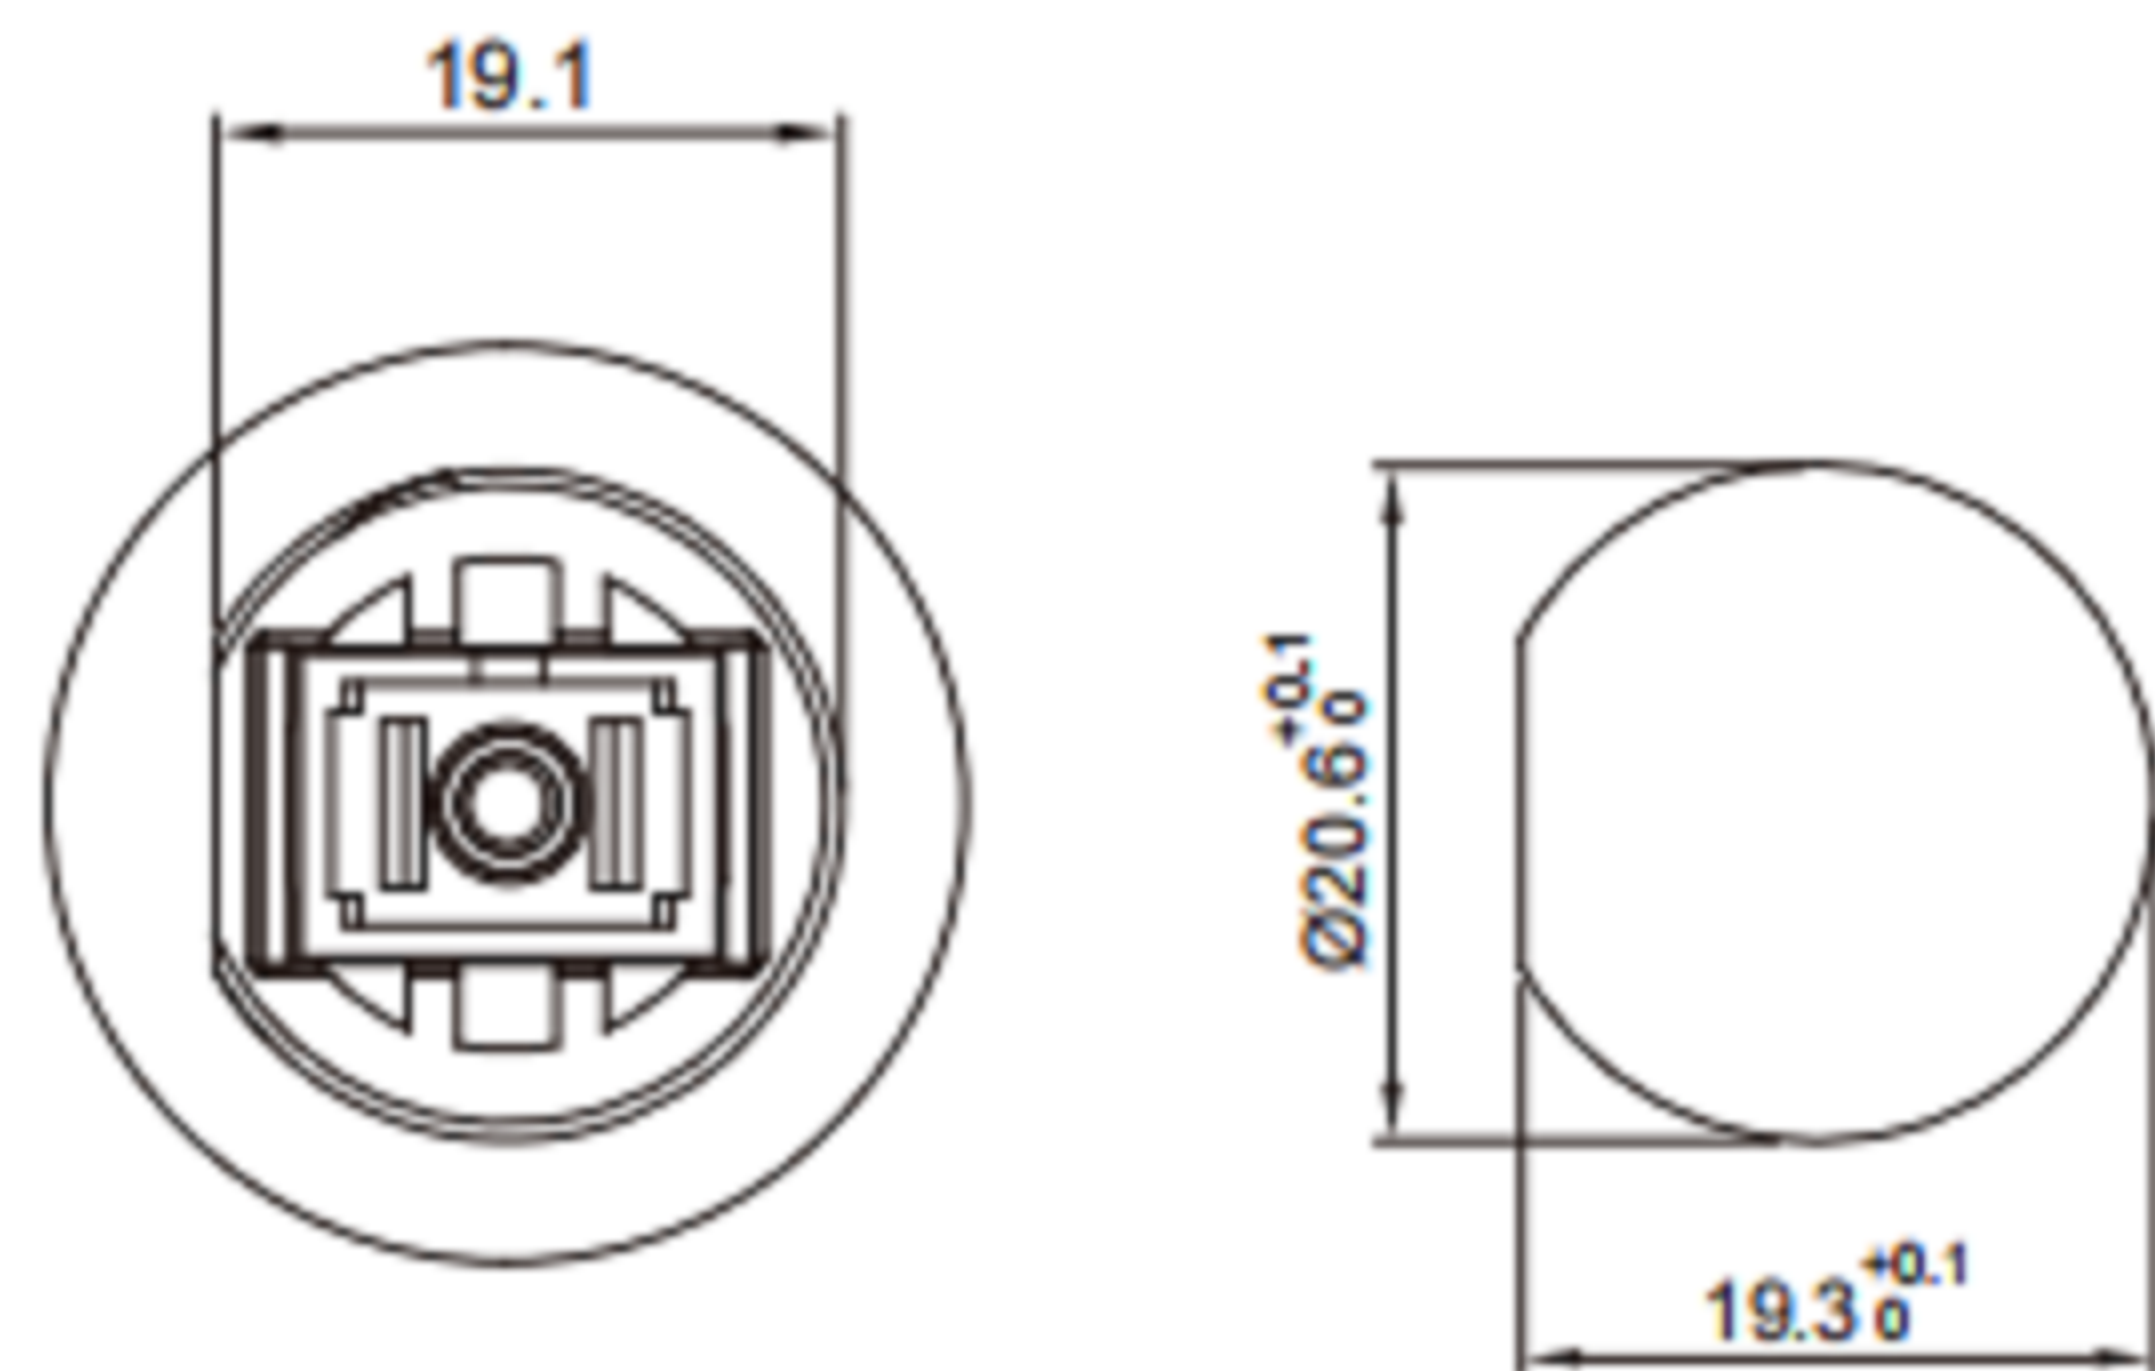


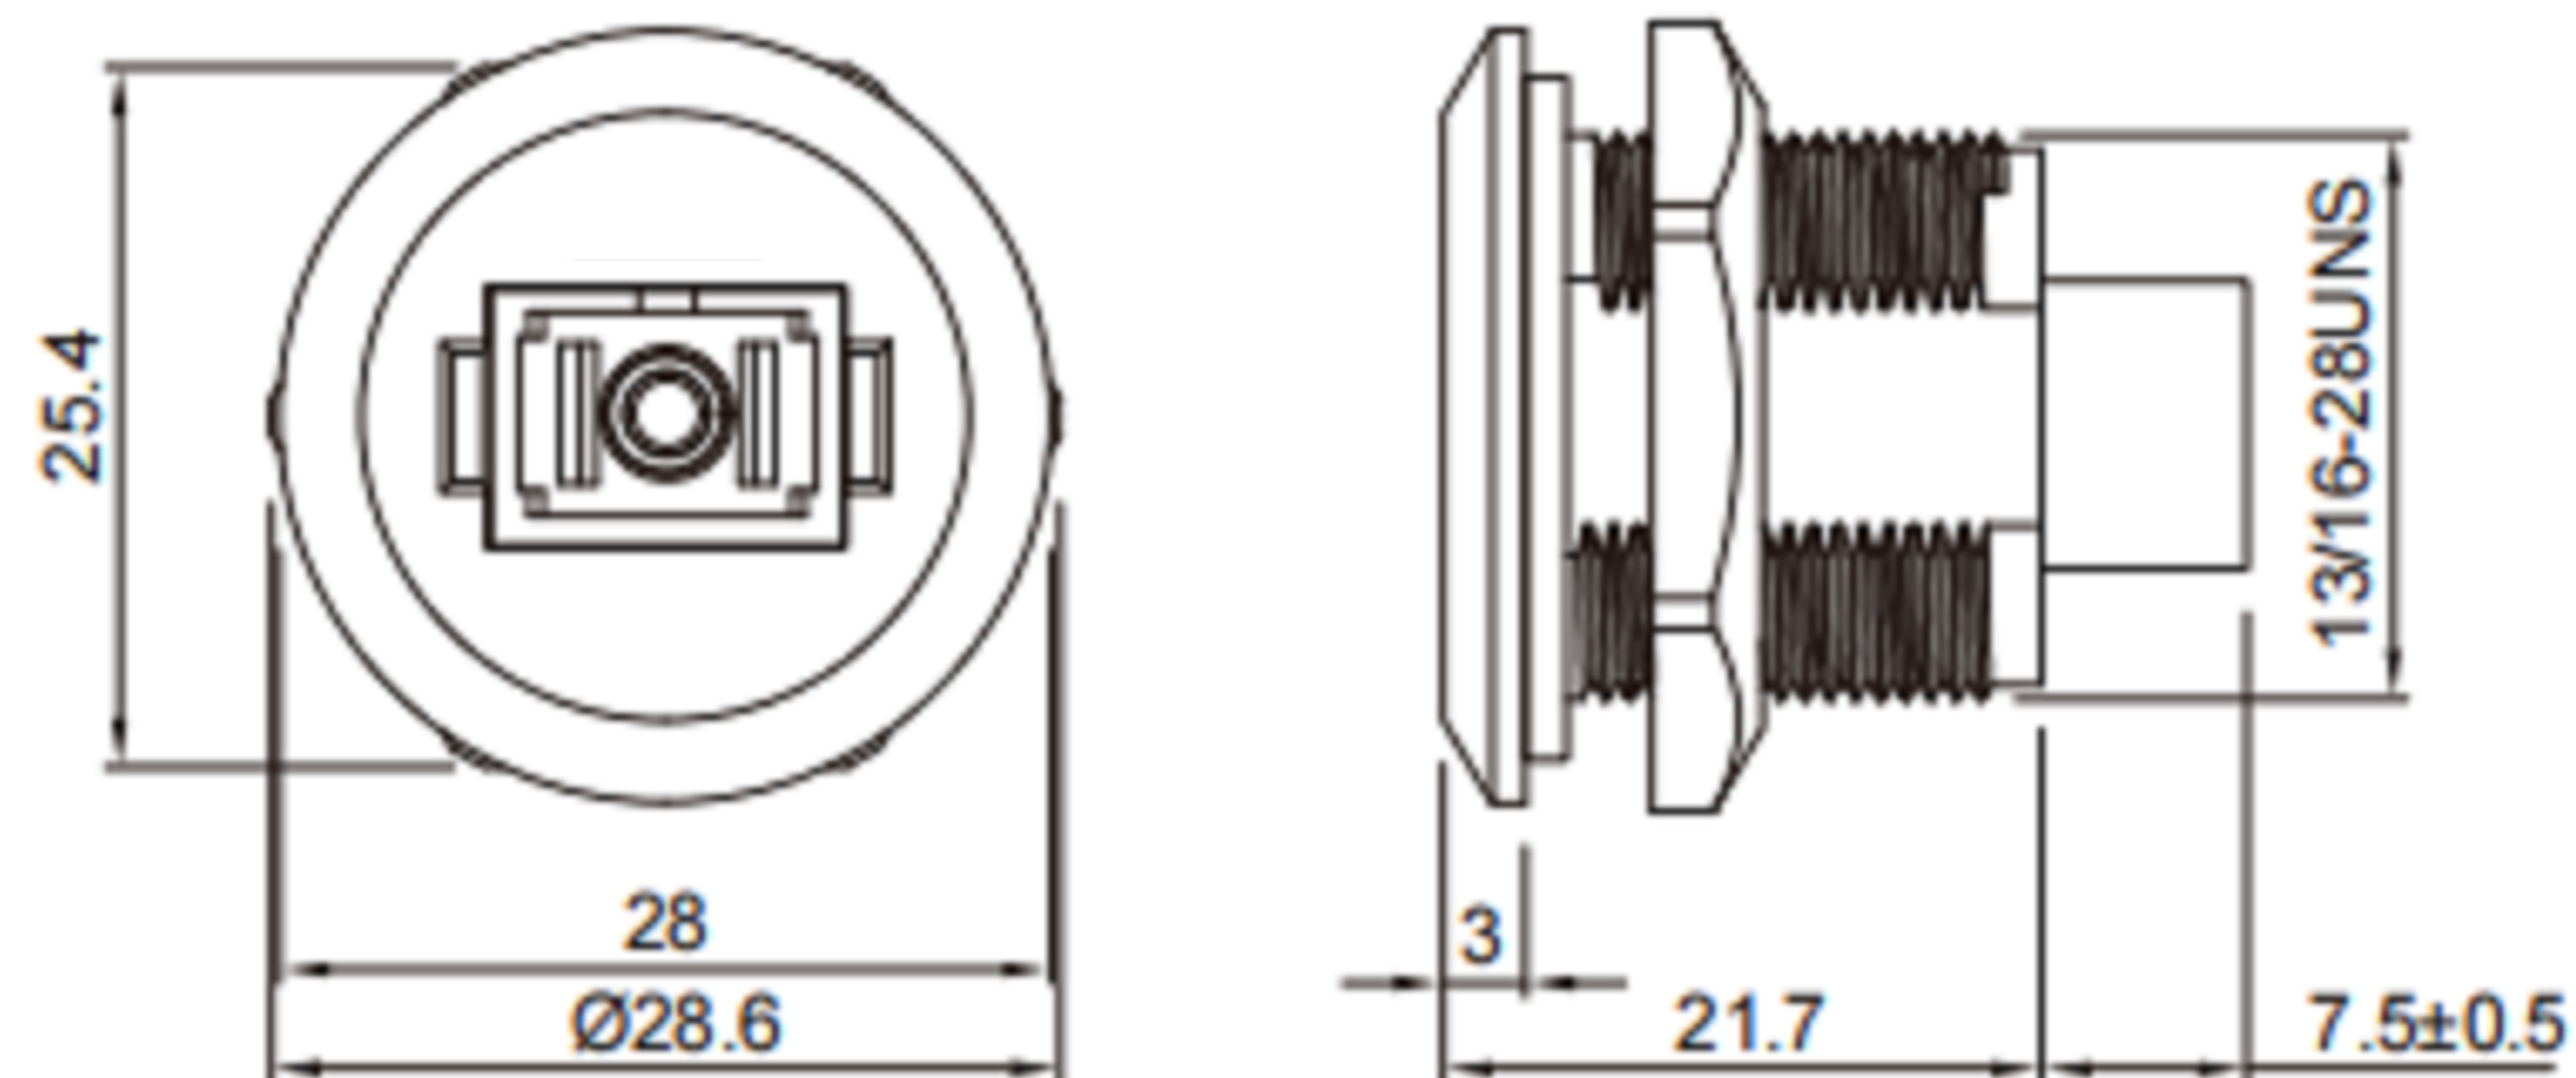

产品开孔尺寸
hole opening size

EP-FDDI单模单芯板前安装插座(螺纹式)

EP-FDDI Single-mode Single-core Front Mount Receptacle(Threaded)

EP - F F1 - PRB

产品参数 PRODUCT PARAMETERS

壳体材料 Shell material	热塑性塑料PA66 阻燃等级: V-0 Thermoplastic plastic PA66, flame retardant grade: V-0	额定电压 Rated voltage	5~20V
导体材料 Conductor material	黄铜 Brass	额定电流 Rated current	1~3A
线缆材料 Cable material	PVC外被 PVC jacket	绝缘电阻 Insulation impedance	2000 mΩ
连接方式 Coupling	螺纹锁紧(T) Thread (T)	适用温度 Applicable temperature	-40°C ~ +105°C
防水等级 Waterproof grade	IP67, IP68	插拔次数 Durability	≥500次(Cycle)

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS
MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	12/13/19	FINISH		MODLE	EP - F F1 - PRB
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SIZE
Jacky Chen	12/13/19	SHEET NO.	1 of 1	PART NO.	A4
APPROVED BY:	DATE				VER
Tony Kao	12/13/19				R1