


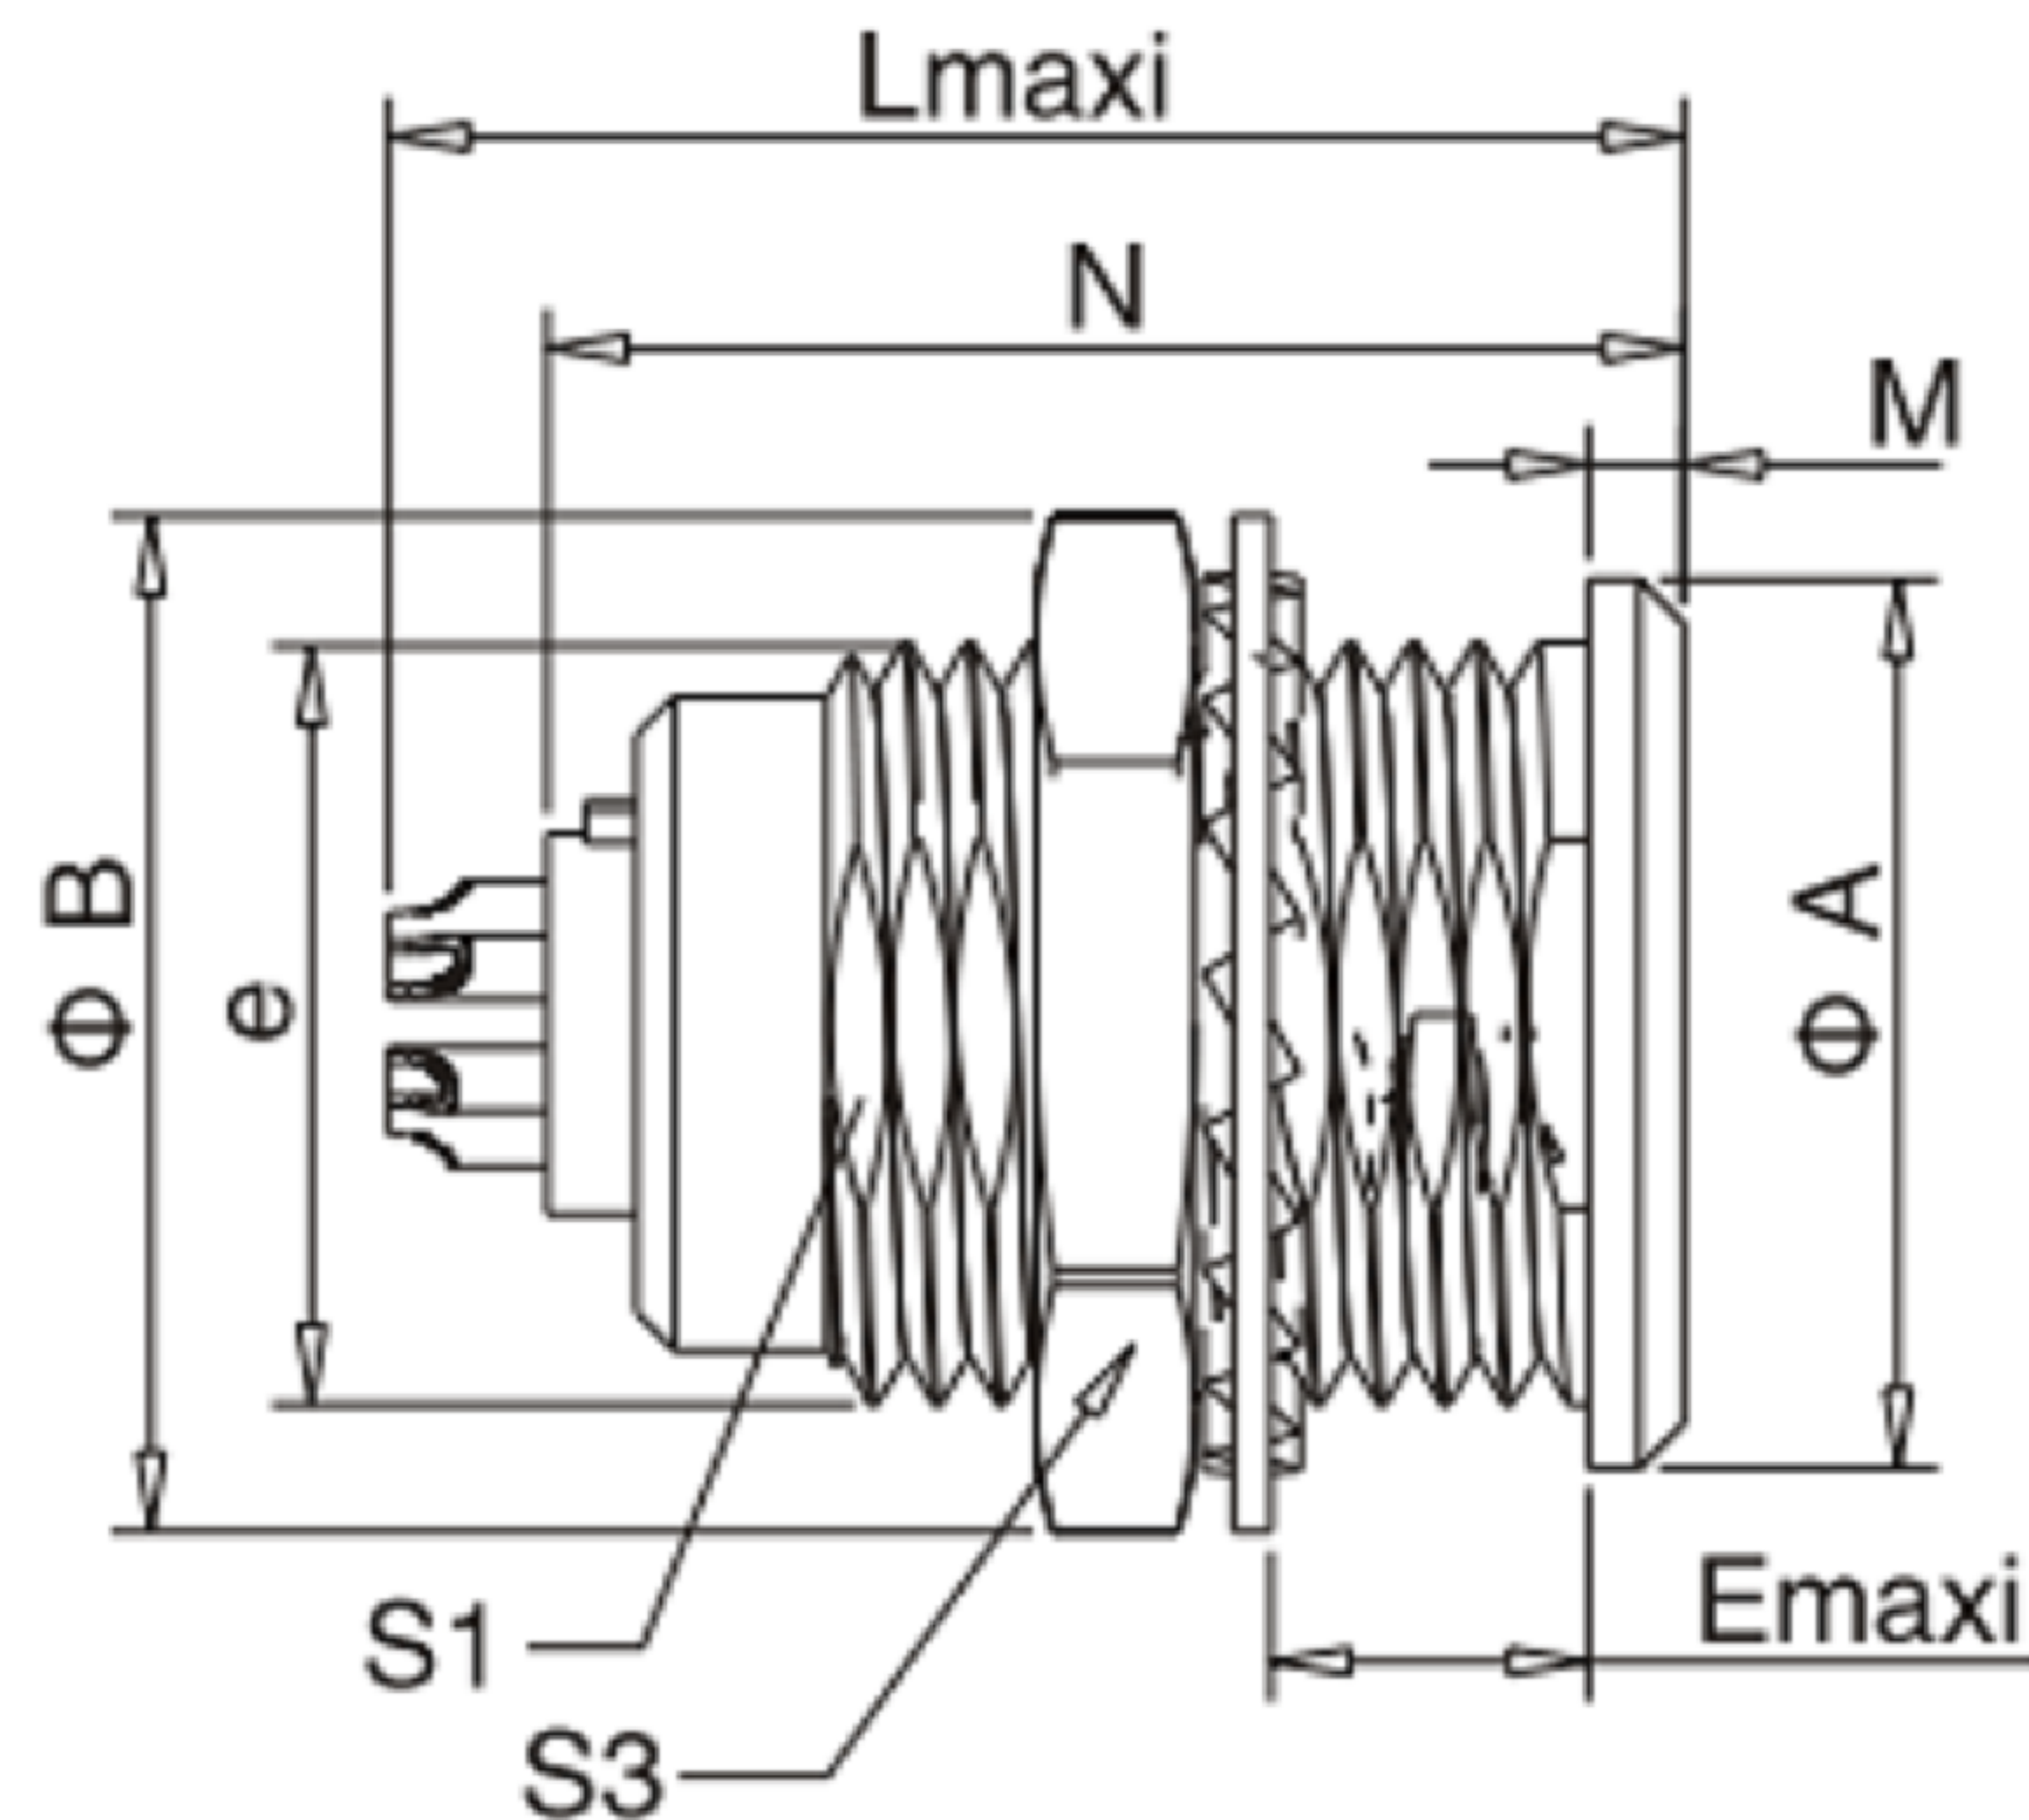

项目		尺寸							
系列	型号	A	B	e	E	L	M	S1	S3
00	ZRA	8	10.2	M7x0.5	5.5	14.5	1.0	6.3	9
0S	ZRA	10	12.3	M9x0.6	7.0	21.3	1.2	8.2	11
1S	ZRA	14	16.0	M12x1.0	7.5	23.2	1.5	10.5	14
2S	ZRA	18	19.2	M15x1.0	8.0	24.8	2.0	13.5	17

S系列金属连接器技术特性

机械寿命：>5000次

最大潮湿：在60°C时最高达到95%

屏蔽性能：75dB(10MHz) 40dB(1GHz)

抗振动性能：15g[10Hz~2000Hz]

盐雾试验：96hr

抗冲击性能：100g,6ms

防护等级：IP50


工作温度：-55°C~+125°C

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/13/19

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

12/13/19

FINISH

MODLE

ZRA

APPROVED BY:

Tony Kao

DATE

12/13/19

SCALE

1 : 1

DWG NO.

SIZE

A4

PART NO.

VER

R1

ITEM NO. DESCRIPTION DRAWN DATE