



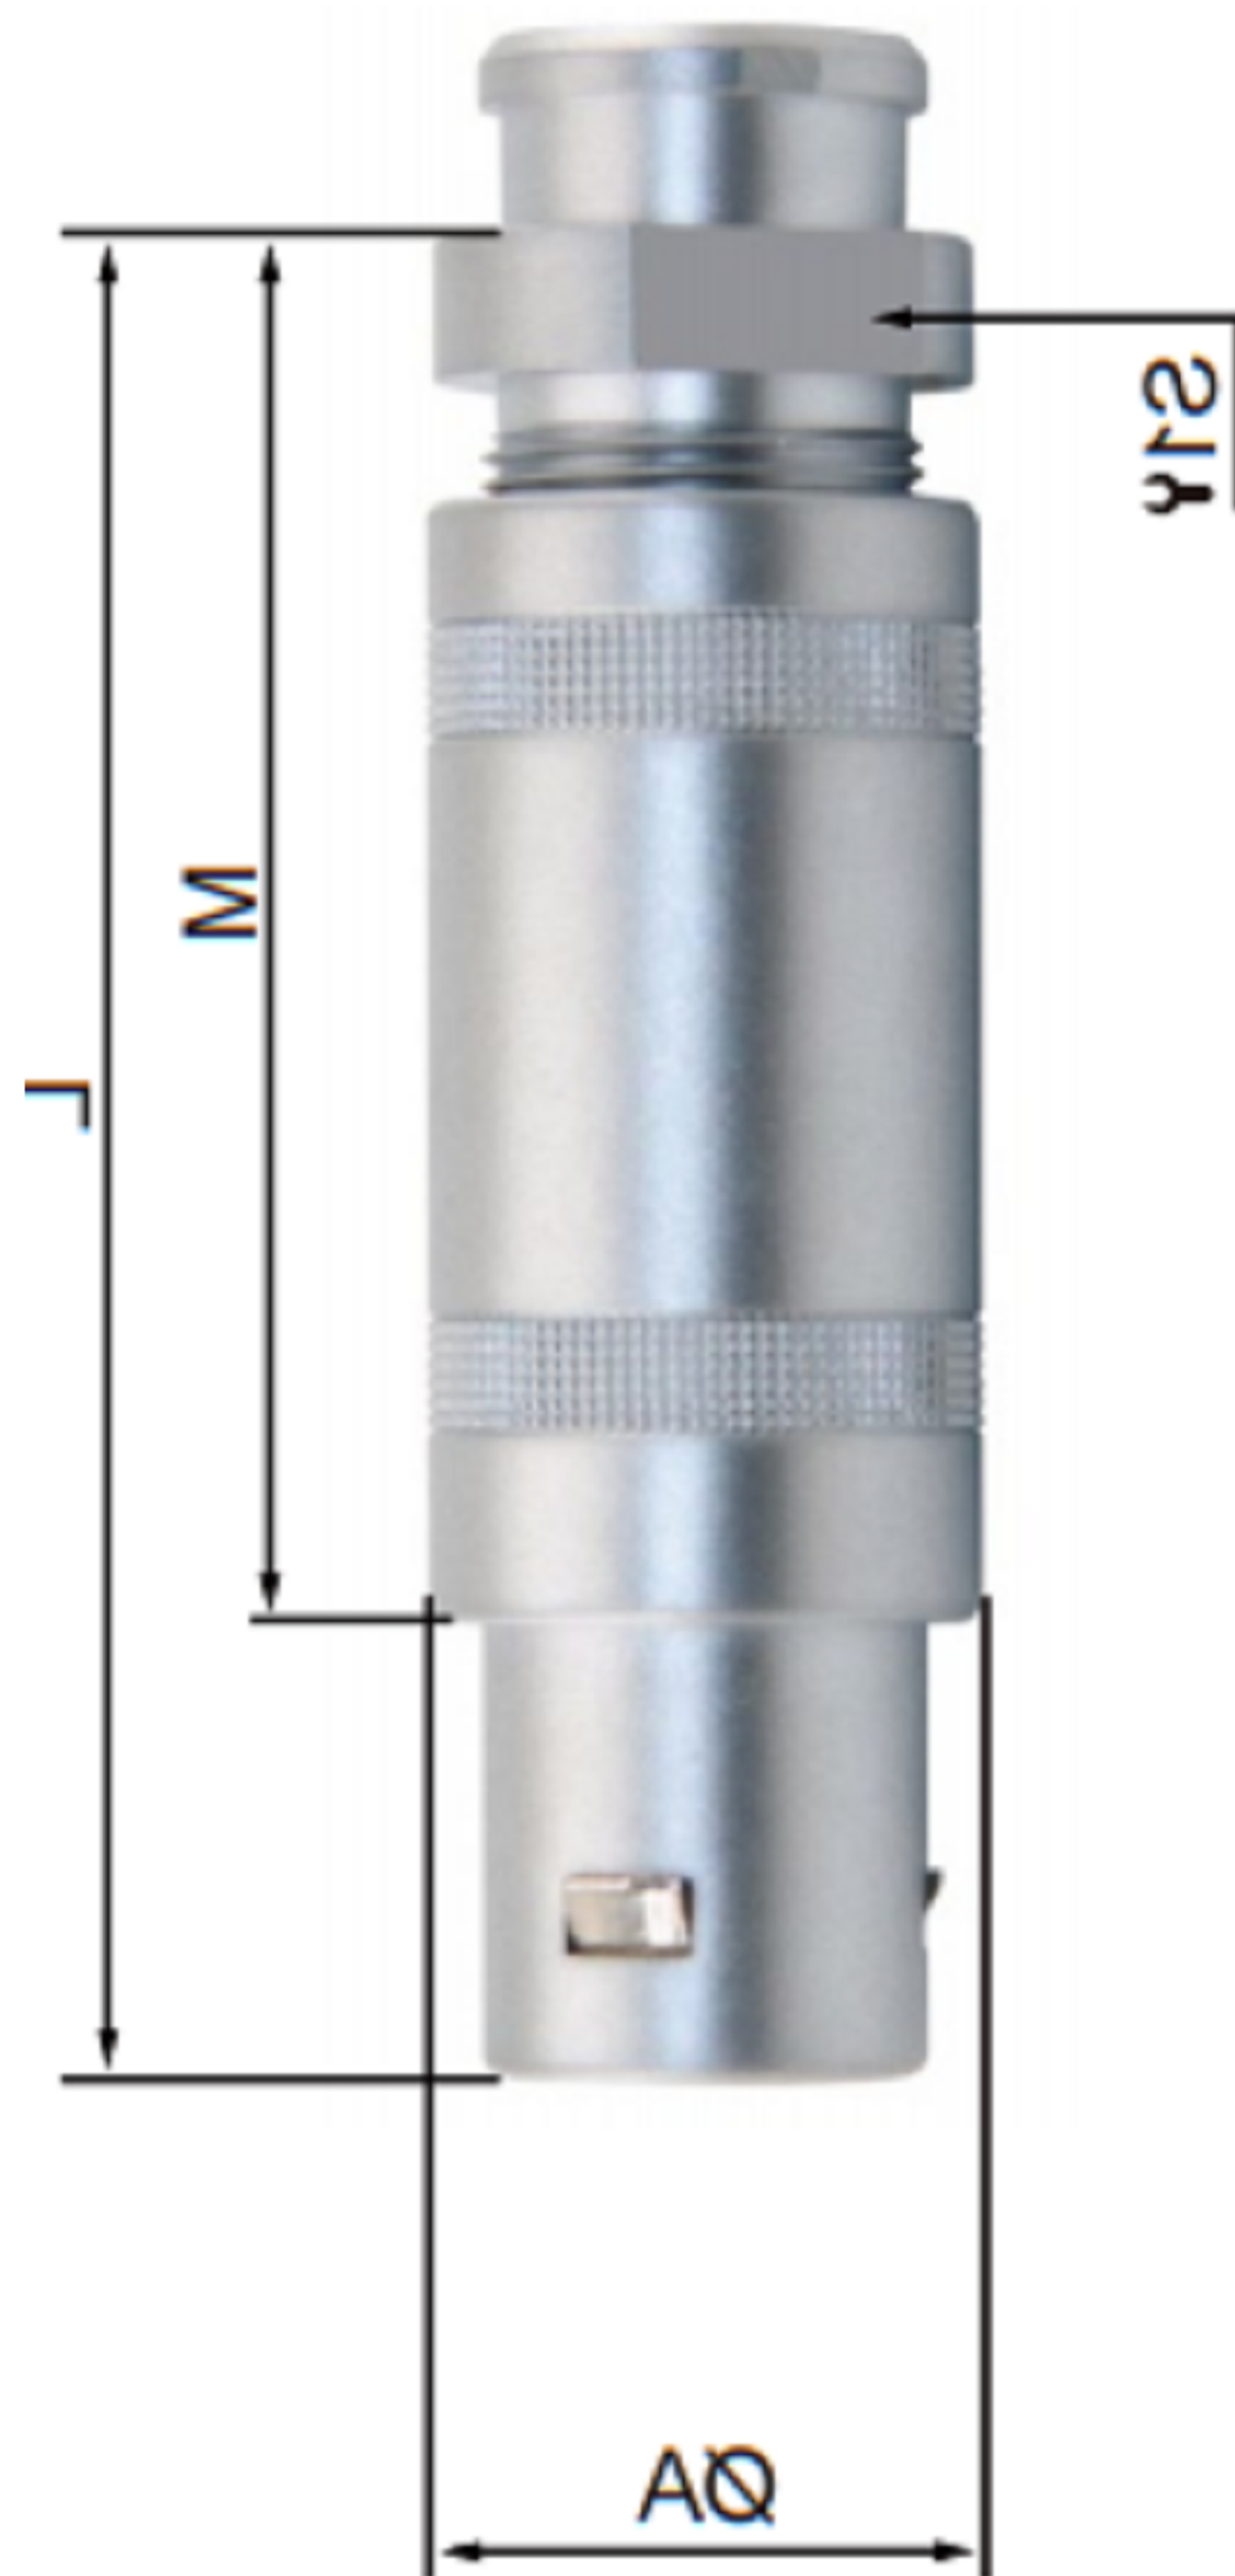

IP50

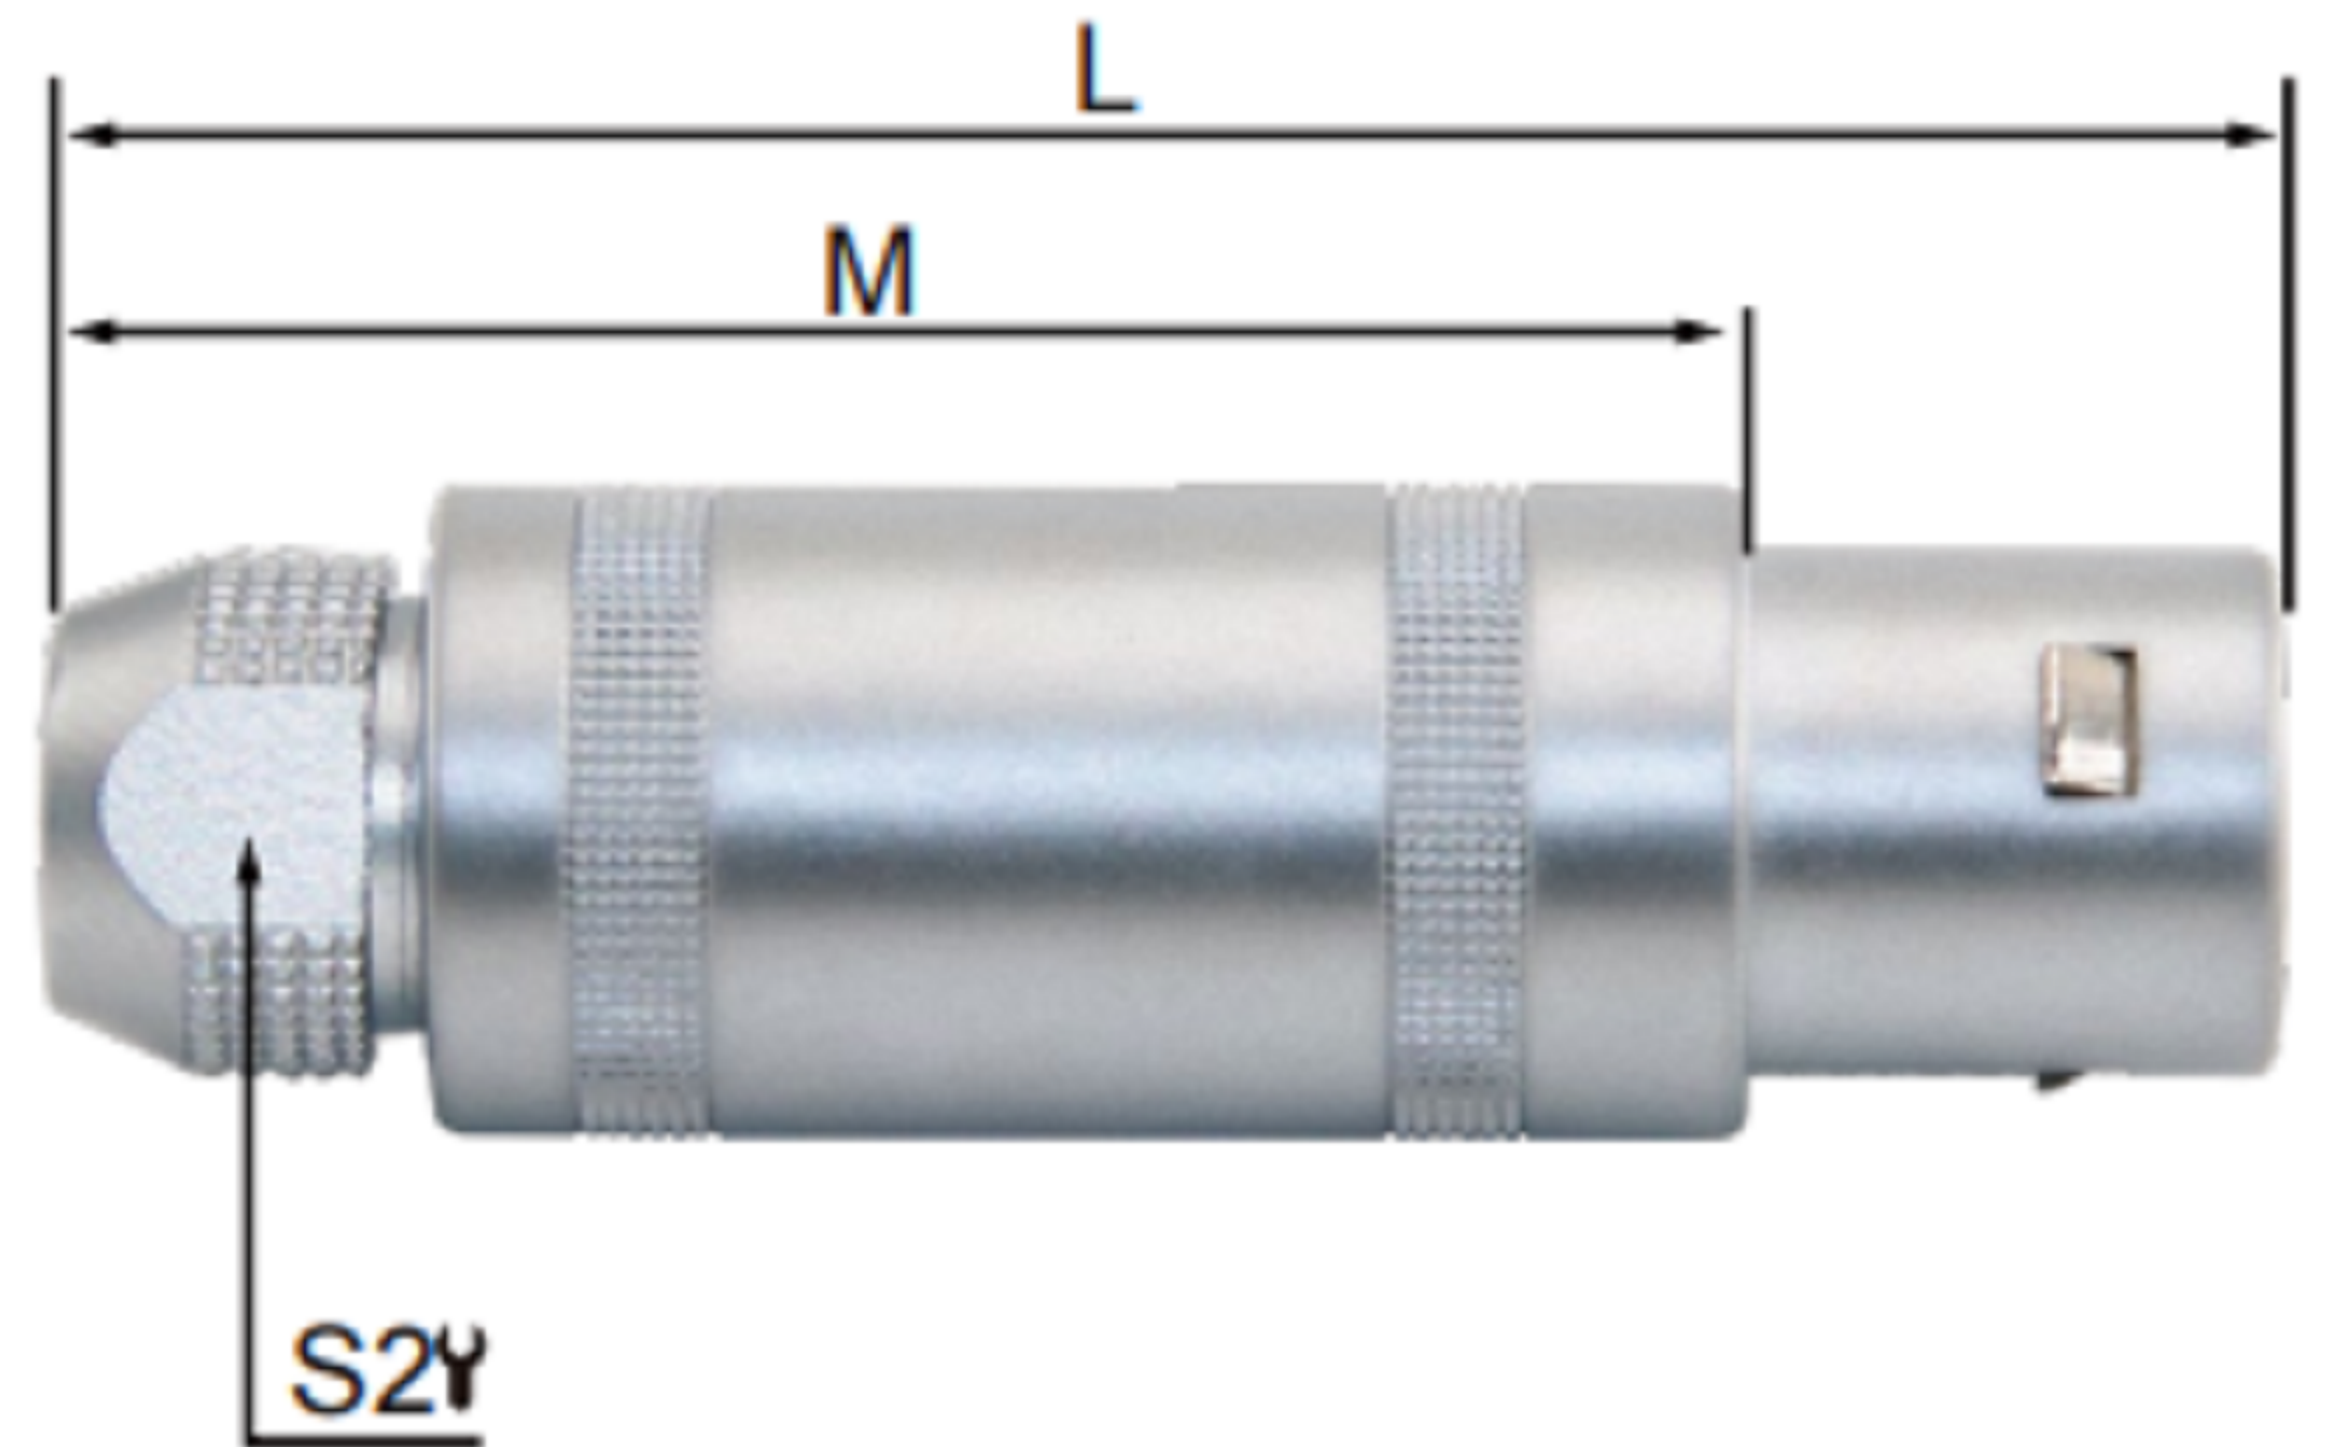

系列	壳体号	ØA	L	M	S1Y	S2Y
0S	P01	9.0	34.5	24.5	7	6.5
1S	P01	12	42.5	31.5	9	8.5
2S	P01	14.8	52	40	12	11
3S	P01	17.8	61	46	14	14


S系列金属连接器技术特性

机械寿命：	>5000次	盐雾试验：	96hr
最大潮湿：	在60℃时最高达到95%	抗冲击性能：	100g,6ms
屏蔽性能：	75dB(10MHz) 40dB(1GHz)	防护等级：	IP50
抗振动性能：	15g[10Hz~2000Hz]	工作温度：	-55℃~+125℃

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	P01
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/13/19	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R1