


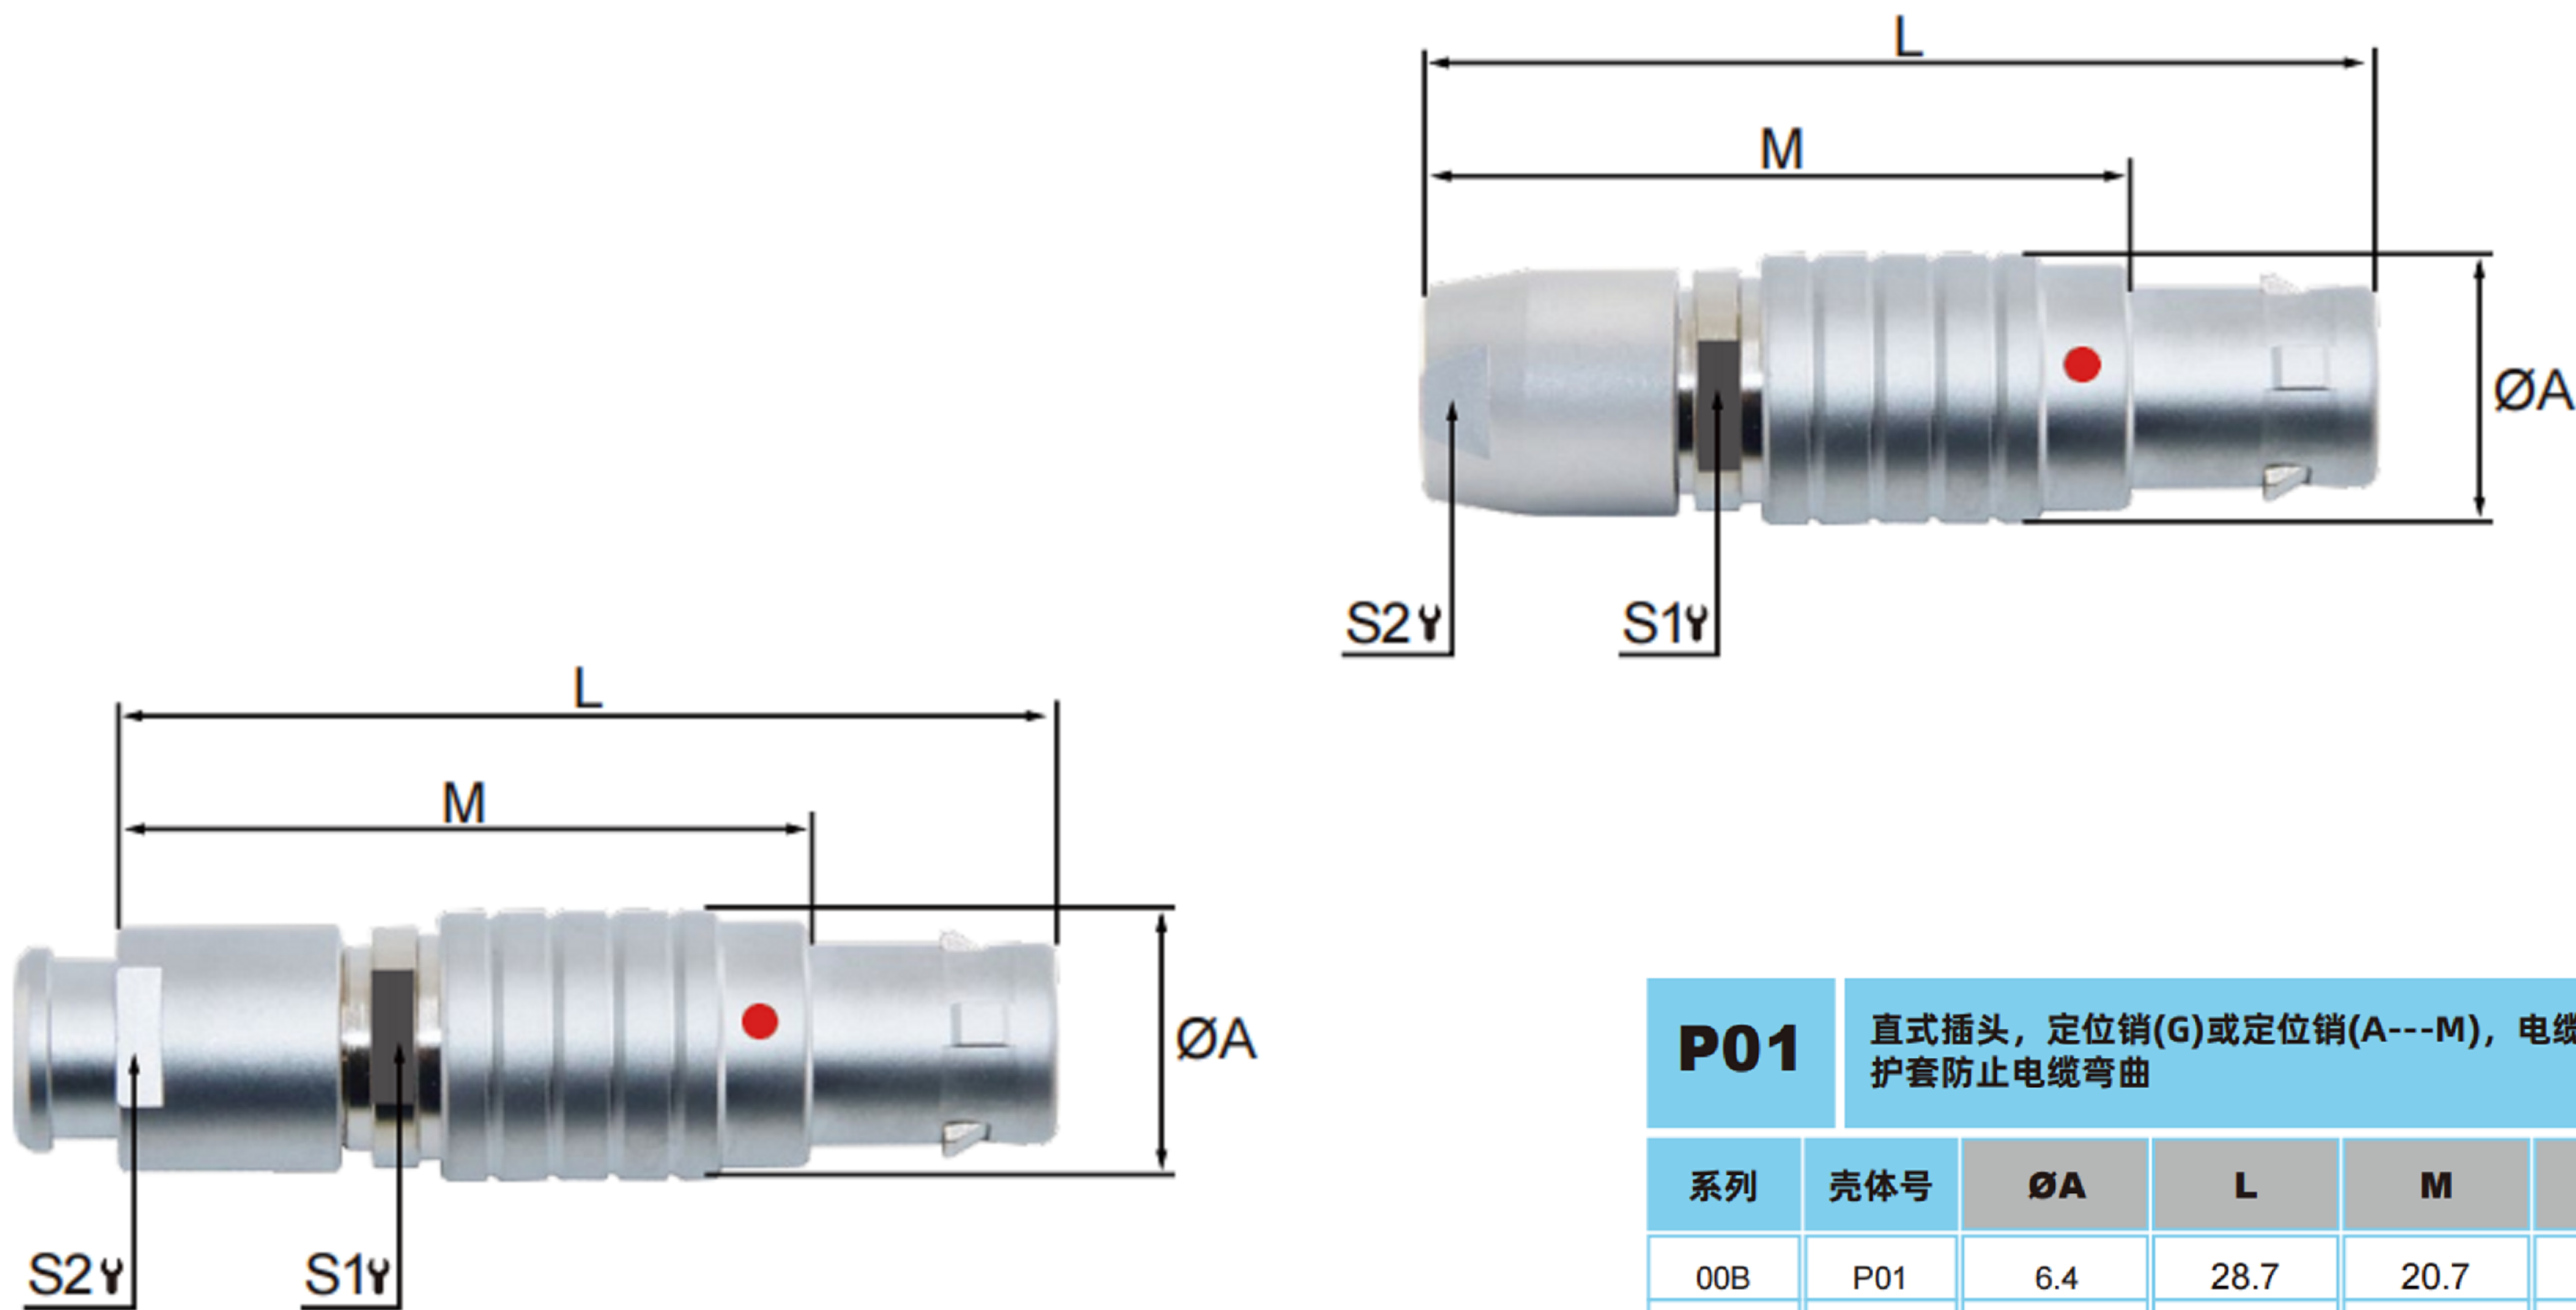


机械寿命： >5000次
最大潮湿： 在60℃时最高达到95%
屏蔽性能： 75dB(10MHz) 40dB(1GHz)
抗振动性能： 15g[10Hz~2000Hz]

直式插头，定位销(G)或定位销(A---M)，电缆线夹固定电缆，护套防止电缆弯曲

系列	壳体号	ØA	L	M	S1Y	S2Y
00B	P01	6.4	28.7	20.7	5.5	5.0
0B	P01	9.5	35.0	25.0	8.0	7.0
1B	P01	12.0	42.0	31.0	10.0	9.0
2B	P01	15.0	49.0	37.0	13.0	12.0
3B	P01	18.0	56.5	41.5	15.0	15.0

盐雾试验： 96hr
抗冲击性能： 100g,6ms
防护等级： IP50
工作温度： -55℃~+125℃

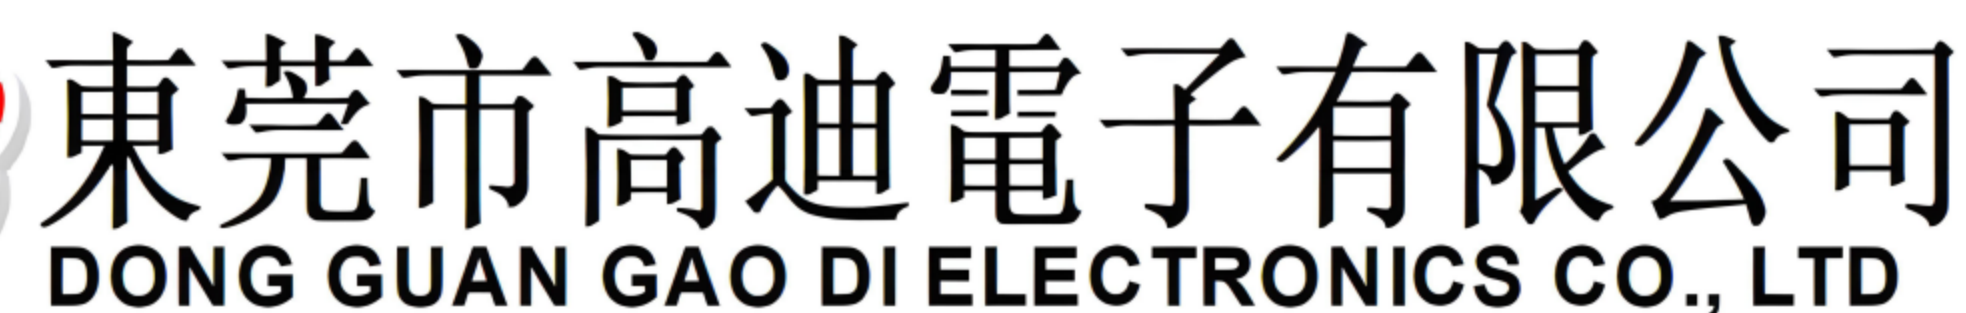

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	±0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	±0.3				
	Above 15 ~ 30	±0.4				
	Above 30 ~ 50	±0.5				
	Angle	±0.3°				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR		
Jack Lu	12/13/19						
CHECKED BY:	DATE	FINISH		MODLE	PO1		
Jacky Chen	12/13/19						
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.		SIZE	
		SHEET NO.	1 of 1	PART NO.		A4	
						VER	
Tony Kao	12/13/19					R1	

7			
ITEM NO.	DESCRIPTION	DRAWN	DATE