


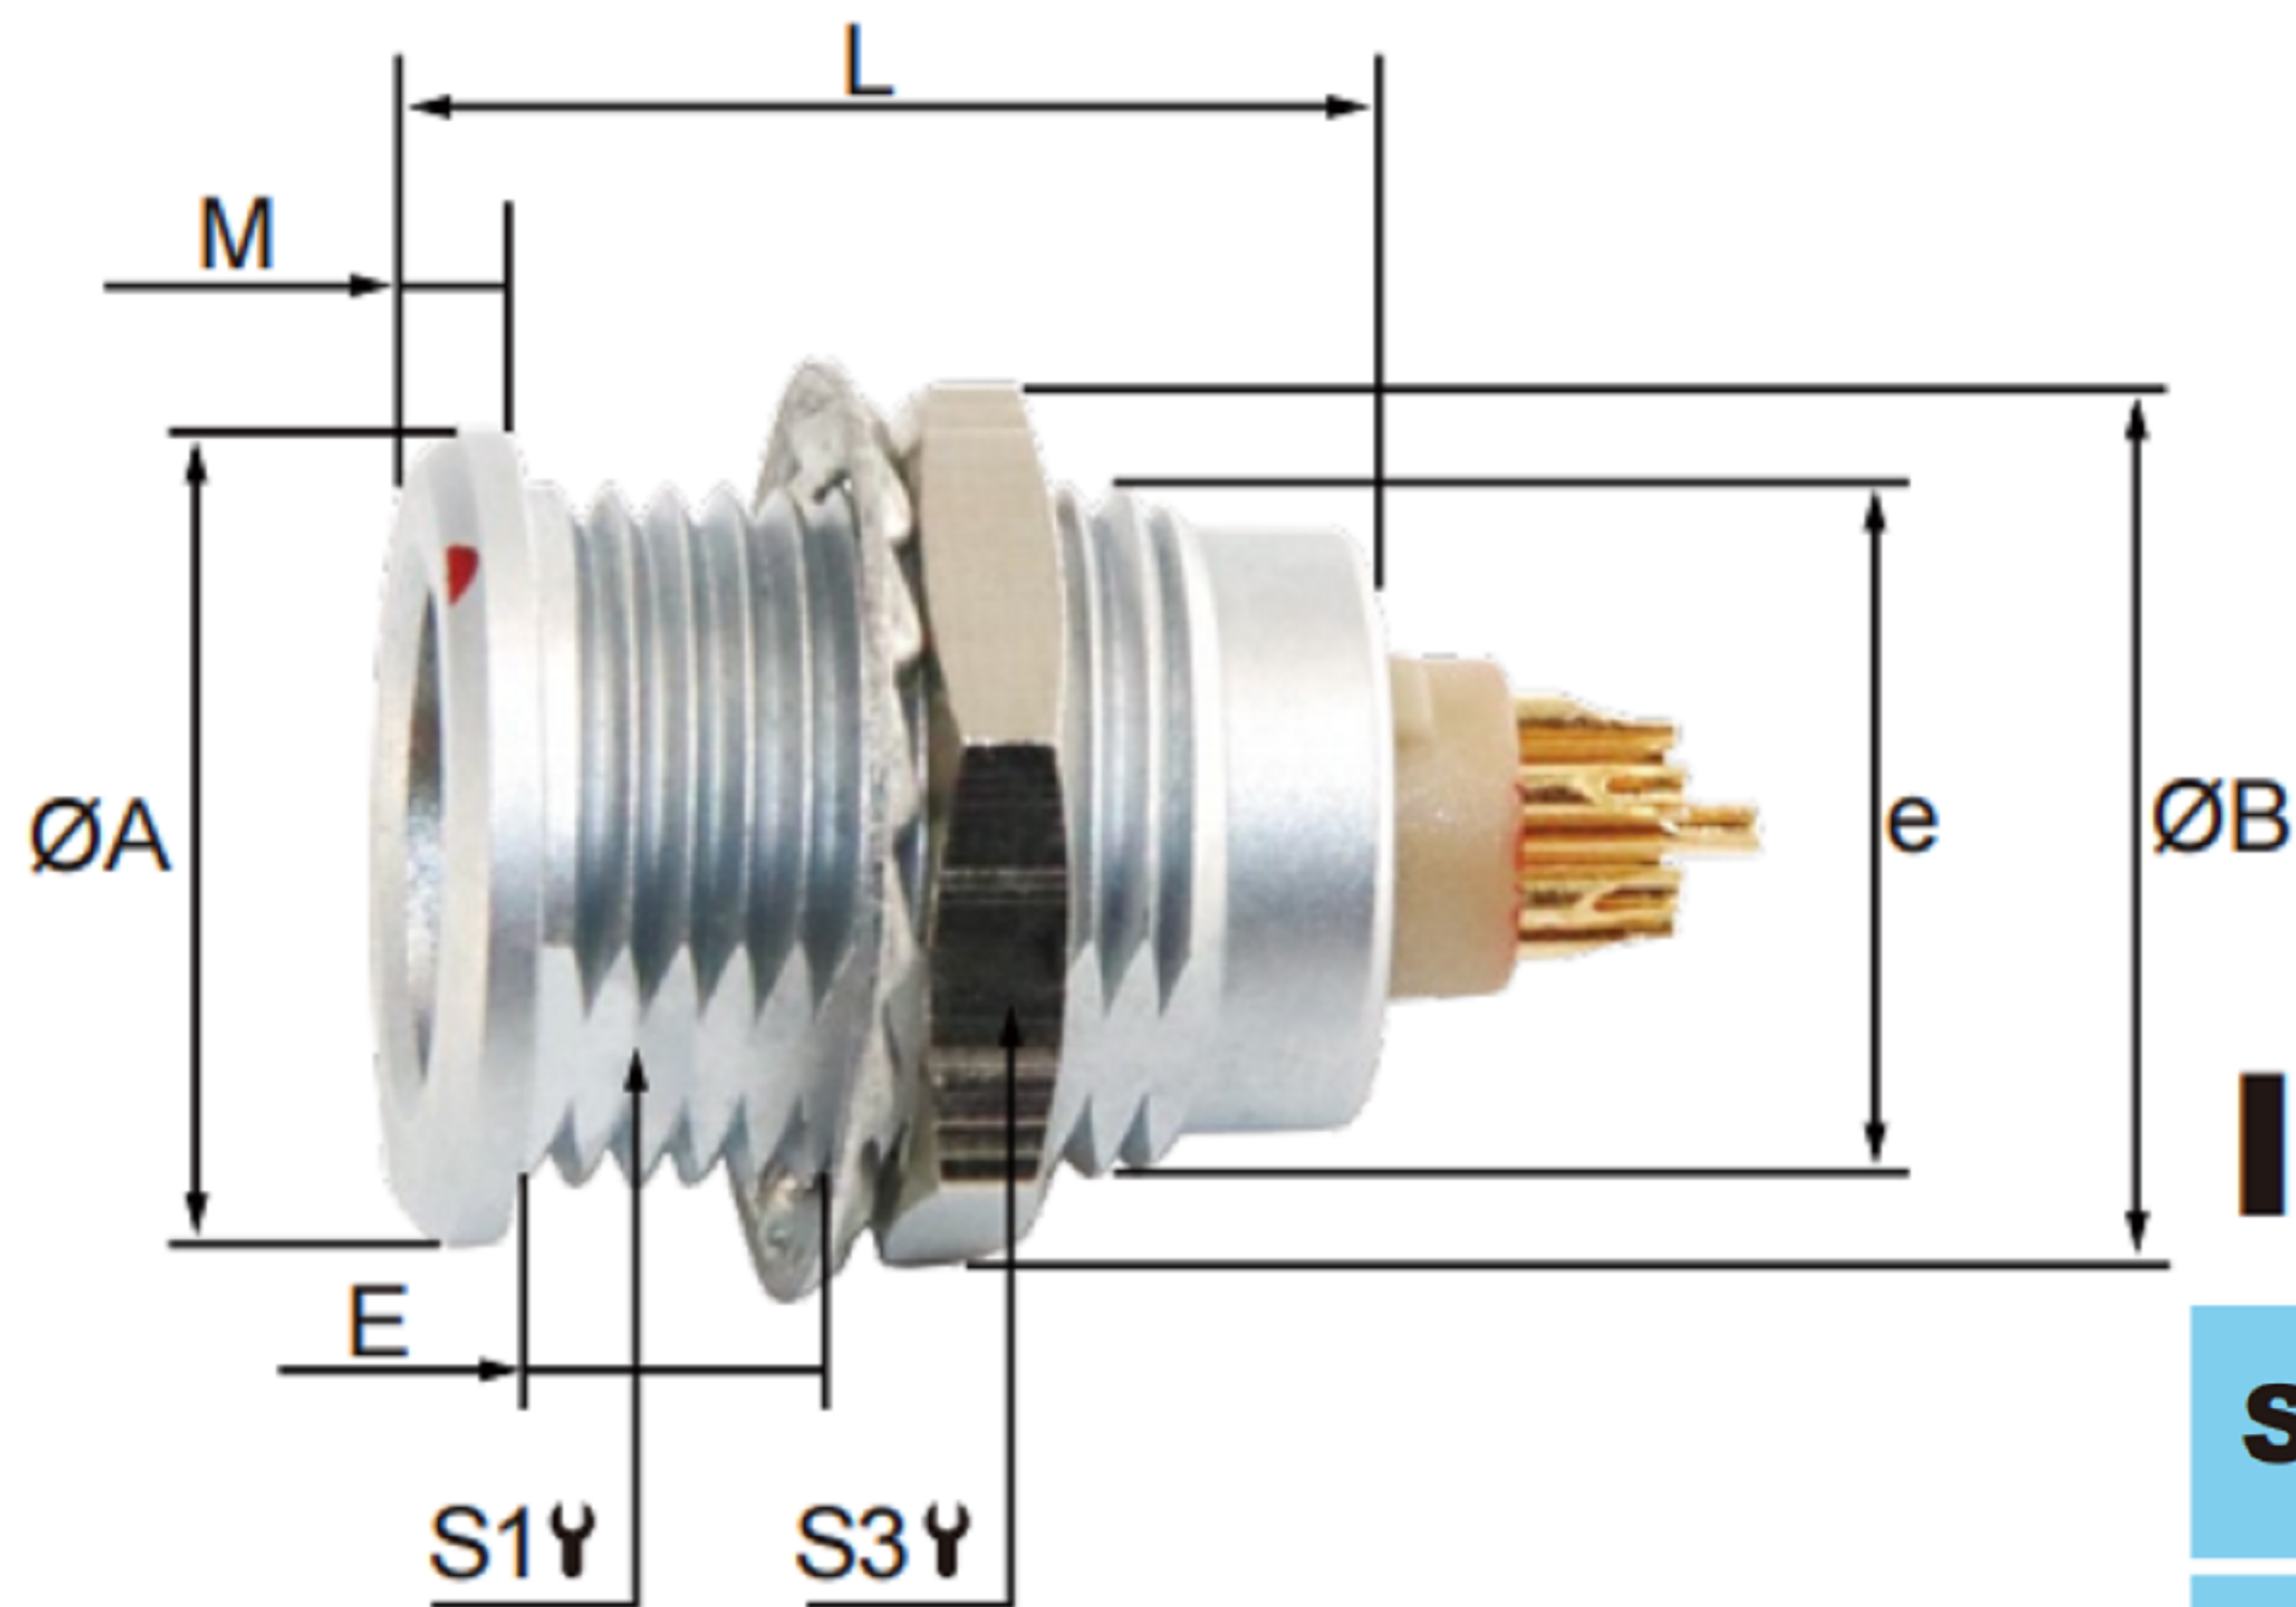

IP50

S01

外装内固定通用型插座，机箱内螺母固定，
定位销(G)或定位销(A---M)

系列	壳体号	ØA	ØB	L	M	E	S1Y	S3Y	e
00B	S01	8	10.2	15.5	1.0	6.0	6.3	9	M7*0.5
0B	S01	10	12.4	20.7	1.2	7.0	8.2	11	M9*0.5
1B	S01	14	15.8	23.0	1.5	7.5	10.5	14	M12*1.0
2B	S01	18	19.2	26.7	1.8	8.5	13.5	17	M15*1.0
3B	S01	21	25.0	30.7	2.0	11.5	16.5	22	M18*1.0

B系列金属连接器技术特性

机械寿命：>5000次

最大潮湿：在60℃时最高达到95%

屏蔽性能：75dB(10MHz) 40dB(1GHz)

抗振动性能：15g[10Hz~2000Hz]

盐雾试验：96hr

抗冲击性能：100g,6ms

防护等级：IP50

工作温度：-55℃~+125℃



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	S01
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/13/19	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R1