


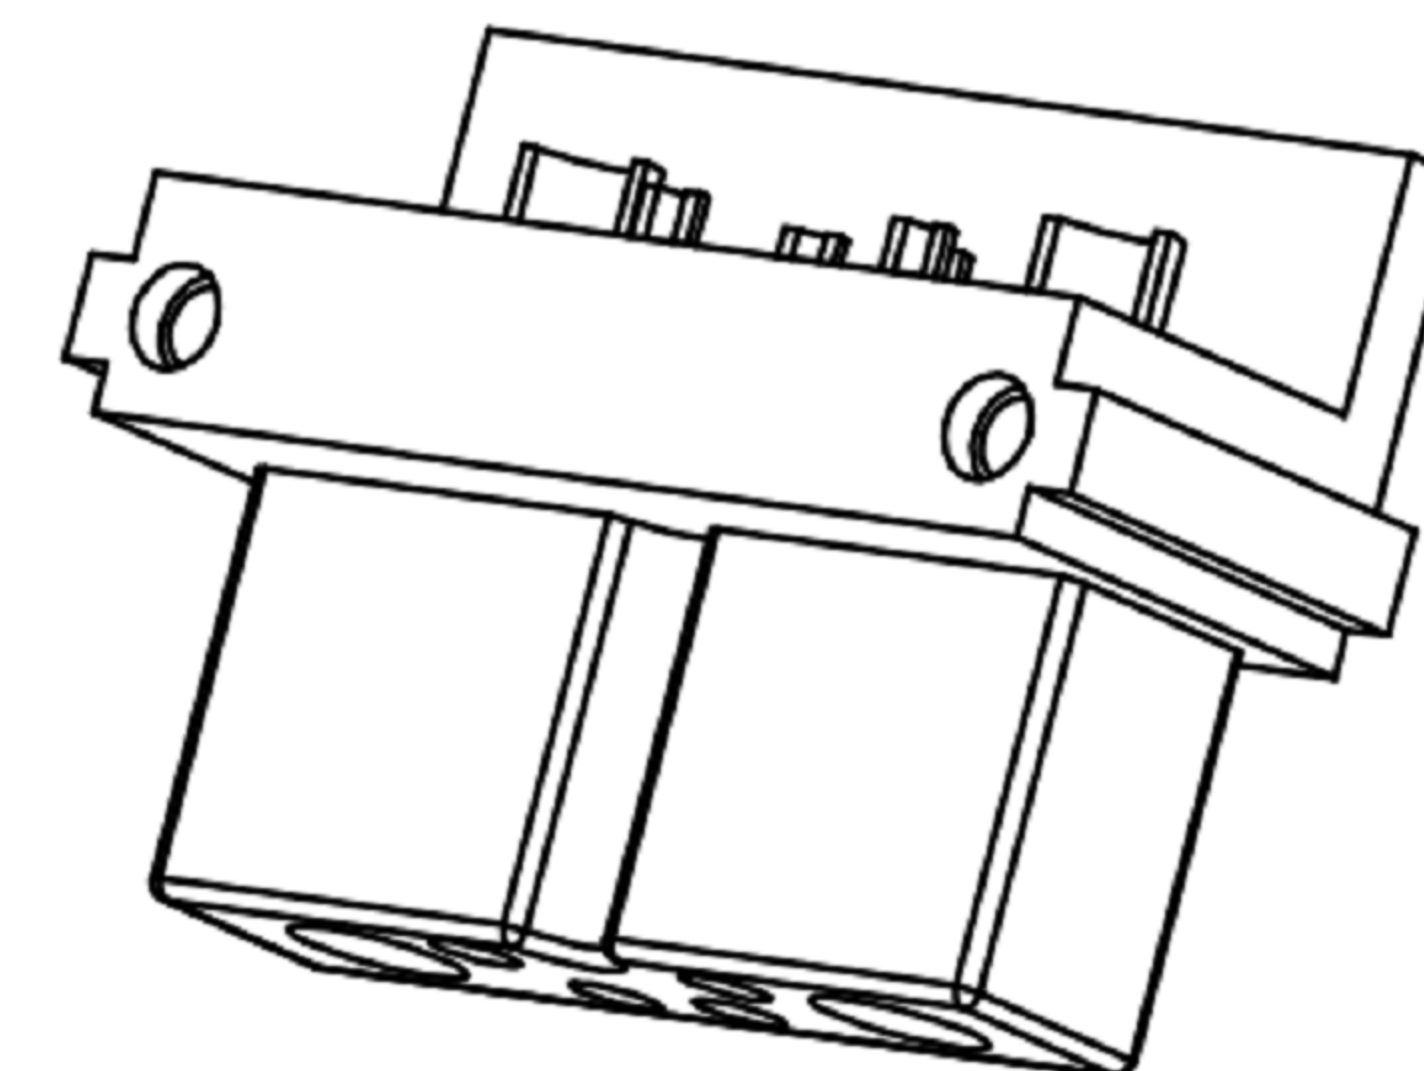

主要技术特性要求:

1. 使用条件:

环境温度: $-30\sim 80^{\circ}\text{C}$

相对湿度: 90% (55°C)

2. 额定负荷: DC300V 30A

3. 接触电阻: $\leq 10\text{m}\Omega$

4. 绝缘电阻: $\geq 100\text{M}\Omega$

5. 耐压: AC1500V (50Hz) 1min

6. 插拔力: 15~60N

7. 寿命: 5000次

8. 盐雾试验: 48 hour

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^{\circ}$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	GD-TX-DCD22A-204F
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/13/19	1 : 1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R1