
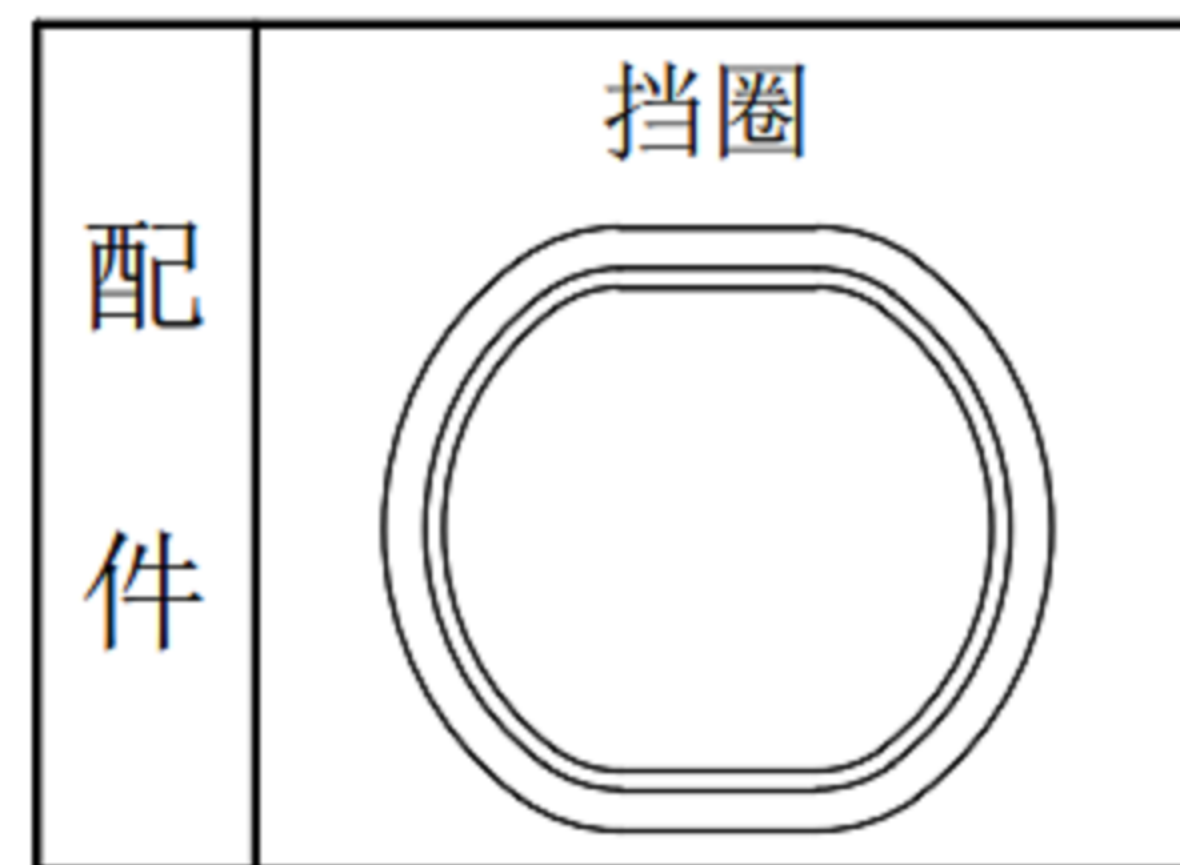
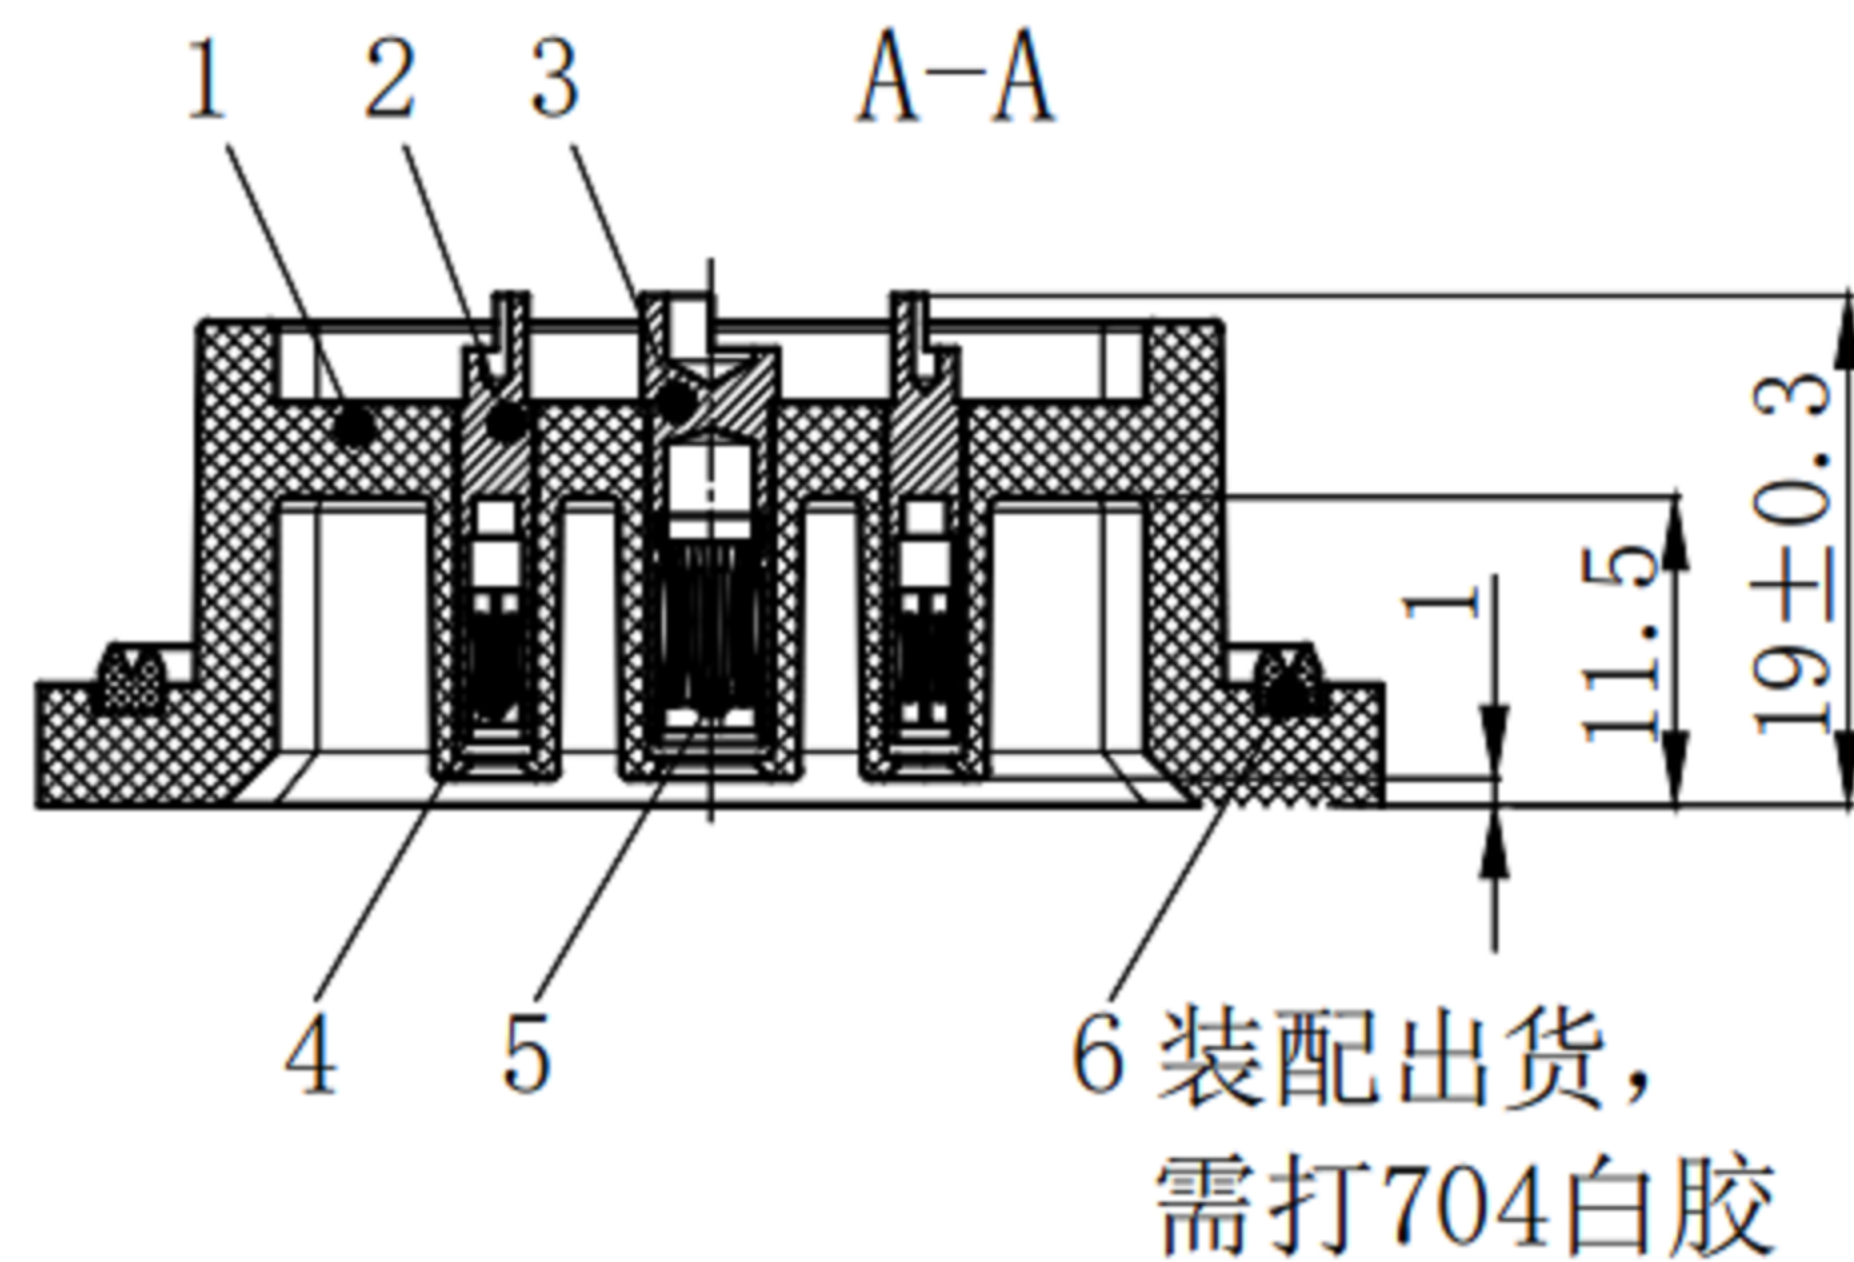
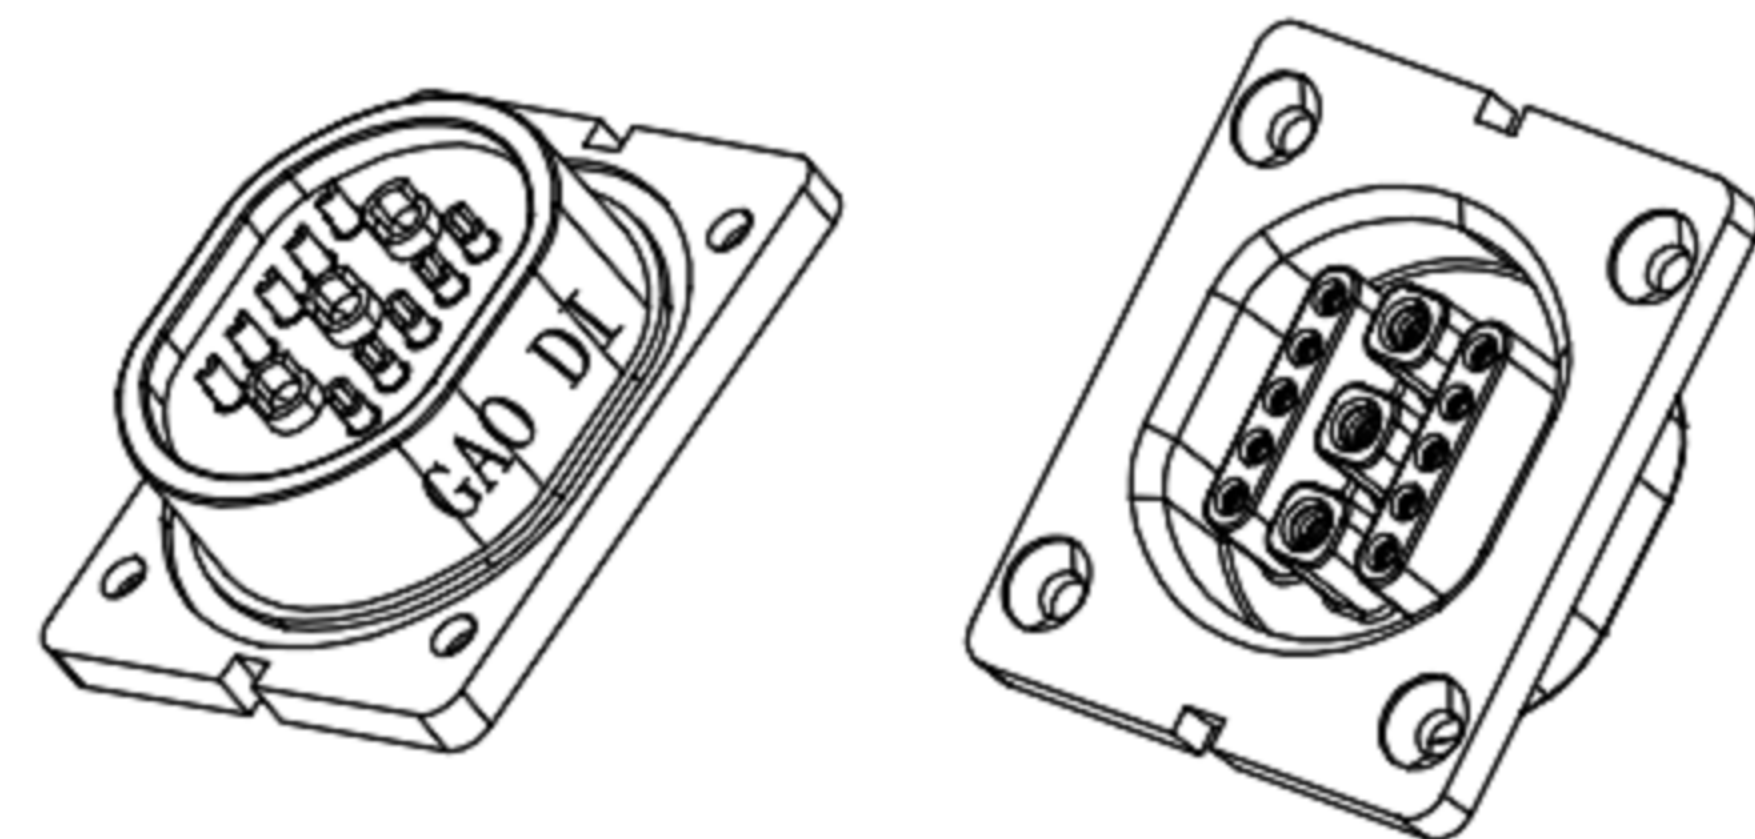
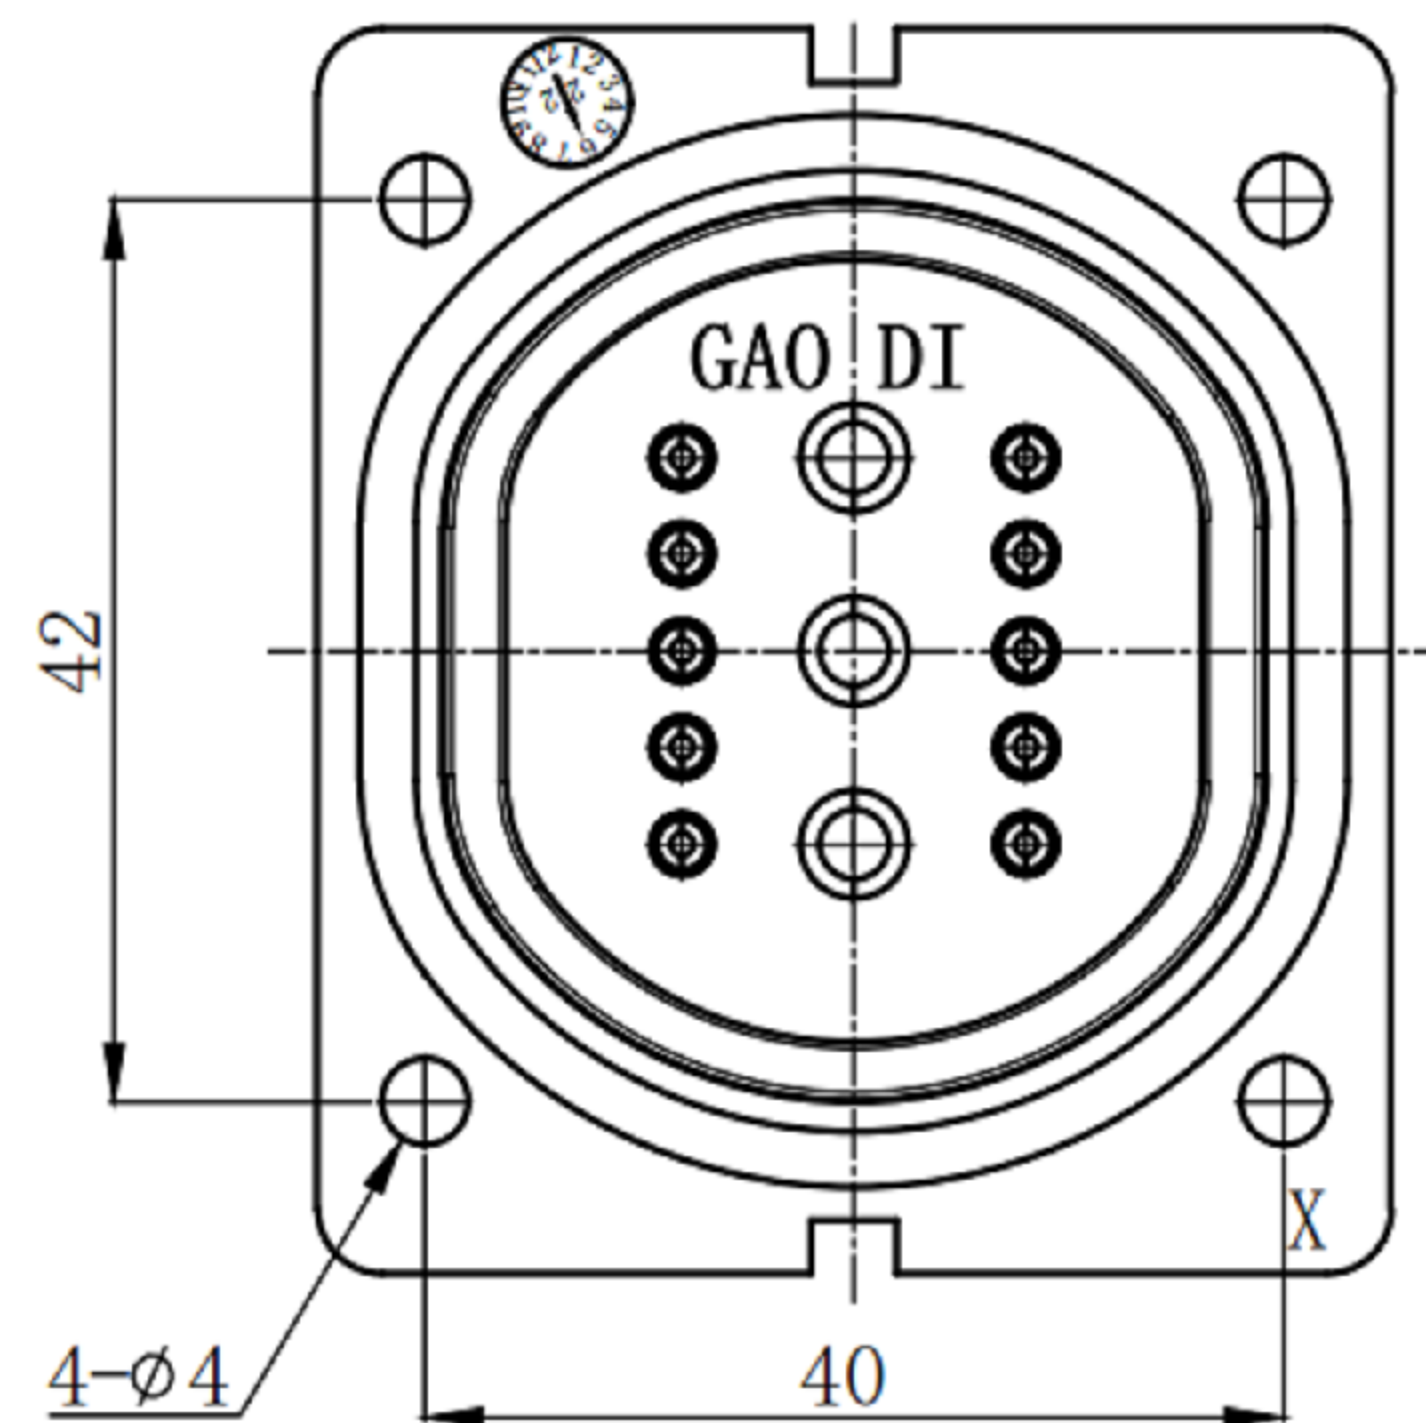
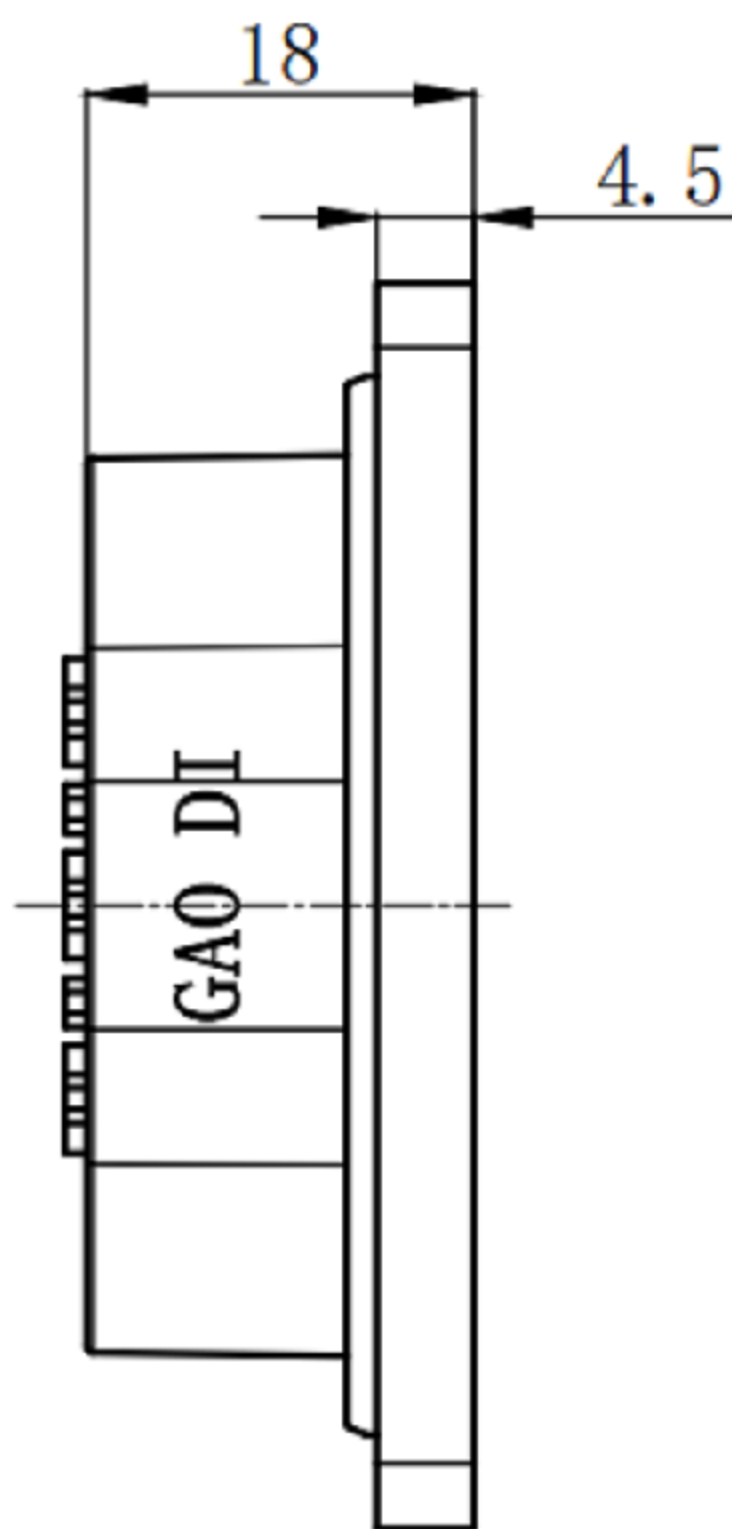


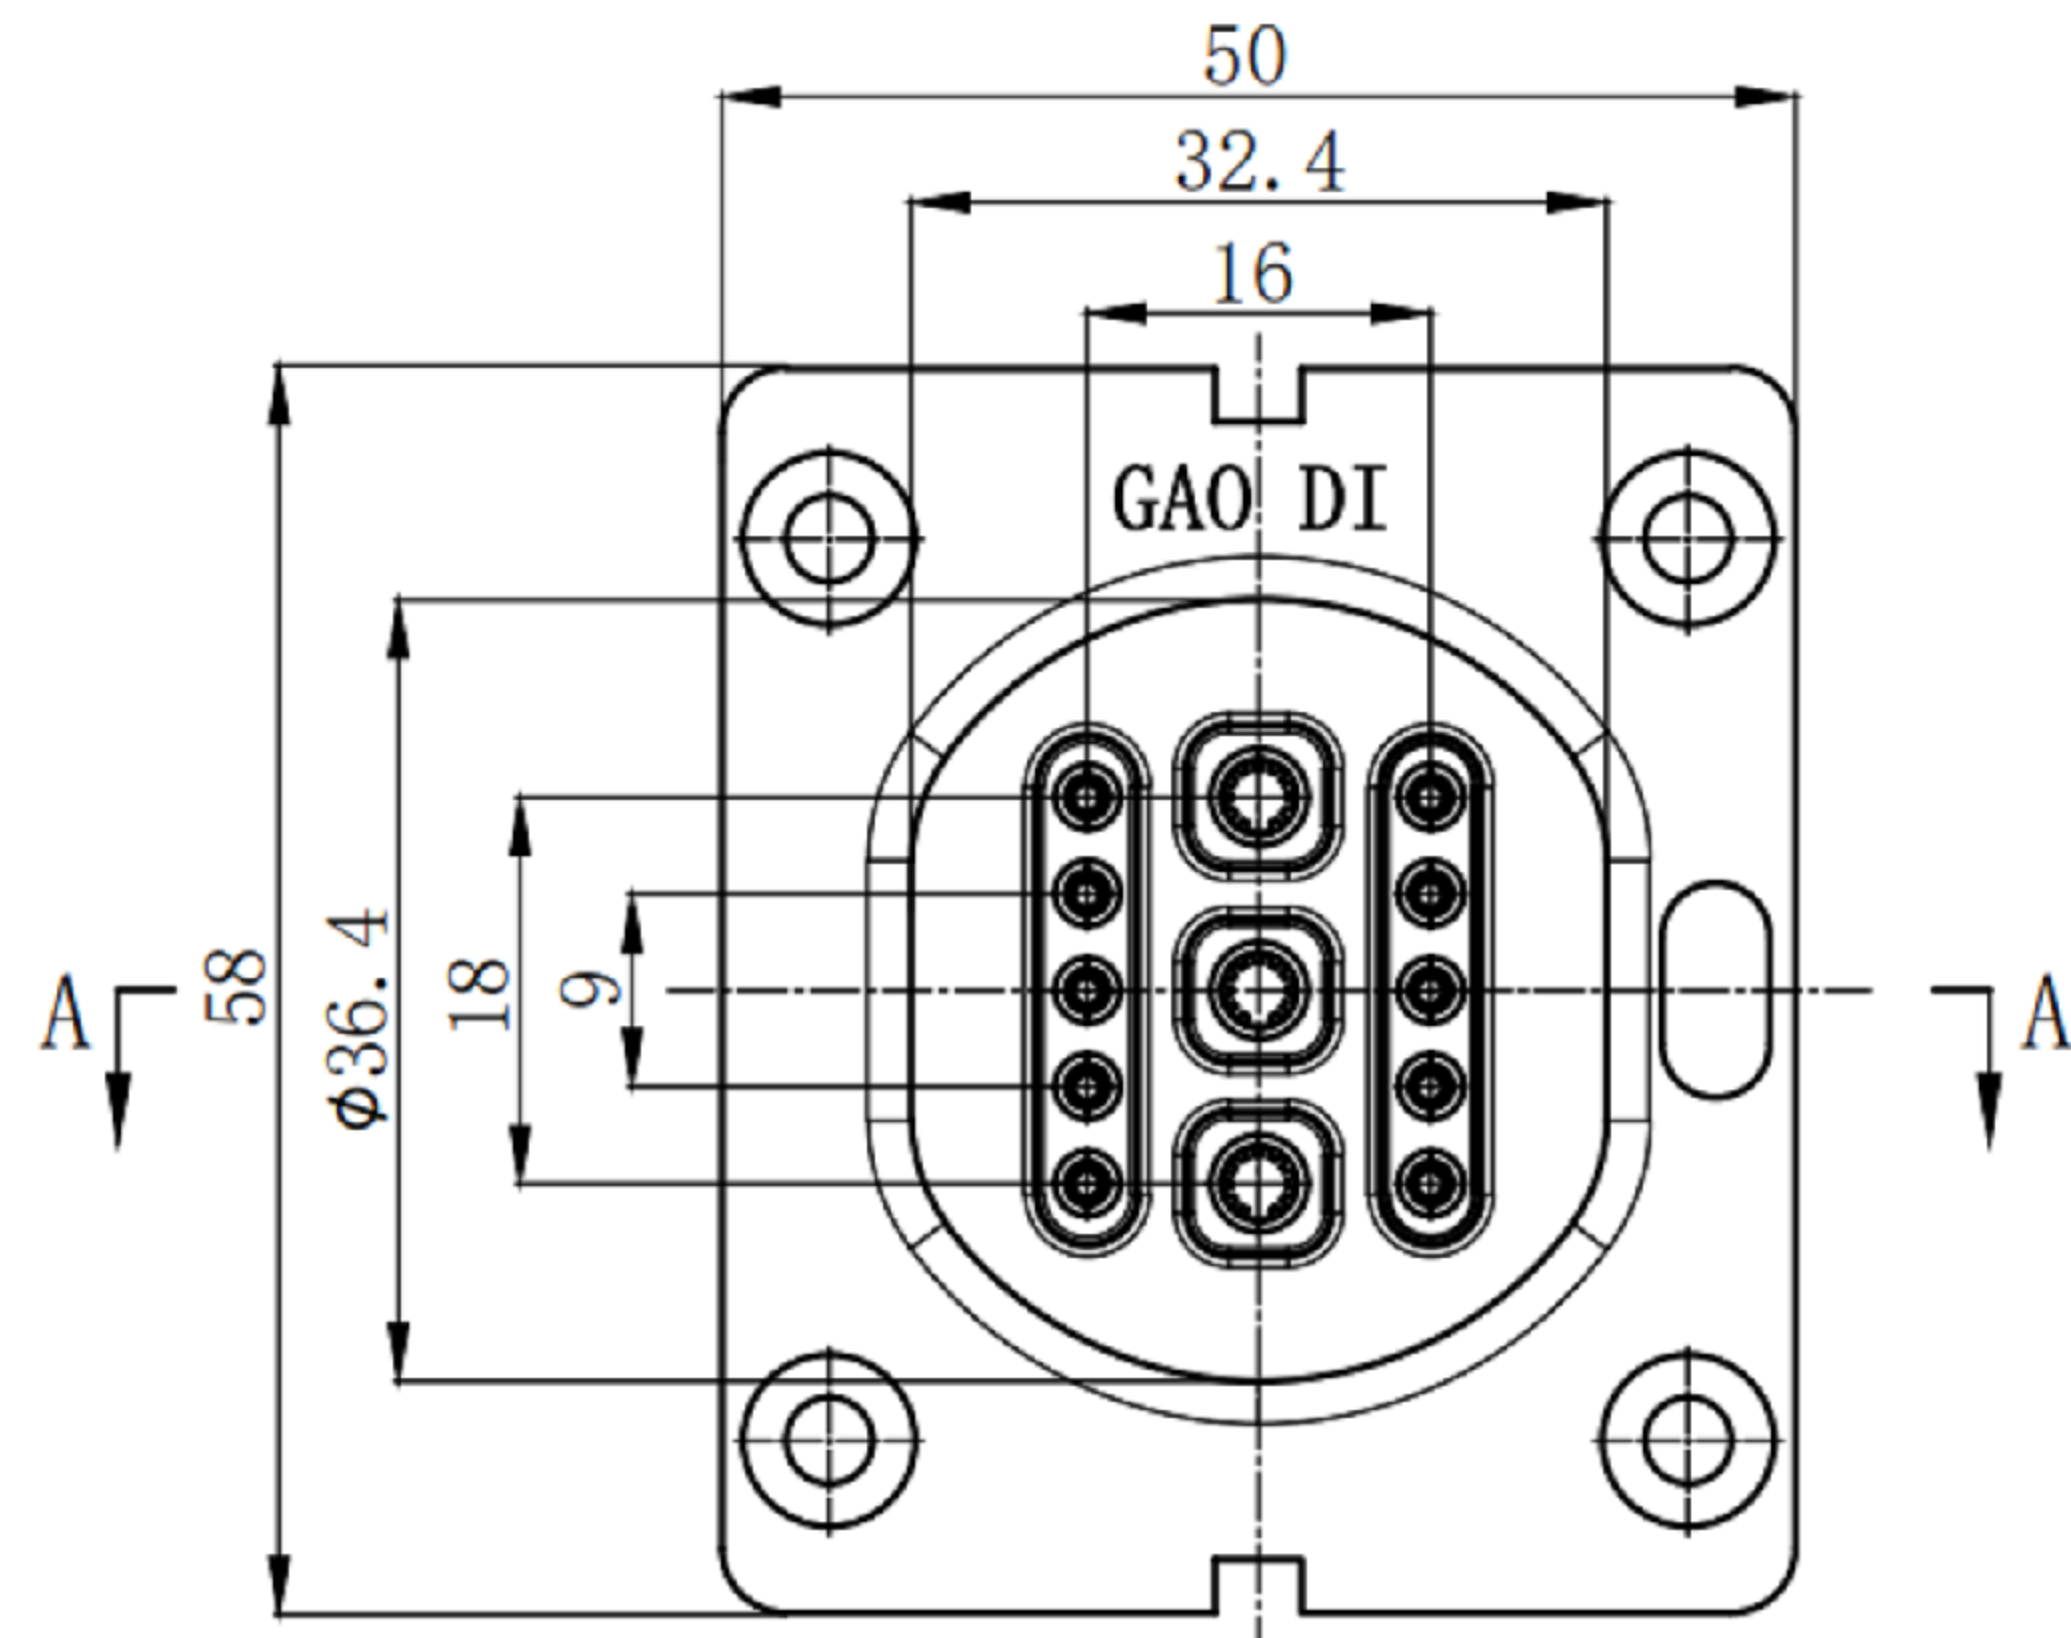

- 主要技术特性要求:
1. 环境温度: $-25\sim 80^{\circ}\text{C}$
 2. 额定电流: 电源Pin:35A; 信号Pin:8A
 3. 接触电阻: $\leq 20\text{m}\Omega$
 4. 绝缘电阻: $\geq 20\text{M}\Omega$
 5. 耐压: 500V AC (50Hz) 1min
 6. 插拔力: 40~80N
 7. 公母对插寿命: ≥ 5000 次
 8. 符合RoHS2.0及其修订指令要求
 9. 未注尺寸公差按GB/T14486-2008 MT5
 10. 阻燃符合UL94-V0

7	8.260.0004	挡圈	1	注塑成型	PBT	黑色	配件发货
6	8.370.0021	防水圈	1	压制成型	硅橡胶	黑色	打胶装配出货
5	8.289.0021	3038-6冠簧	3	冲压成型	铍青铜	镀金1 μ "	
4	8.510.0666	1521-45冠簧	10	冲压成型	铍青铜	镀金1 μ "	
3	8.510.0005	大针	3	车削加工	Hpb59-1黄铜	镀金1 μ "	
2	8.510.0032	小针	10	车削加工	Hpb59-1黄铜	镀金1 μ "	
1	8.005.0164	底座	1	注塑成型	PA66+GF30%	黑色	
序号	零件图号	零件名称	数量	工艺类别	材料/规格型号	表面处理	备注

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^{\circ}$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/13/19			
CHECKED BY:	DATE	FINISH	MODLE	GD-AC-DCD-1350A-M外形图
Jacky Chen	12/13/19			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	12/13/19	1:1		A4
		SHEET NO.	PART NO.	VER
		1 of 1		R1