


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

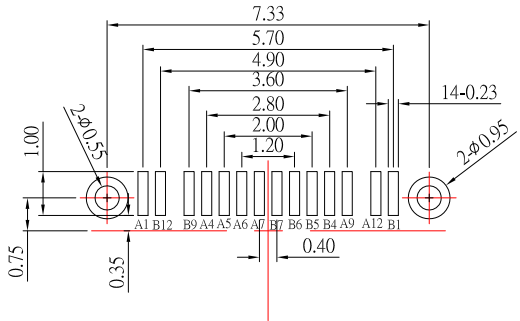

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Electrical:




- Rating: 30V DC , 3.0 A
- Dielectric Withstand Voltage: 500V AC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 1000 MΩ Min

Material:

- Housing: LCP
- Contact: C7025
- Mid Plate: SUS

Finish:

- Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- Mid Plate: Tin under Plated surface layer

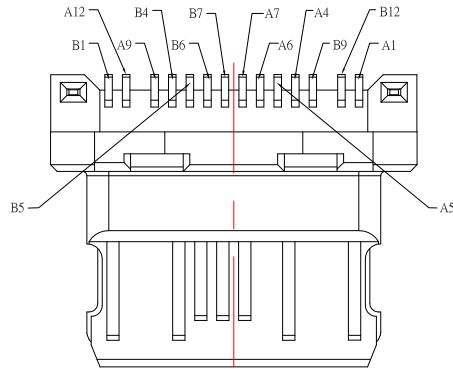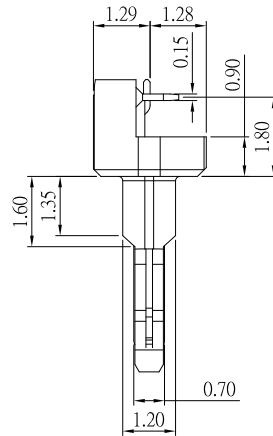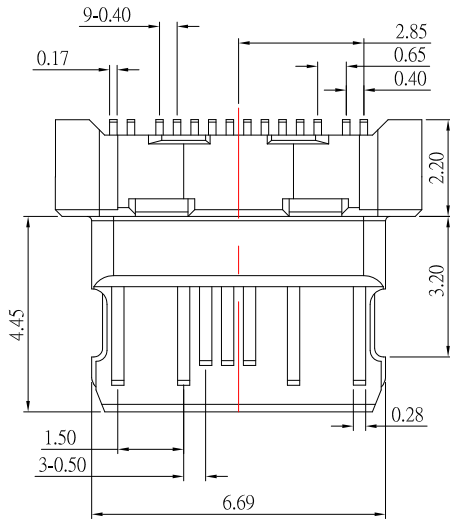

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	08/05/22			
CHECKED BY:	DATE	FINISH	MODLE	USB TYPE C 2.0 卡勾沉板
Jacky Chen	08/05/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SBC-140M2-202-S412
Tony Kao	08/05/22	1 : 1		
		SHEET NO.	PART NO.	SBC-140M2-202-S412
		1 of 1		