

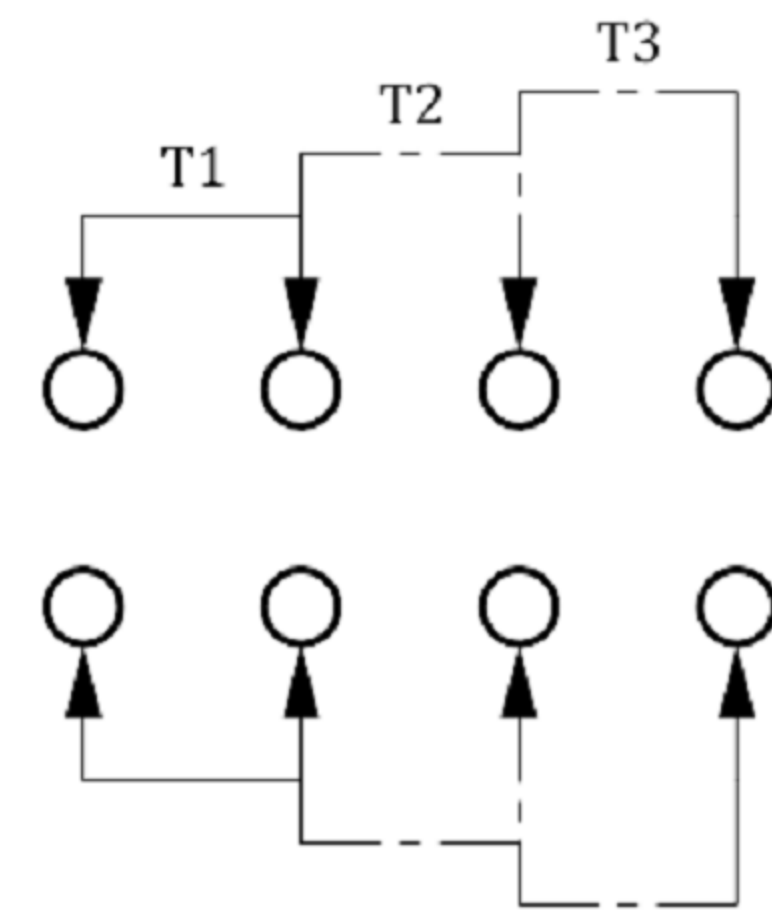
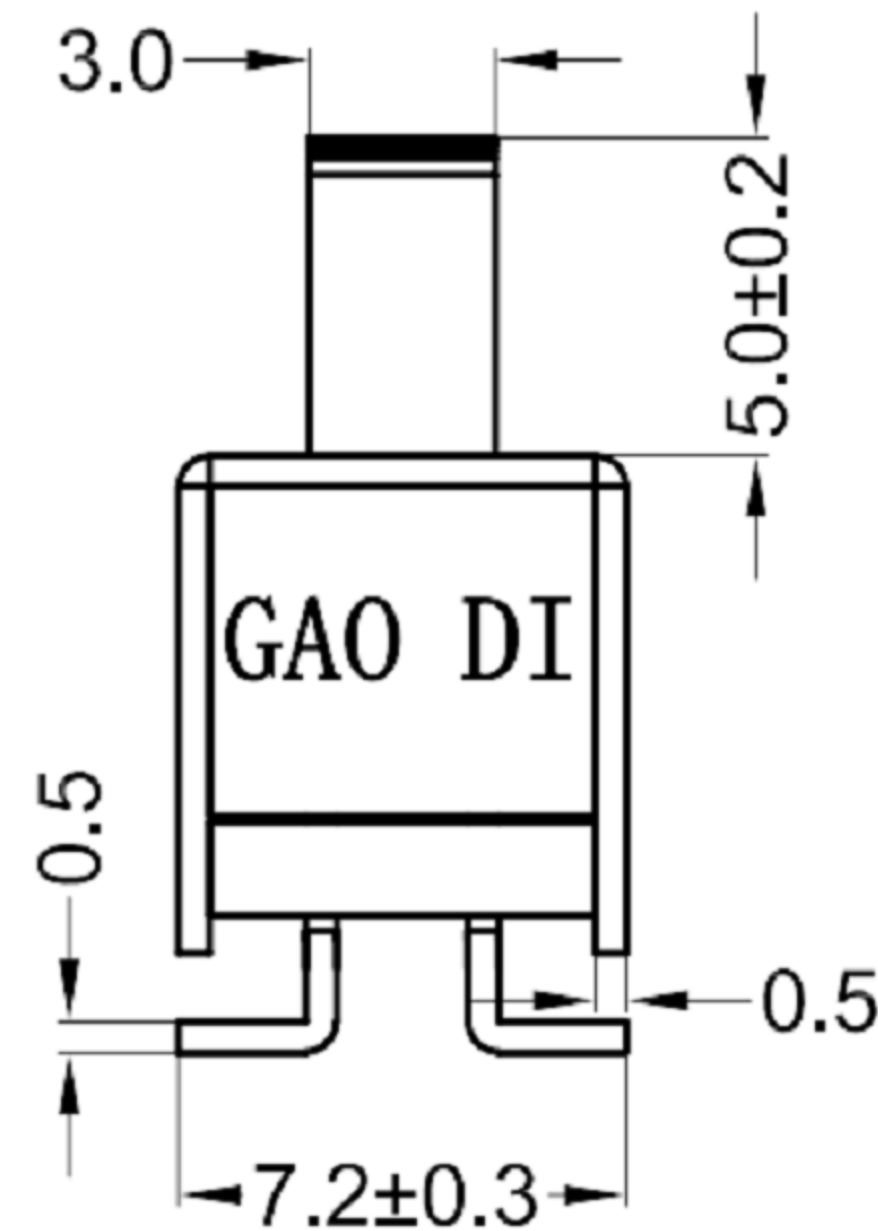
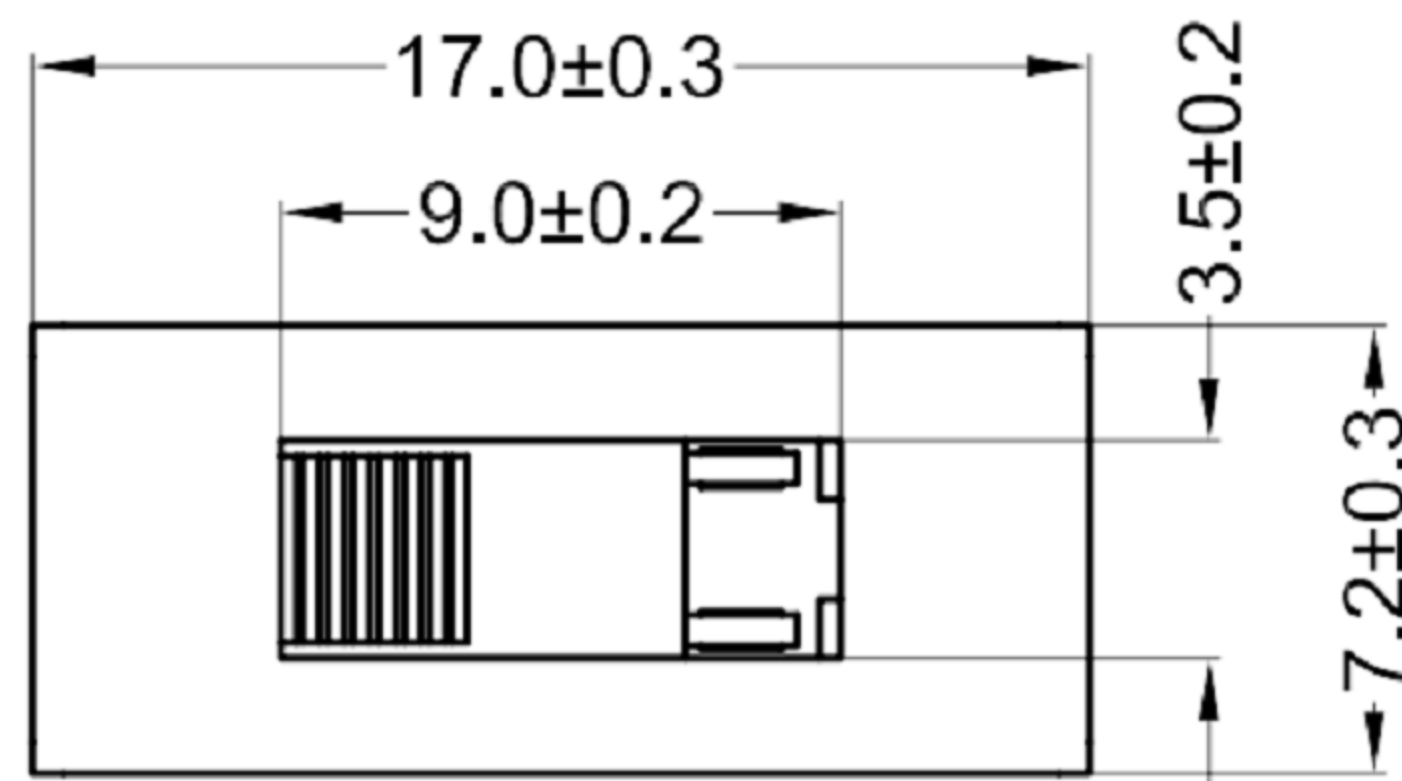


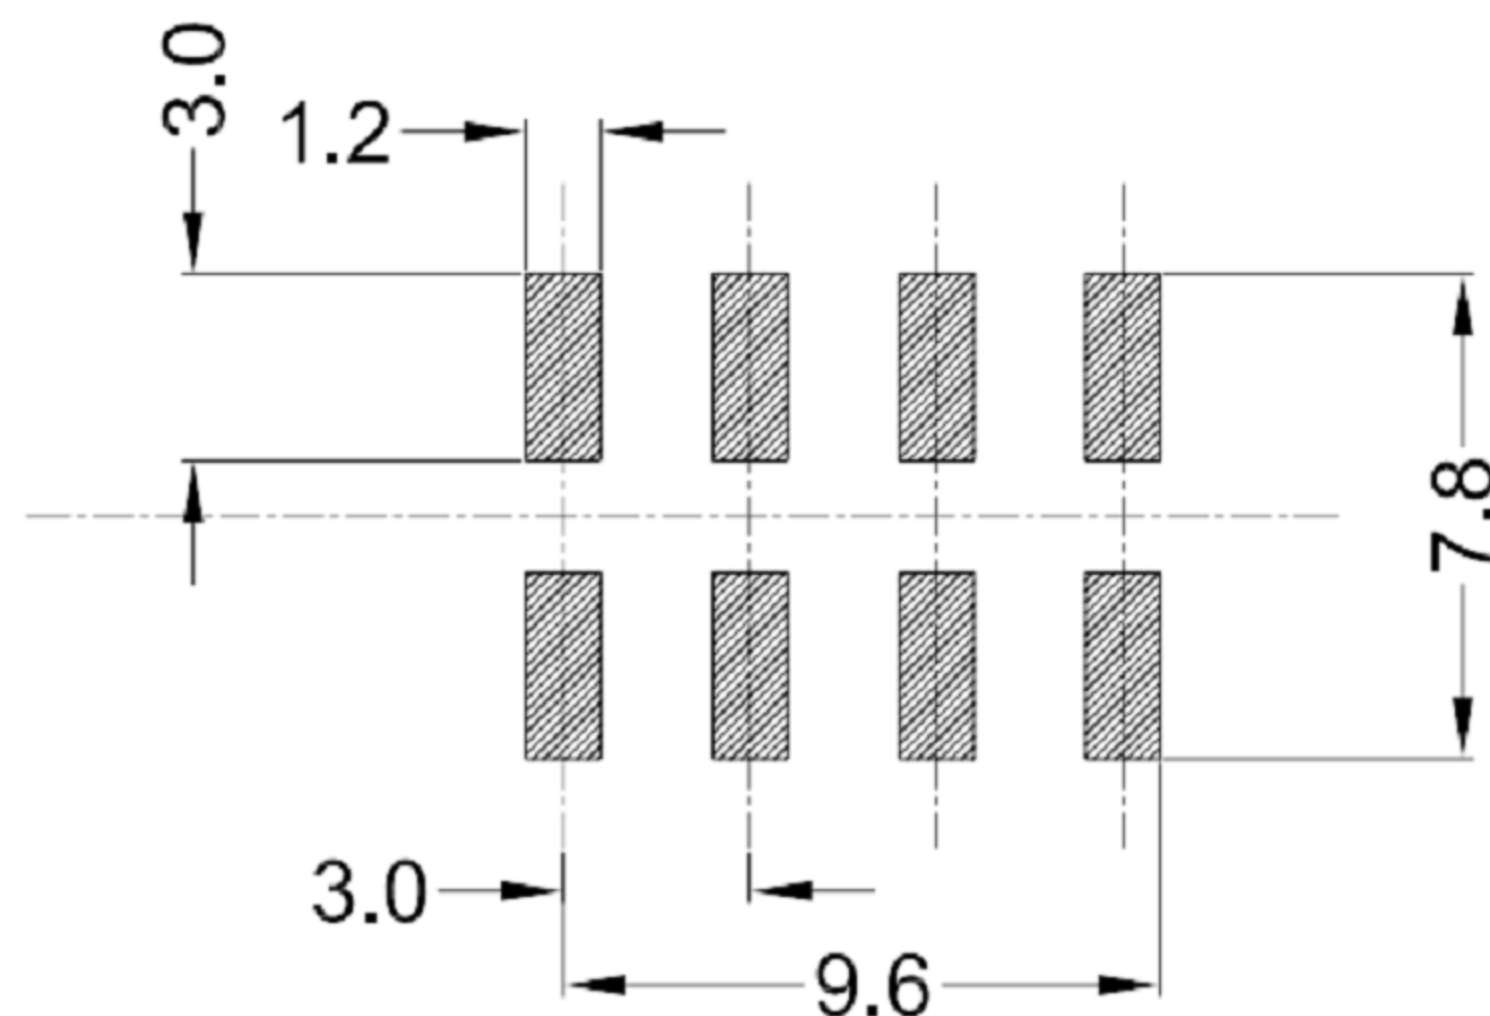

SCHEMATIC(SHORTING)

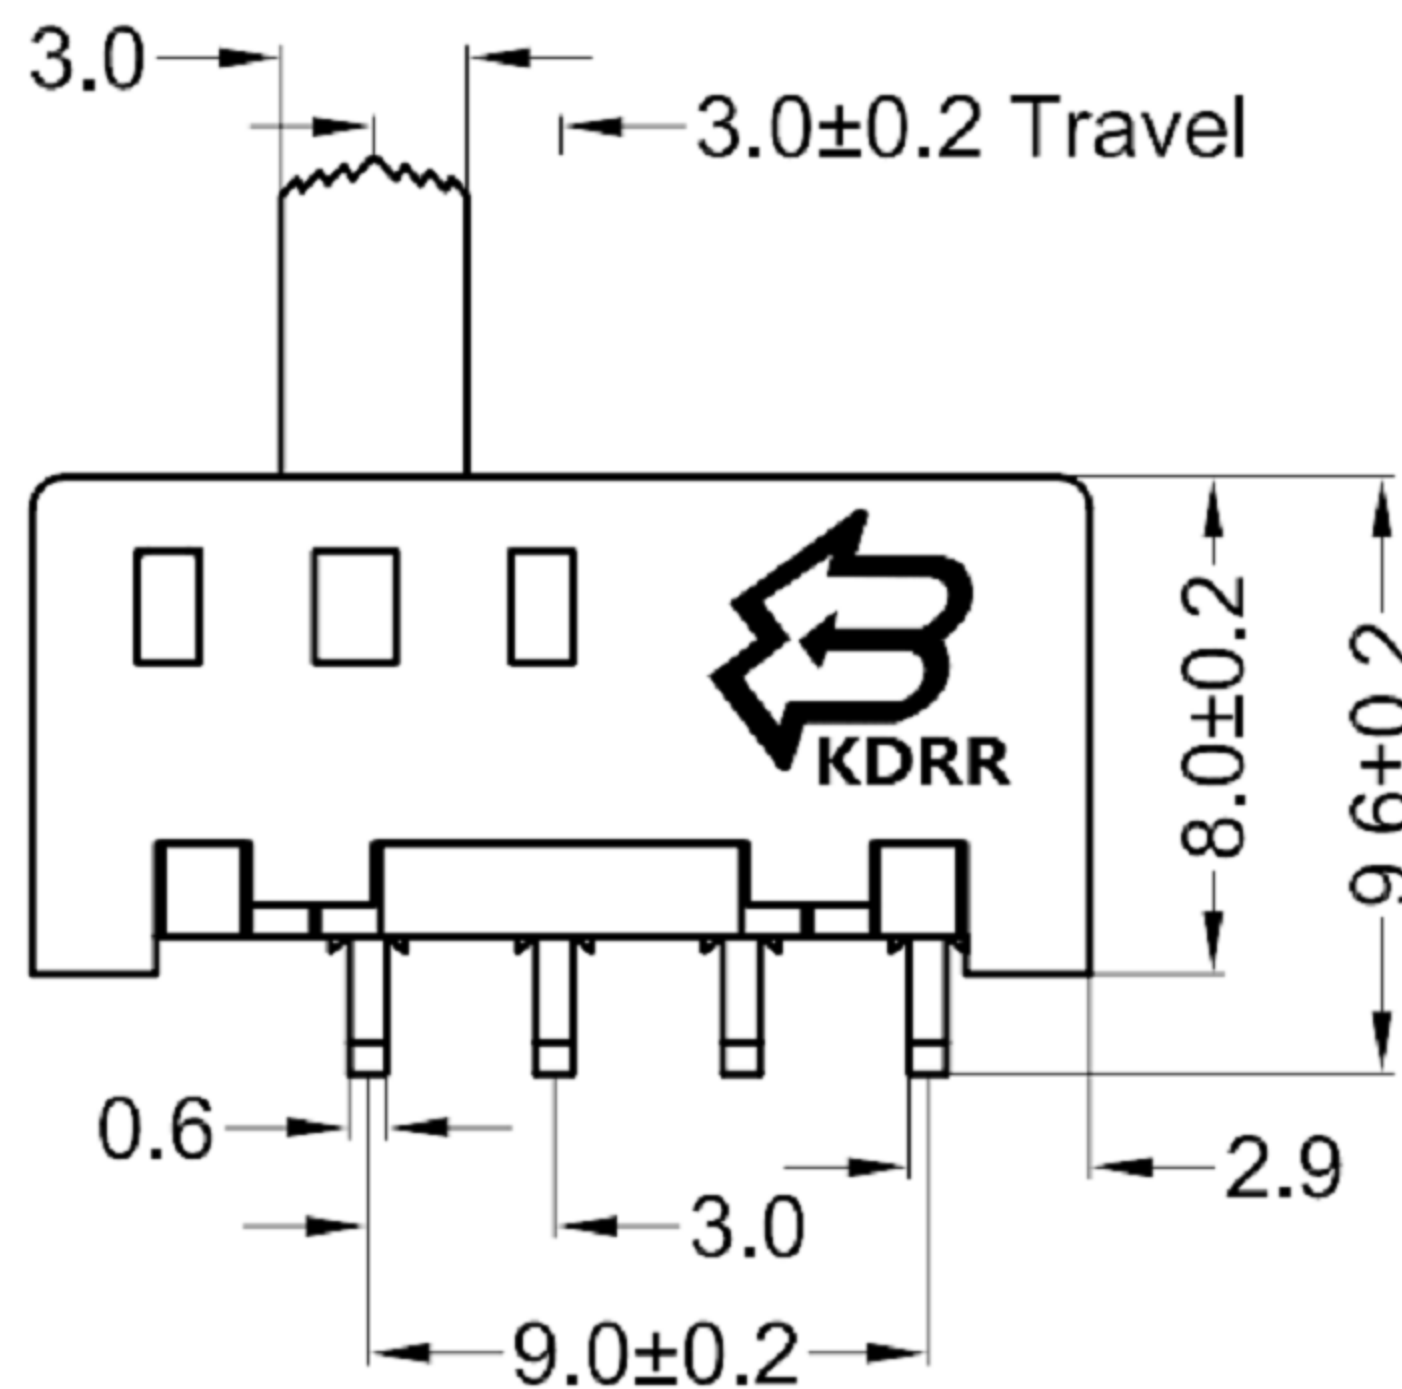

P.C.B LAYOUT

1. 额定负荷: 1A 250V 3A 125V AC
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250\pm 5^\circ\text{C}$
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\% \text{ RH}$
8. 操作力: 450gf 可
9. 手柄长度: 2mm-10mm 可定制

6	CONTACT CLIP	BRASS STRIP	2	Ag PLATED
5	SPRING	STEEL WIRE	2	NATURAL
4	TERMINAL	BRASS STRIP	8	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	PA66	1	BLACK
NO.	NAME	MATERIALS	Q'TY	REMARK




东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
Ming Ming Zou 07/23/13
CHECKED BY: DATE
Ning Ning Su 07/23/13
APPROVED BY: DATE
Jia Xiang 07/23/13

MAT'L		TITLE	SWITCH SERIES
FINISH		MODLE	SLIDE SWITCH
SCALE	1 : 1	DWG NO.	GD-SS-H25-2311-SMD
SHEET NO.	1 of 1	PART NO.	
			SIZE A4
			VER R2