

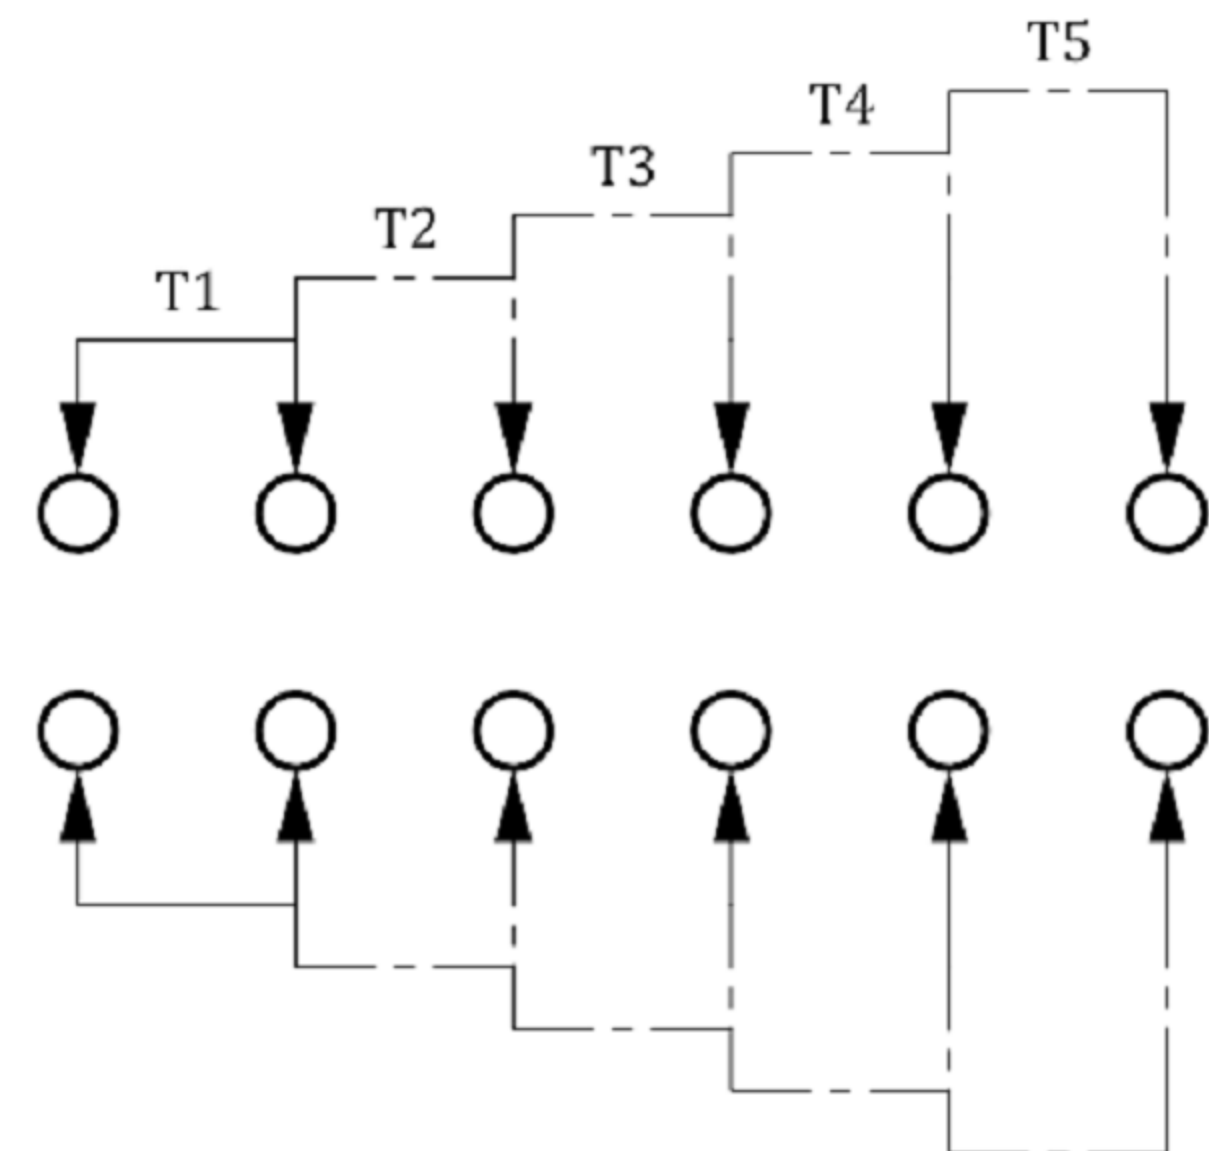
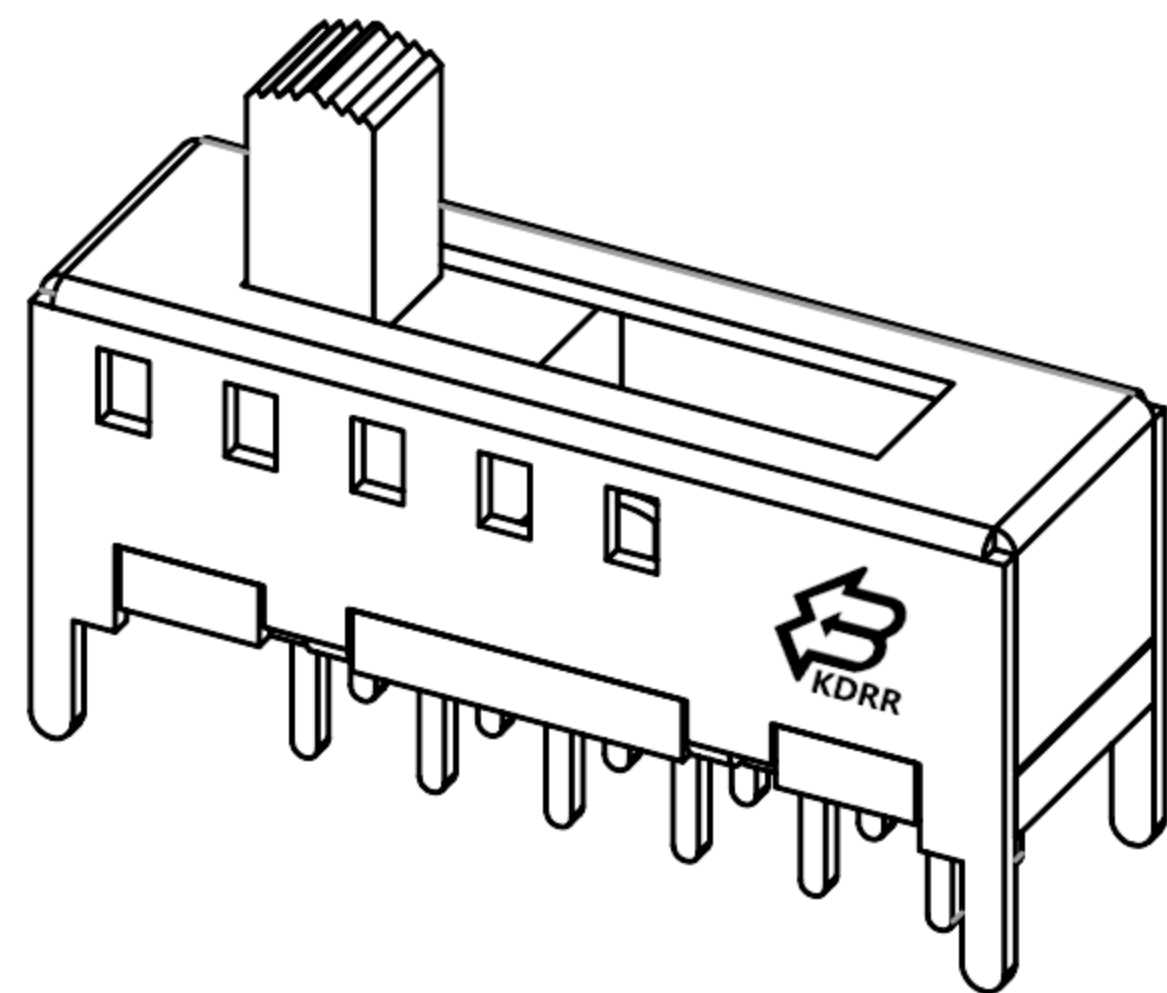
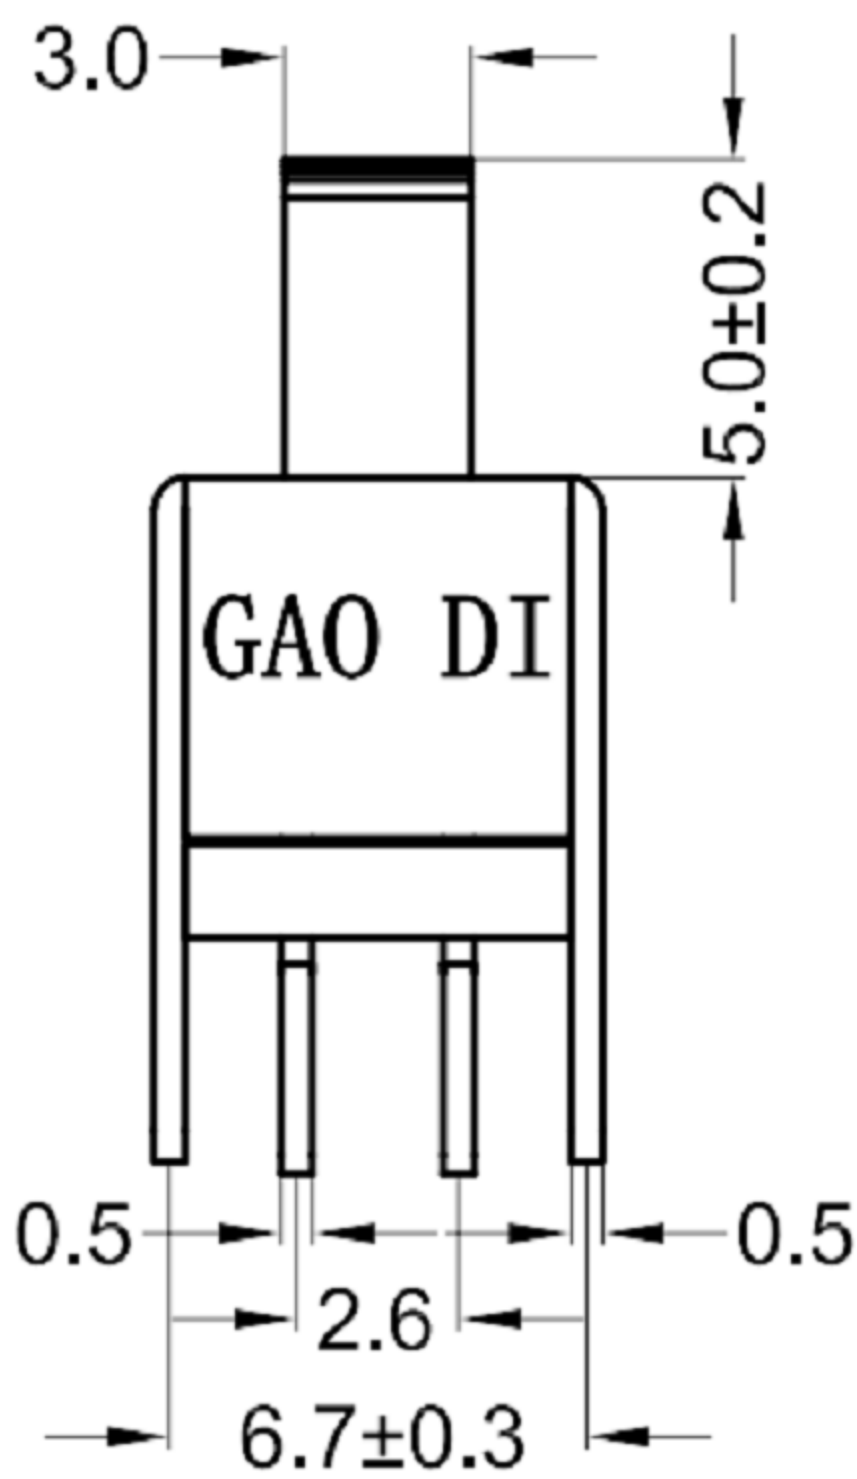
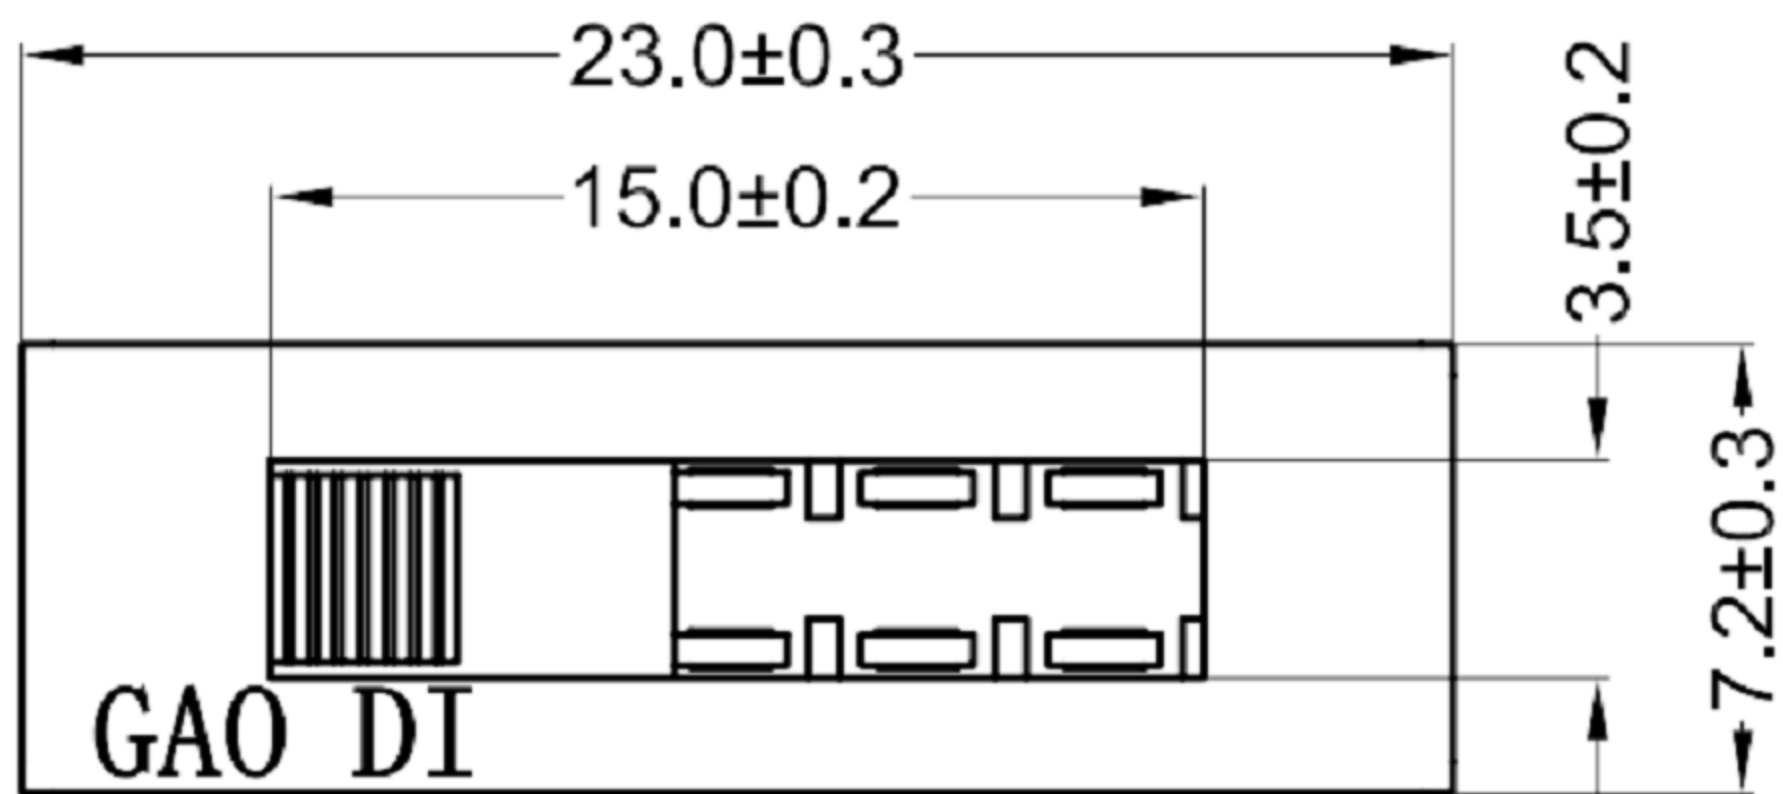


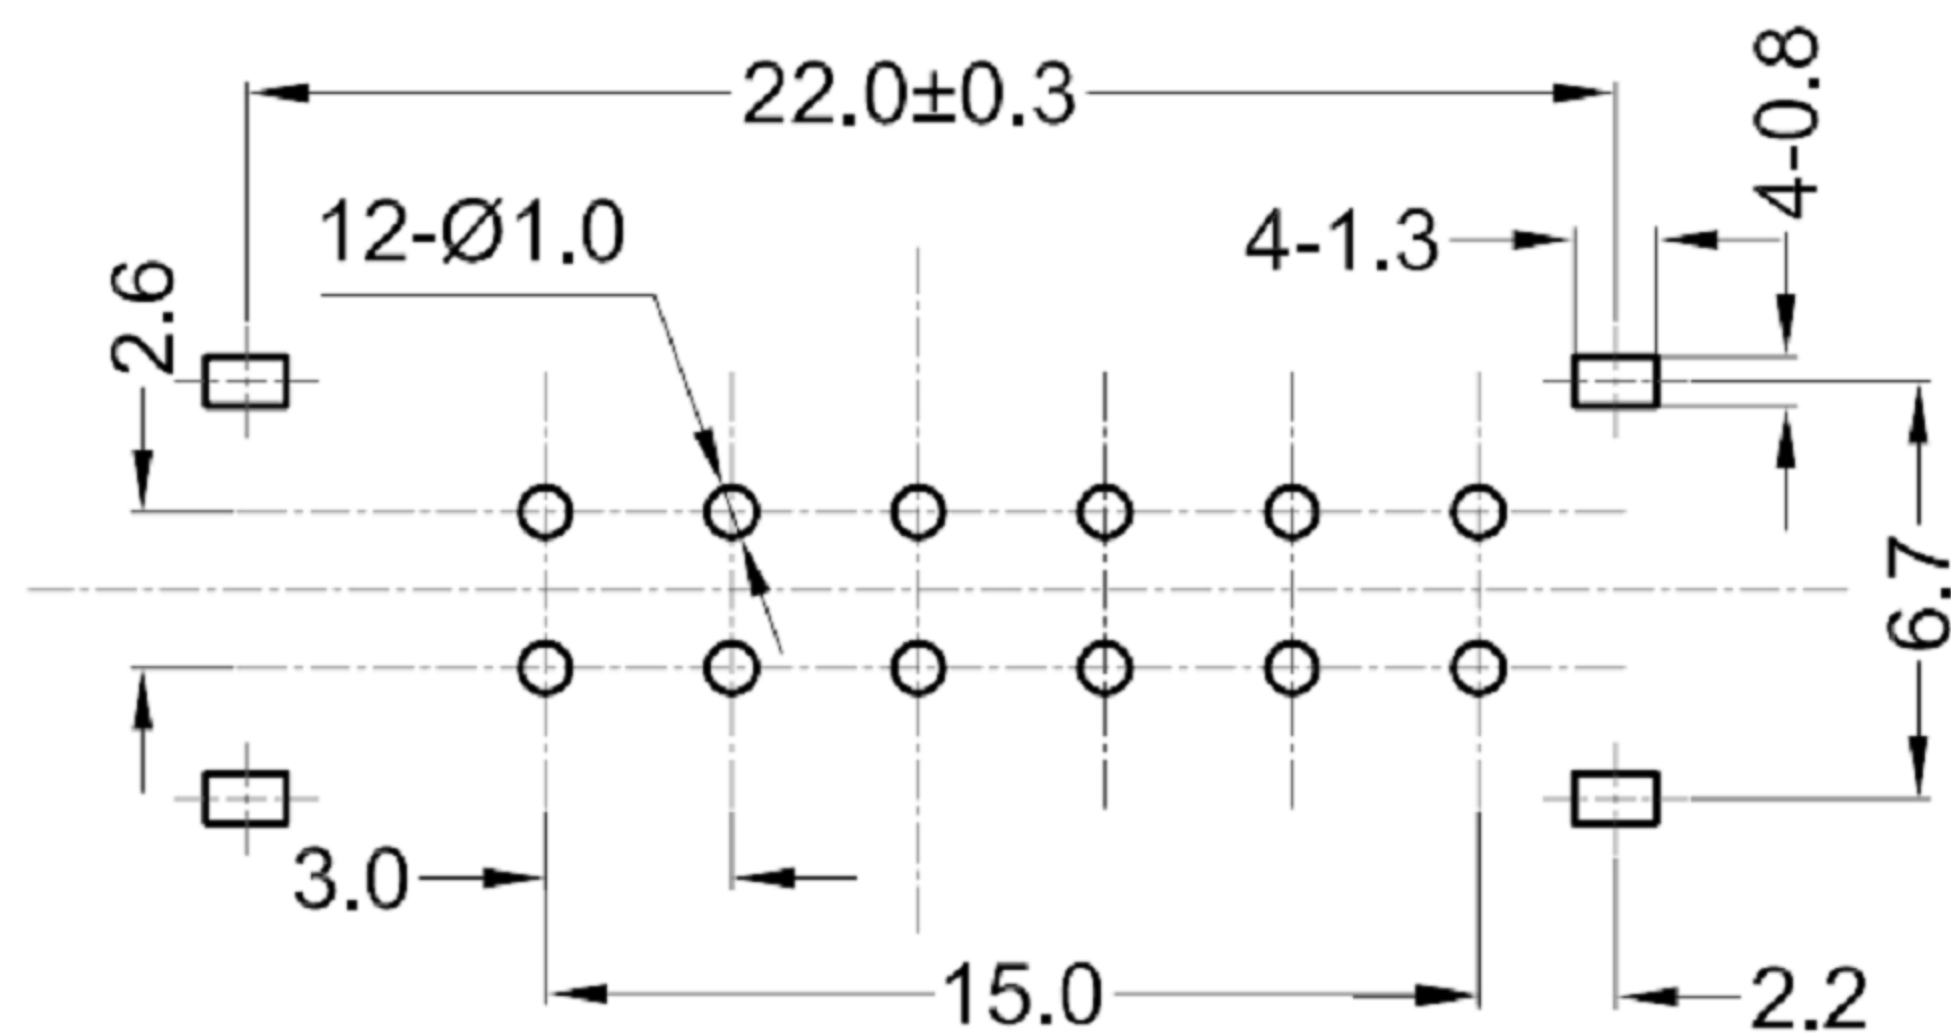

SCHEMATIC(SHORTING)

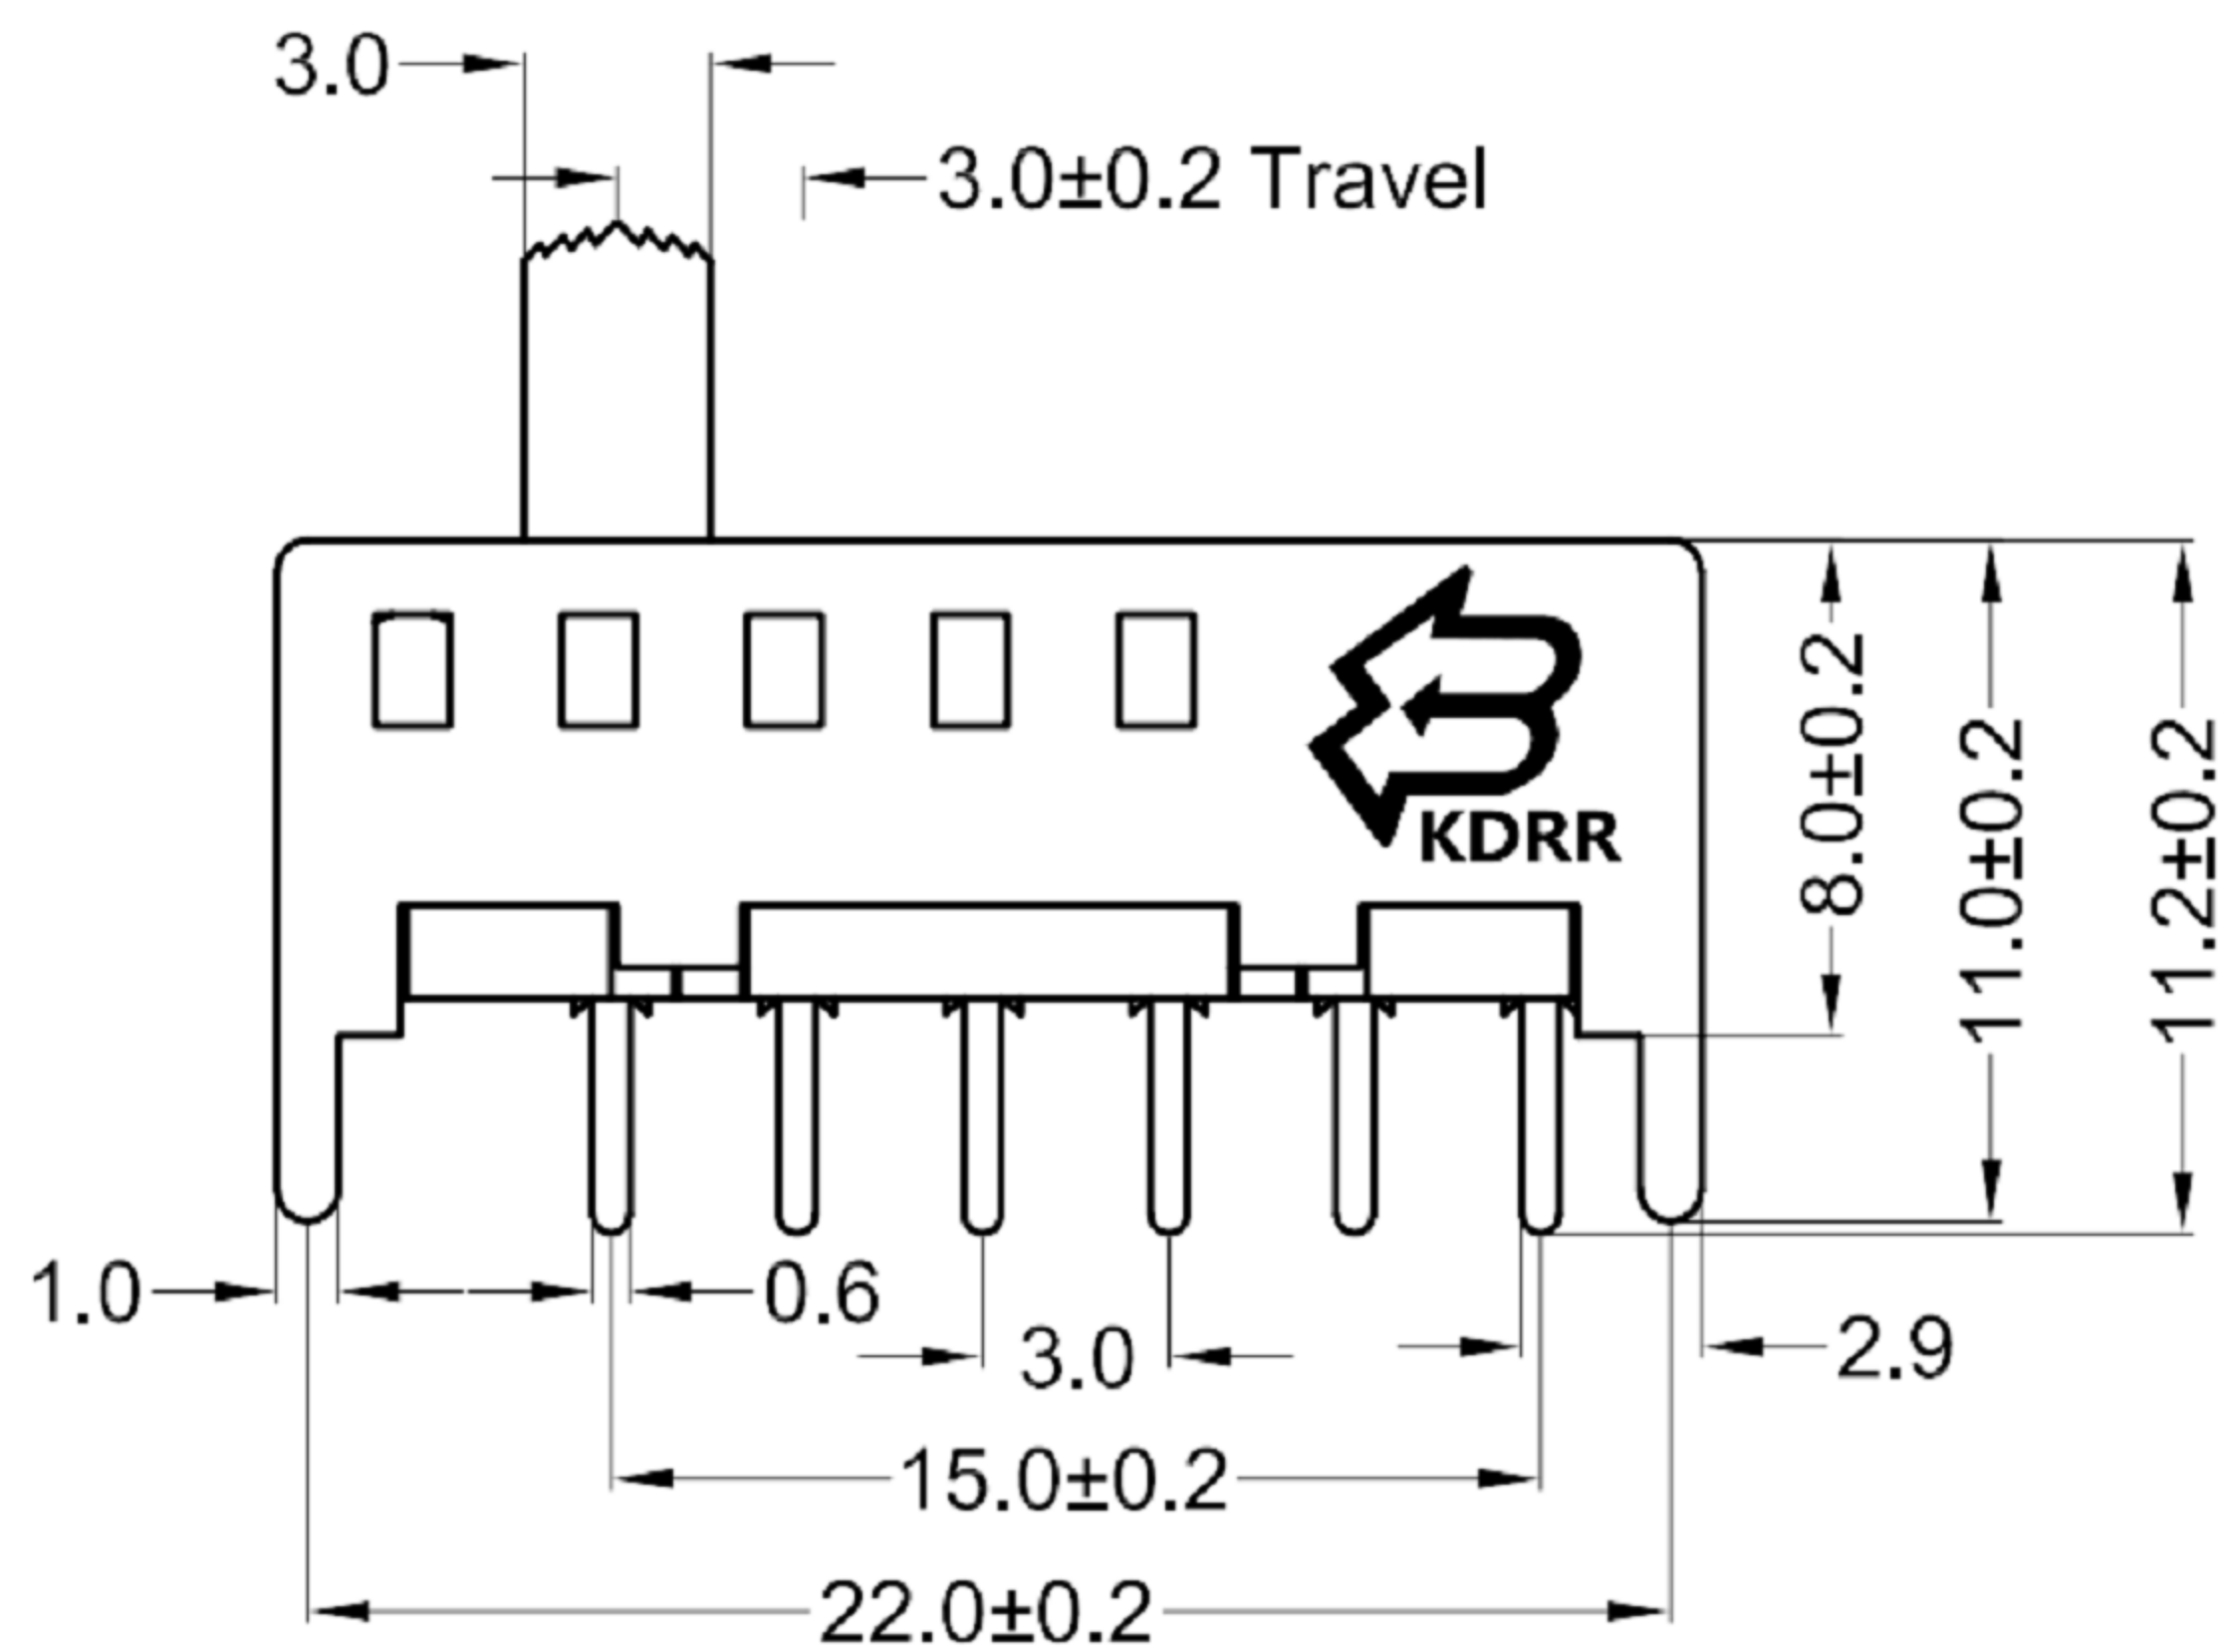

P.C.B LAYOUT

- 1. 额定负荷: 1A 250V 3A 125V AC
- 2. 接触阻抗: ≤50mΩ
- 3. 绝缘阻抗: ≥100mΩ DC500V
- 4. 耐焊温度: 250±5°5s
- 5. 使用寿命: 10,000 cycles
- 6. 使用温度: -25 °C to 80 °C
- 7. 使用湿度: ≤85% RH
- 8. 操作力 : 450gf 可
- 9. 手柄长度:2mm-10mm 可定制


6	CONTACT CLIP	BRASS STRIP	2	Ag PLATED
5	SPRING	STEEL WIRE	2	NATURAL
4	TERMINAL	BRASS STRIP	8	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	PA66	1	BLACK
NO.	NAME	MATERIALS	Q'TY	REMARK

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH SERIES
Ming Ming Zou	07/23/13	FINISH		MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	GD-SS-H25-2511
Ning Ning Su	07/23/13	SHEET NO.	1 of 1	PART NO.	
APPROVED BY:	DATE				
Jia Xiang	07/23/13				
					SIZE A4
					VER R2