



SUA-110E9x-x-S235

Shell Material :

Blank : Phosphor Bronze

I : SPCC

Color :

White : W

Black : B

SPECIFICATIONS

Electrical:





- 1.Voltage Current Rating: 1.5 AMP, 30VAC
- 2.Contact Resistance: 30 mΩ Max
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Operating Temperature: -35°C ~ 85°C
- 6.Mating Force: 3.57 Kg Max
- 7.Umating Force: 1.02 Kg Min

Material:

- 1.Housing: PBT , UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

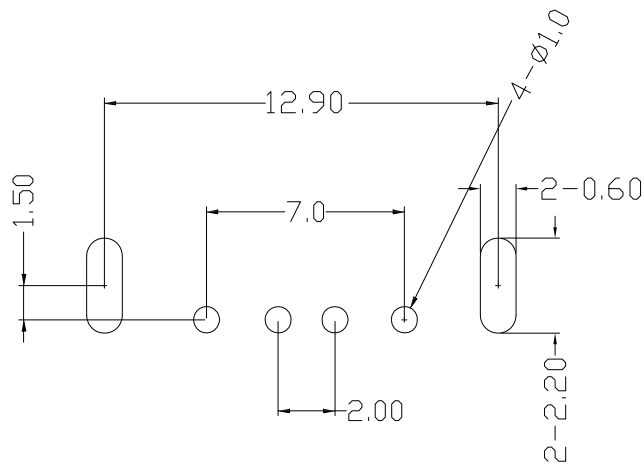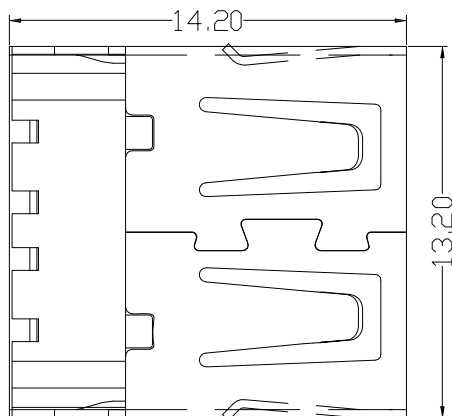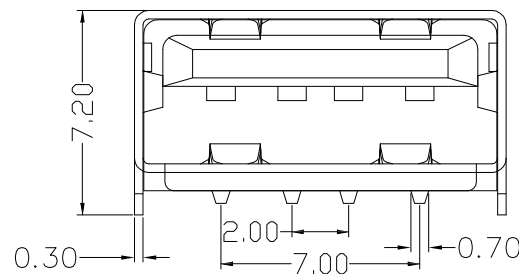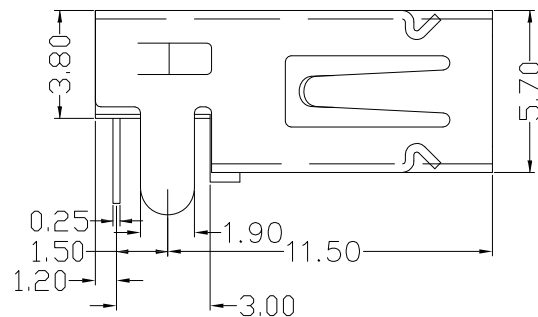

RECOMMEND P. C. B LAYOUT COMPONENT

6	更新尺寸	Jack	080715	 東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD	DRAWN BY: Jack Lu		DATE: 08/07/15	MAT'L		TITLE	CONNECTOR	
5	更新pcb layout 外殼孔	Jack	072215		CHECKED BY: Jacky Chen		DATE: 08/07/15	FINISH		MODLE	USB A/F 沉板H: 3.8mm 無捲邊	
4	更新為AO版	Jack	031815		APPROVED BY: Tony Kao		DATE: 08/07/15	SCALE	1 : 1	DWG NO.	SUA-110E9x-x-S235	SIZE A4
3	新增2.90和11.20兩個尺寸	Jack	121614					SHEET NO.	1 of 1	PART NO.	SUA-110E9x-x-S235	VER A2
2	更新材質及SPEC	Jack	053014									
1	更新尺寸	Jack	050514									
ITEM NO.	DESCRIPTION	DRAWN	DATE									