

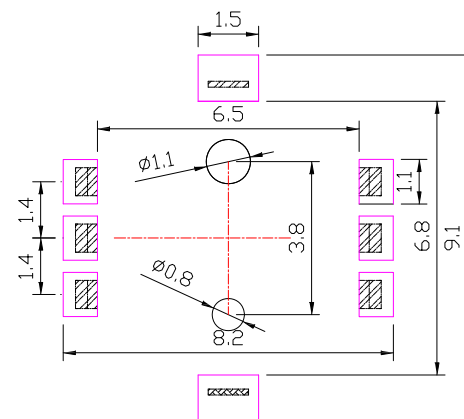
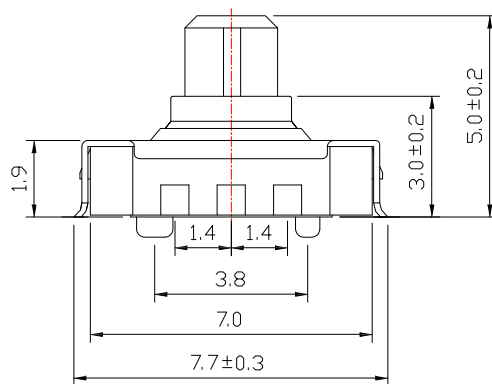
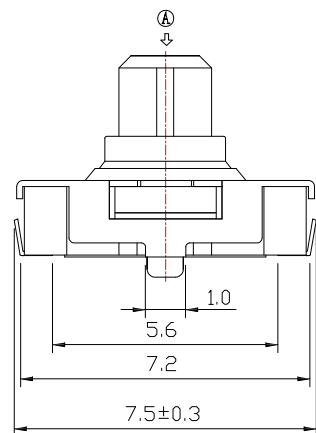


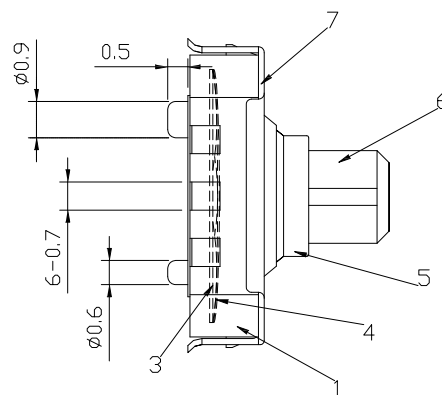

P.C.B LAND PATTERN

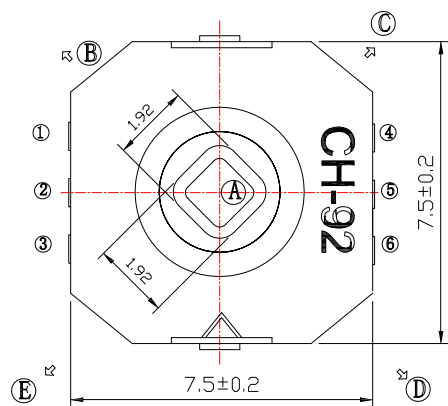

CIRCUIT DIAGRAM						
Ⓑ	①	②				
Ⓔ		②	③			
Ⓒ		②		④		
Ⓐ		②			⑤	
Ⓓ		②				⑥

(CIRCUIT DIAGRAM)

SPECIFICATIONS

Rating	50mA , 12V DC
Insulation Resistance	100M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Life	30,000 cycles

G	COVER	1	SUS	Ag plated
F	KNOB	1	PPA	Black
E	PLUM KNOB	1	PA6T	Black
D	TAPE	1	PI FILM	Yellow
C	CONTACT	2	SUS	Ag plated
B	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
A	BASE	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

8	更新尺寸	Jack	110222
7	更新圖面	Jack	081922
6	更新圖面	Jack	062122
5	更新圖面	Jack	122921
4	更新材質	Jack	072021
3	更新PCB LAYOUT端子編號	Jack	082319
2	更新PCB LAYOUT尺寸	Jack	091117
1	更新材質	Jack	073013
ITEM NO.	DESCRIPTION	DRAWN	DATE

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

	Up to 5	± 0.2
TOLERANCE UNLESS	Above 5 ~ 15	± 0.3
OTHERWISE STATED :	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/02/22

CHECKED BY:	DATE
Jacky Chen	11/02/22

APPROVED BY:	DATE
Tony Kao	11/02/22

DATE
11/02/22

DATE
11/02/22

DATE
11/02/22

	MAT'L
--	-------

	FINISH
2	SCALE

	SCALE
2	SHEET NO

1 of 1

TITLE

	MODLE

DWG NO.
PART NO.

SWITCH

Multi Functi

K03-S246
K03-S246

	SIZE
--	------

	A4
	VER
	D8