



Model No.	X (mm)
Blank	2.0
A	4.0

Black : B



White : W



CIRCUIT DIAGRAM

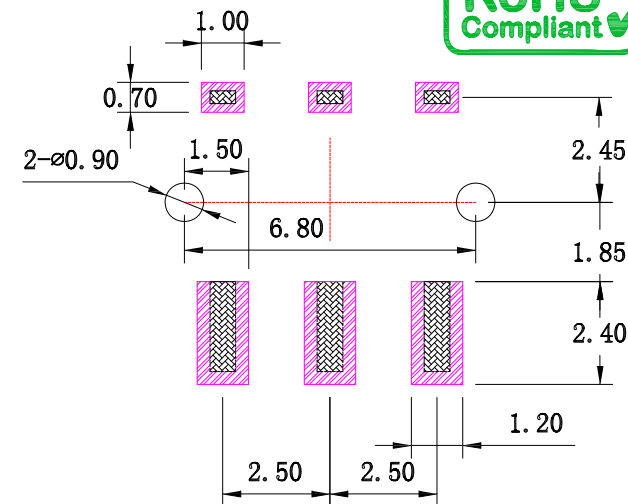

P.C.B LAND PATTERN

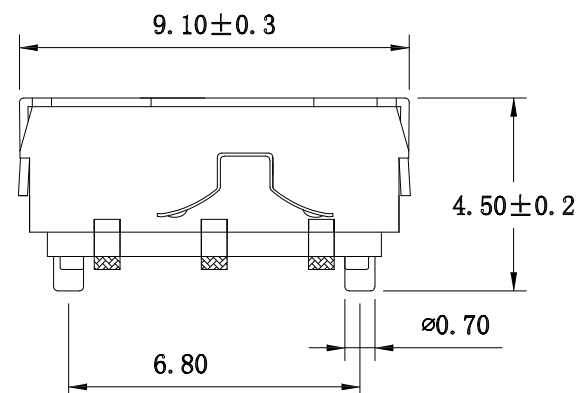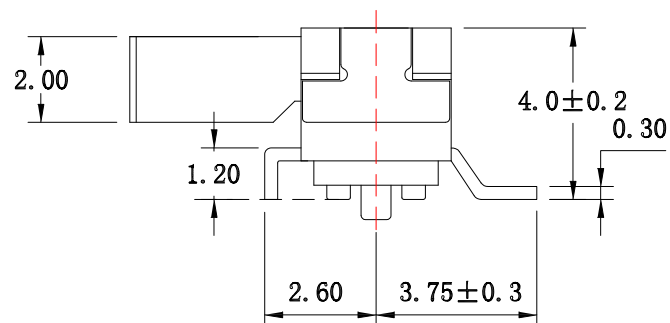

SPECIFICATIONS

Rating	100mA, 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1m
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

3	MAT'L		TITLE	SWITCH	
	FINISH		MODLE	SMT SLIDE SWICTH 撥柄鋸齒狀	
3	SCALE	1 : 1	DWG NO.	SS-B80x1-x-S246	SIZE A4
3	SHEET NO.	1 of 1	PART NO.	SS-B80x1-x-S246	VER R6

6	更新圖面	Jack	060923
5	更新材質	Jack	011623
4	新增椅長選項	Jack	112522
3	更新圖面	Jack	092319
2	更新圖面	Jack	122618
1	新增尺寸	Jack	112217
ITEM NO.	DESCRIPTION	DRAWN	DATE



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



- UNITS

MM

DRAWN BY:	DATE
Jack Lu	06/09/23

CHECKED BY:	DATE
Jacky Chen	06/09/23

APPROVED BY:	DATE
Tony Kao	06/09/23