


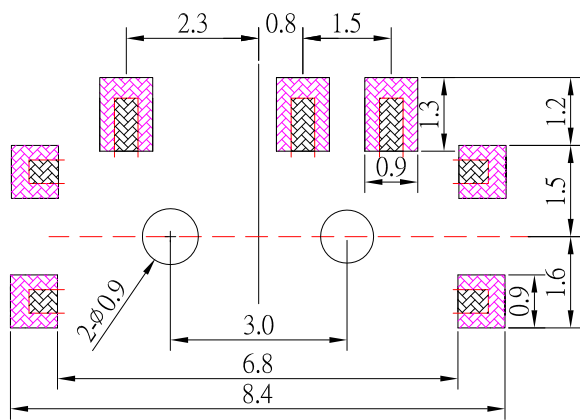



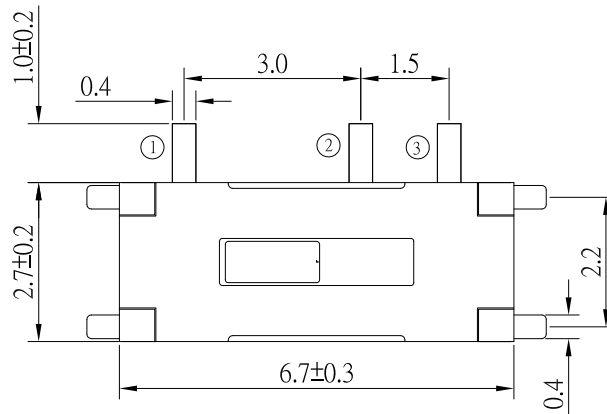

P.C.B LAND PATTERN

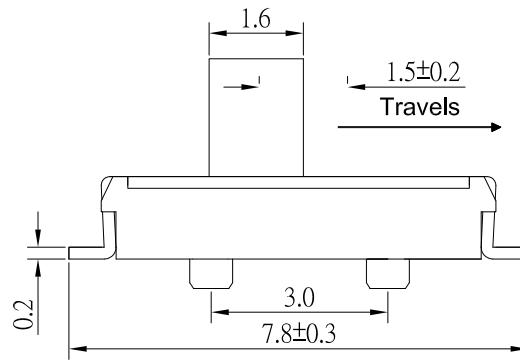

CIRCUIT DIAGRAM

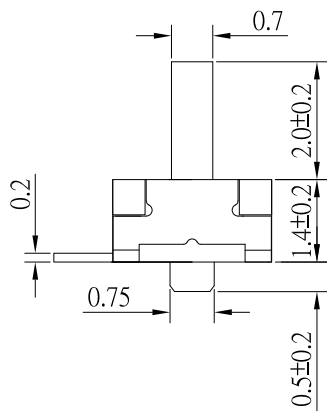

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	100M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	160 $\pm$ 50gf
Operating Life	10,000 cycles

F	CONTACT	1	PHOSPHOR BRONZE	Ag plated
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	SUS	
C	COVER	1	BRASS	Ag plated
B	CASE	1	LCP(Black)	
A	SLIDER	1	PPA(White)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

8	更新材質	Jack	012921
7	更新圖面	Jack	040919
6	更新材質	Jack	101217
5	更新材質	Jack	090817
4	更新Rating	Jack	080117
3	更新料號	Jack	091916
2	更新料號	Jack	070413
1	更新Rating	Jack	062813
ITEM NO.	DESCRIPTION	DRAWN	DATE



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
01/29/21
DATE
01/29/21
DATE
01/29/21

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
SMT SLIDE SWICTH 平柄 柄寬:1.6*2.0
SS-B95A-W-S246
SS-B95A-W-S246

SIZE
A4
VER
R8