




P.C.B LAND PATTERN

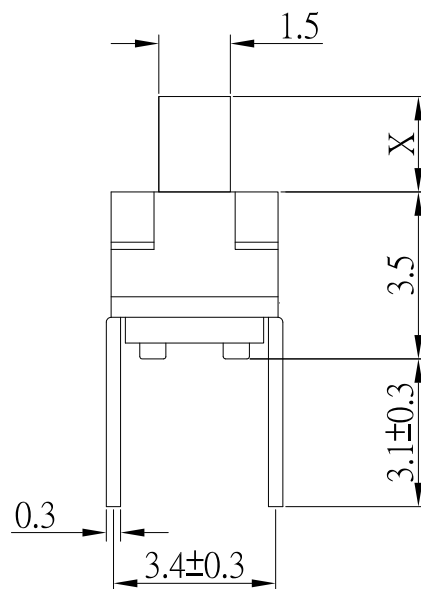

CIRCUIT DIAGRAM

NO	MODEL	KNOB(X)
1	SS-D35	2.0 mm
2	SS-D35B	4.0 mm
3	SS-D35D	5.0 mm

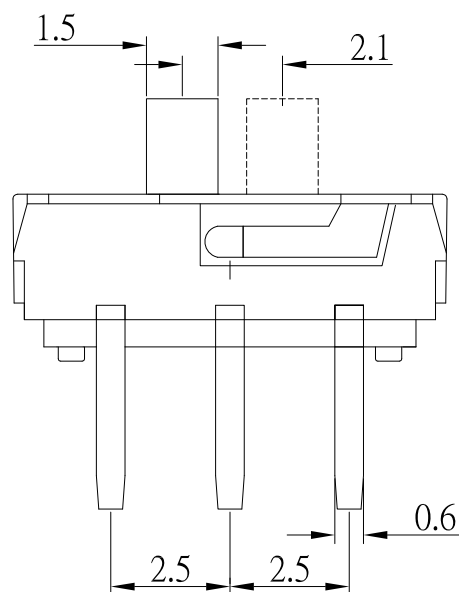

SPECIFICATIONS

Rating	10mA 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100m Ω Max.
Operating Force	160 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA	Black
A	SLIDER	1	PA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DATE 11/19/21	MAT'L		TITLE	SWITCH
DATE 11/19/21	FINISH		MODLE	SLIDE SWICTH
DATE	SCALE	1 : 1	DWG NO.	SS-D35x-B-S246
11/19/21	SHEET NO.	1 of 1	PART NO.	SS-D35x-B-S246



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/19/2011
CHECKED BY:	DATE
Jacky Chen	11/19/2011
APPROVED BY:	DATE
Tony Kao	11/19/2011