

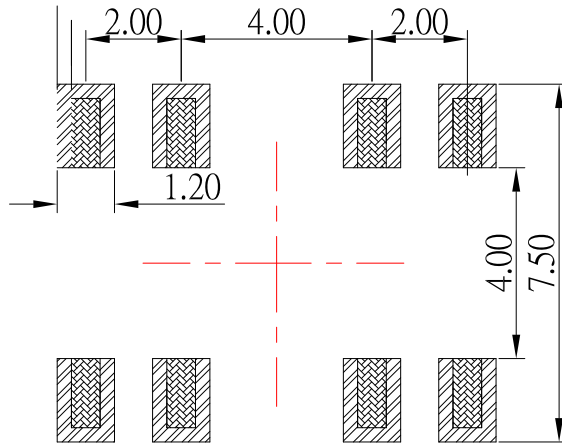


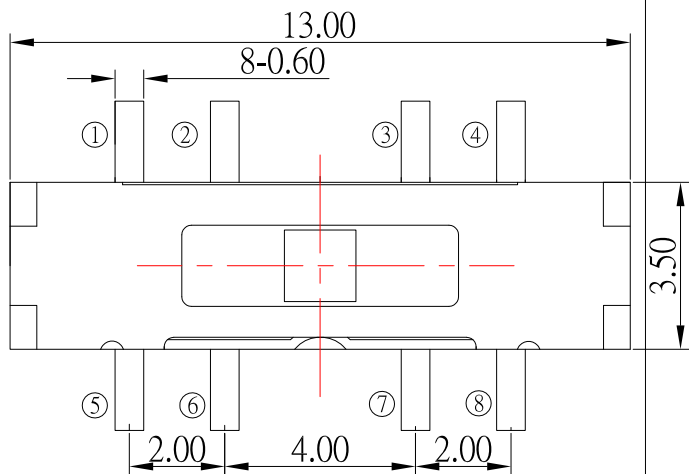

CIRCUIT DIAGRAM

P.C.B LAND PATTERN



SS-F36Sx-x-S246

MODEL NO.	KNOB(X)
SS-F36S	2.0 mm
SS-F36SA	4.0 mm

SLIDER COLOR :
Black : B
White : Blank

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	230 $\pm$ 70gf
Operating Life	10,000 cycles

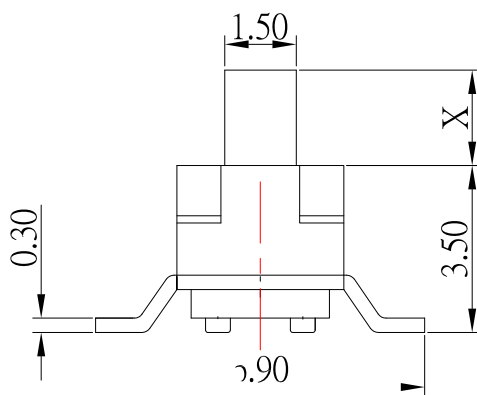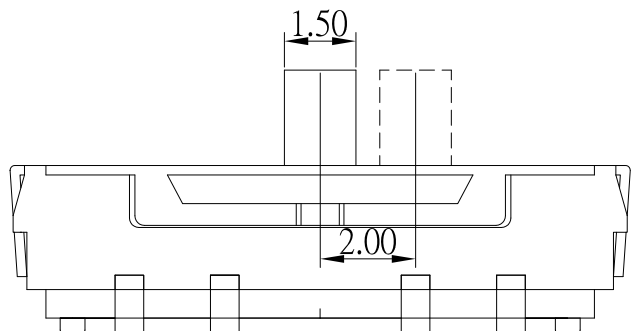

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	COPPER	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	LCP	Black
A	SLIDER	1	PPA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 $\pm$ 0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 $\pm$ 0.3			
	Above 15 ~ 30 $\pm$ 0.4			
	Above 30 ~ 50 $\pm$ 0.5			
	Angle $\pm$ 0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/23/15			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	06/23/15			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-F36Sx-x-S246
Tony Kao	06/23/15	1 : 1		
		SHEET NO.	PART NO.	SS-F36Sx-x-S246
				SIZE A4
				VER R4