
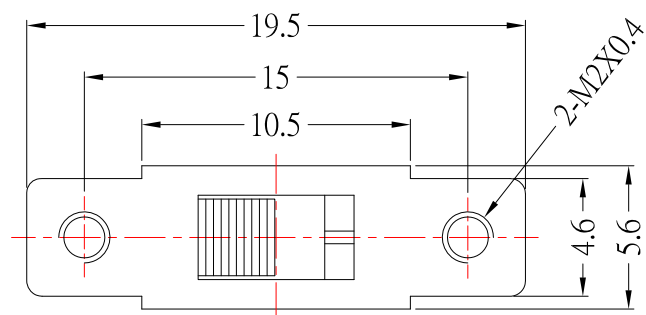
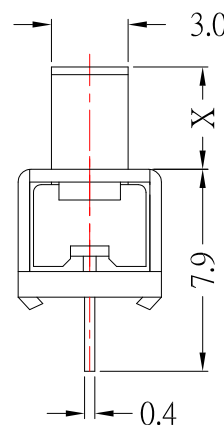


P.C.B MOUNTING PATTERN

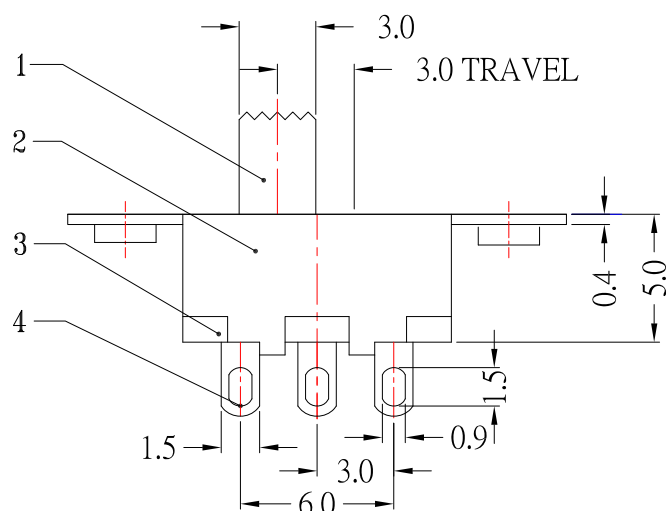

Model No.	X(mm)
SS-12F16-G2	2mm
SS-12F16-G3	3mm
SS-12F16-G4	4mm
SS-12F16-G5	5mm
SS-12F16-G6	6mm
SS-12F16-G7	7mm
SS-12F16-G8	8mm
SS-12F16-G9	9mm

Rating	DC 50V 0.3A
Circuit	1P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	180gf ±80gf
Operating Life (cycle)	10,000 Min.

6	SPRING	1	SUS	Natural		
5	CONTACT	1	BRASS	Ag-Plated		
4	TERMINAL	3	BRASS	Ag-Plated		
3	BASE	1	PHENOLIC RESIN	Natural		
2	FRAME	1	SPCC	Ni-Plated		
1	KNOB	1	POM	Black		
NO.	DESCRIPTION	QTY	MATERIAL	REMARK		
DRAWN BY: DATE		MAT'L		TITLE	SWITCH	
Jack Lu 12/20/17				MODLE	SLIDE SWITCH	
CHECKED BY: DATE		FINISH		DWG NO.	SS-12F16-Gx-S191	SIZE A4
Jacky Chen 12/20/17						
APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	SS-12F16-Gx-S191	VER R3
Tony Kao 12/20/17						

4	更新圖面	Jack	122017
3	新增SPEC	Jack	102215
2	更新材質	Jack	050615
1	更新為A0版	Jack	040715
ITEM NO.	DESCRIPTION	DRAWN	DATE



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM