

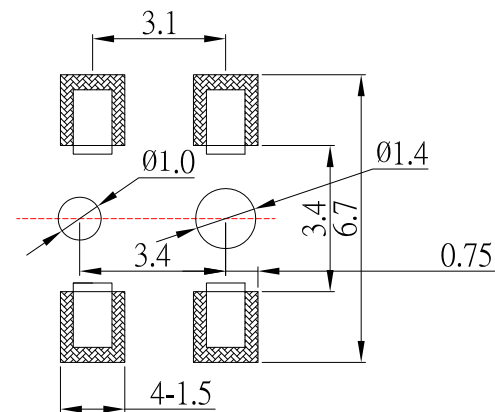
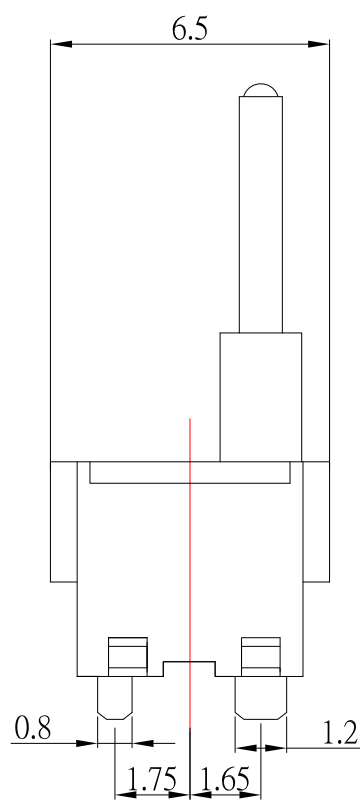
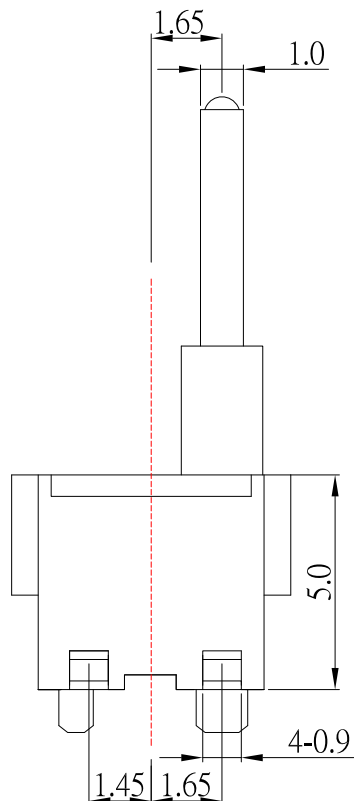


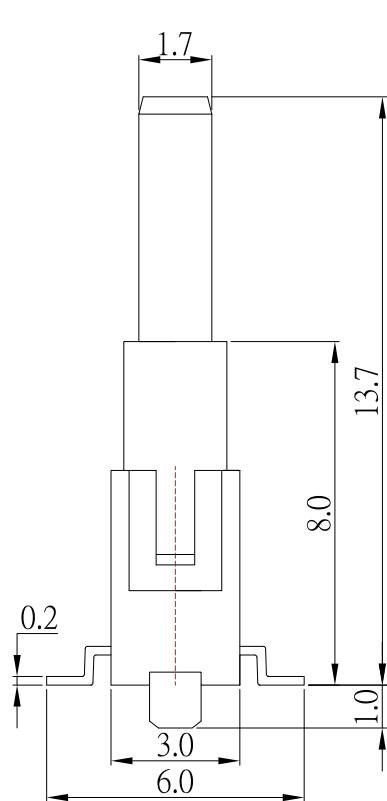

P.C.B LAYOUT



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 0.1A
Contact Resistance	100m Ω Max
Insulation Resistance	50M Ω Min
Operating Force	40 $\pm$ 20gf
Life	100,000 cycles

E	THERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PA46	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	09/26/13	FINISH	MODLE	DETECTOR SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	DS-A30L1-S246
Jacky Chen	09/26/13	1 : 1	PART NO.	DS-A30L1-S246
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	09/26/13			



TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 $\pm$ 0.2 Above 5 ~ 15 $\pm$ 0.3 Above 15 ~ 30 $\pm$ 0.4 Above 30 ~ 50 $\pm$ 0.5 Angle $\pm$ 0.3°	3RD. ANGEL'S	UNITS	MM
------------------------------------	---	--------------	-------	----

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------