

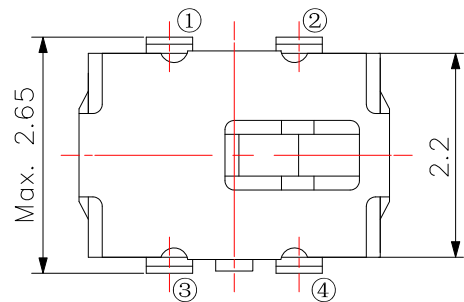
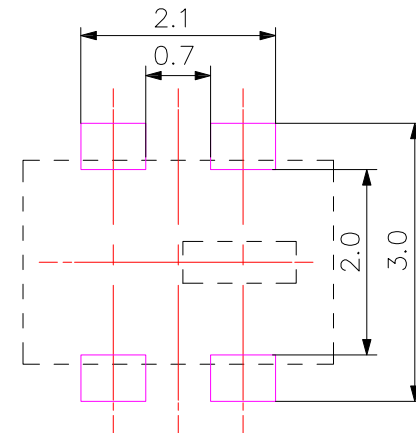


SCHEMATIC



MOUNTING HOLES

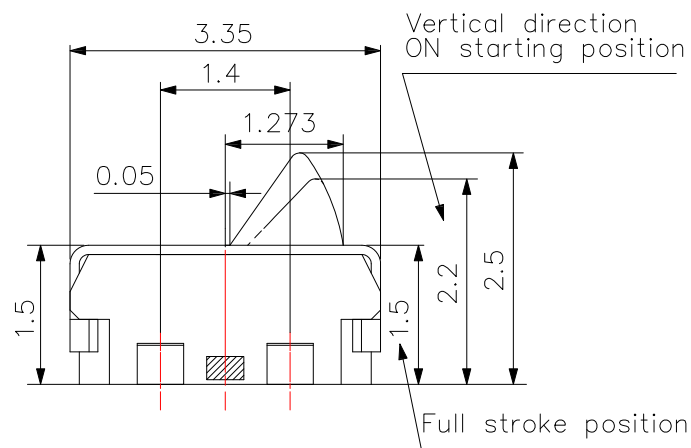

SPECIFICATION

1. RATING : DC3V, 5uA ; DC5V, 10mA
2. CONTACT RESISTANCE : $\leq 500\text{m}\Omega$;
3. INSULATION RESISTANCE : $\geq 100\text{M}\Omega$;
4. OPERATING TEMPERATURE : $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$;
5. HUMIDITY APPLICATION : $< 85\% \text{ RH}$;
6. OPERATING FORCE : 250mN Max ;
7. LIFE : 50,000 CYCLES ;