
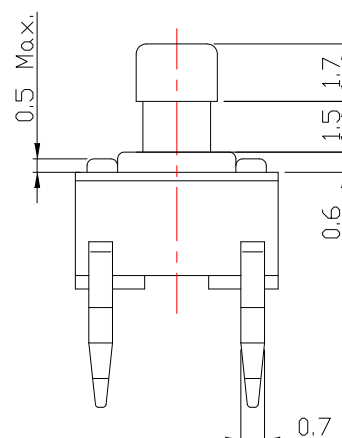
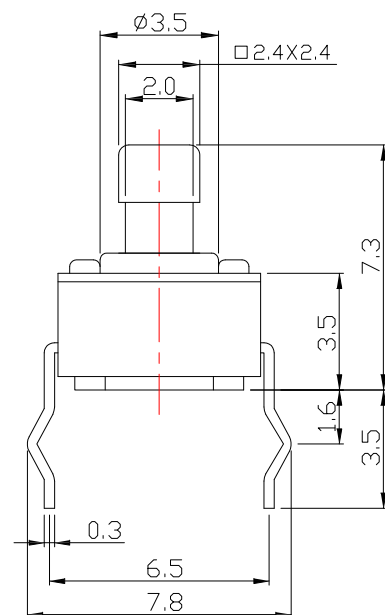
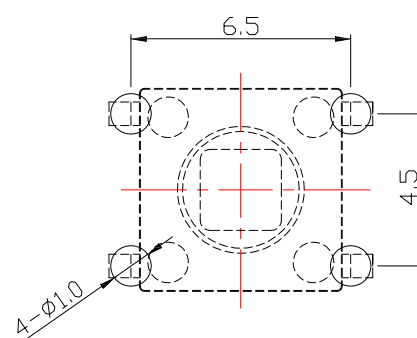


CIRCUIT DIAGRAM

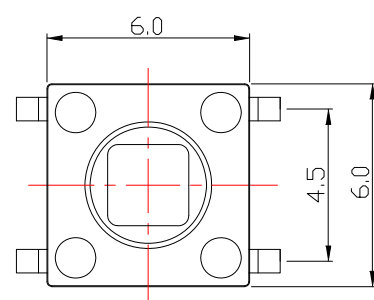

P.C.B LAYOUT
MOUNTING PATTERN

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycle)	100,000 cycles		



TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SIZE
Jack Lu	01/12/15		SWITCH	
CHECKED BY:	DATE	FINISH	MODLE	
Jacky Chen	01/12/15		TACT SWITCH	
APPROVED BY:	DATE	SCALE	DWG NO.	VER
Tony Kao	01/12/15	1 : 1	TS-A02T-x-S126	R
SHEET NO.	1 of 1	PART NO.	TS-A02T-x-S126	