

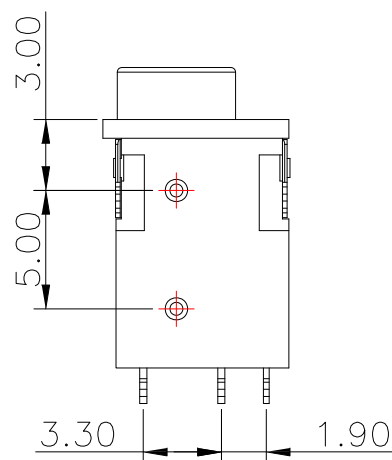
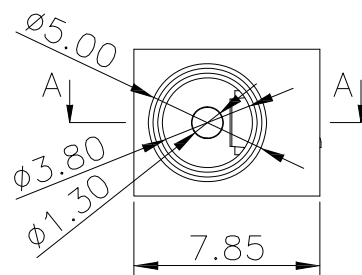
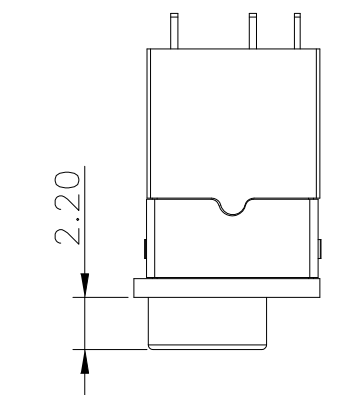
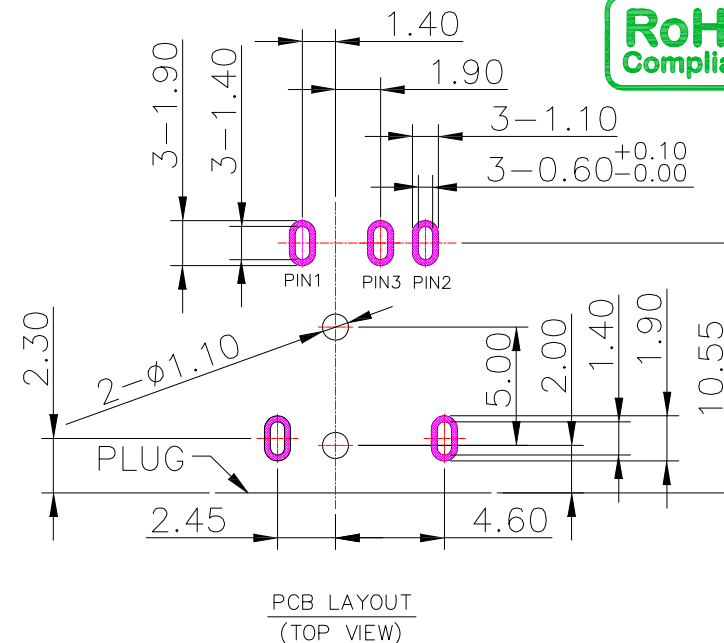
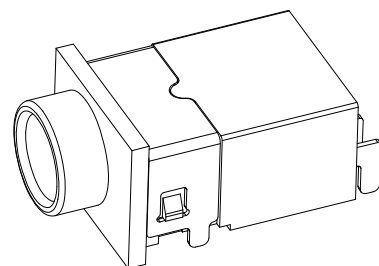


A-A

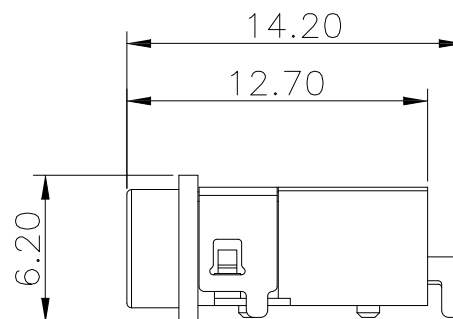

PCB LAYOUT
(TOP VIEW)



SCHEMATIC

SPECIFICATION

- 1.Rating : DC 30V, 3.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Dielectric Withstanding Voltage : 500V AC

※MATERIAL

HOUSING : TEMPERATURE PLASTIC
COVER : TEMPERATURE PLASTIC
CONTACT : COPPER ALLOY(Au Plated)



TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
01/19/18
DATE
01/19/18
DATE
01/19/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
DC JACK 防水型
DC-WP1001HS-1.3-S377
DC-WP1001HS-1.3-S377

SIZE
A4
VER
R1

ITEM NO.
DESCRIPTION
DRAWN
DATE

1
新增PCB LAYOUT尺寸
Jack
011918