

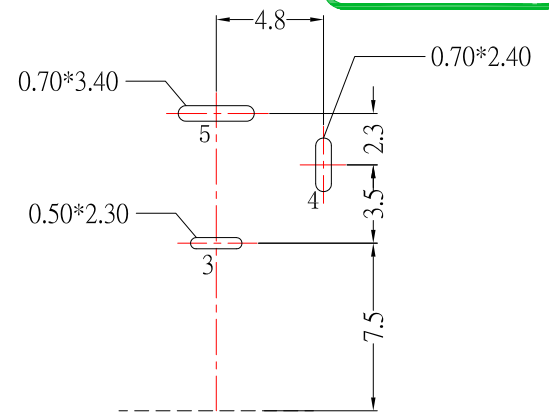
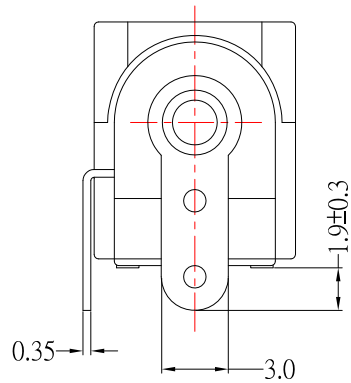
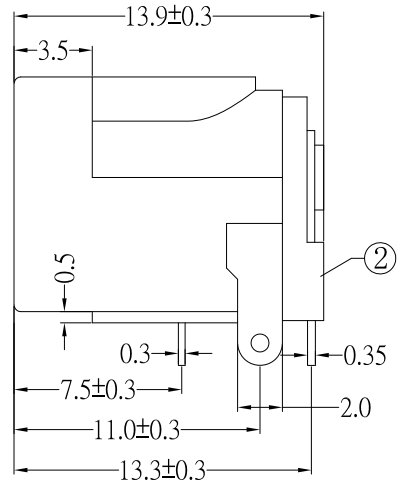
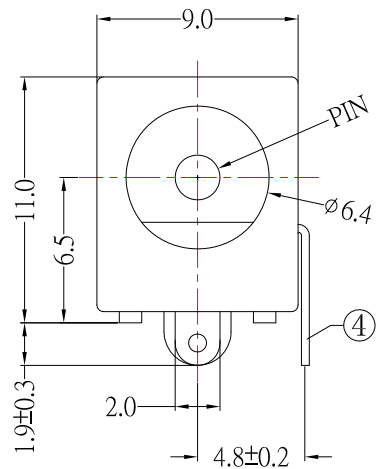
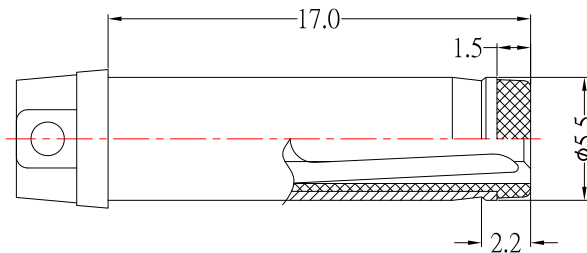


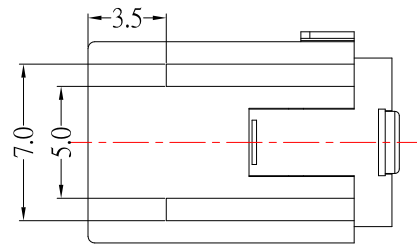

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

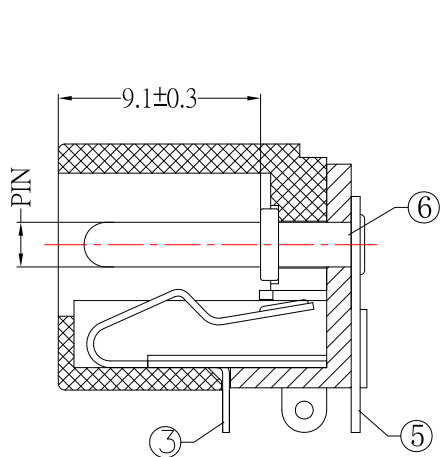

RECOMMENDED PLUG

MODEL NO.	DC-021HT-x-S124
SCHEMATIC	
CENTER PIN	φ2.0 mm φ2.5 mm

SPECIFICATION

- Rating : DC 30V , 3.5A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

⑥	PIN	1	Brass	Ni-Plating
⑤	FLAT FOOT	1	Brass	Ag-Plating
④	CURVE PIECE	1	Brass	Ag-Plating
③	SPRING PIECE	1	Phosphor Bronze	Ag-Plating
②	COVER	1	LCP	
①	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/01/21		MODLE	DC JACK
CHECKED BY:	DATE	FINISH	DWG NO.	DC-021HT-x-S124
Jacky Chen	10/01/21		PART NO.	DC-021HT-x-S124
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	10/01/21	SHEET NO.	1 of 1	
				SIZE A4
				VER R3

3	更新PCB LAYOUT	Jack	100121
2	新增底部樣式圖及尺寸	Jack	092721
1	更新尺寸及新增公差	Jack	092321
ITEM NO.	DESCRIPTION	DRAWN	DATE