

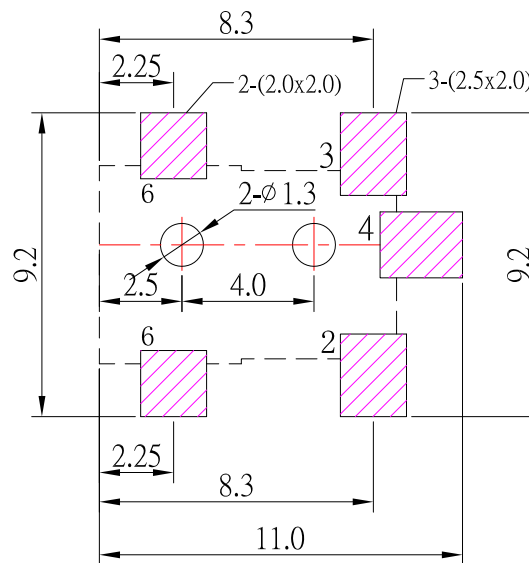
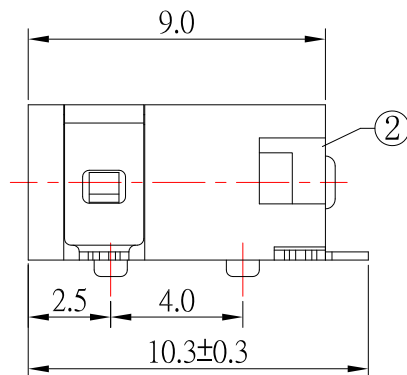
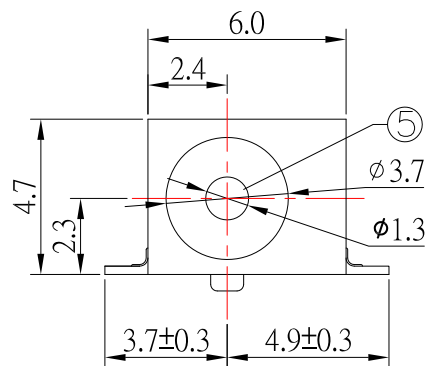





Model NO.	DC-073DS-1.3
SCHEMATIC	 3/5 (+) 4 2 (-)

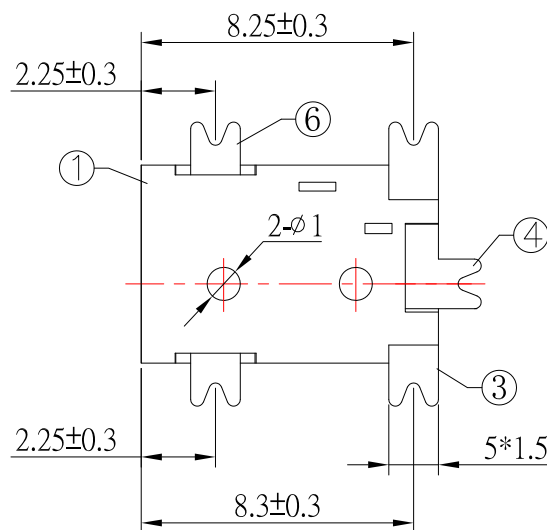

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 2.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

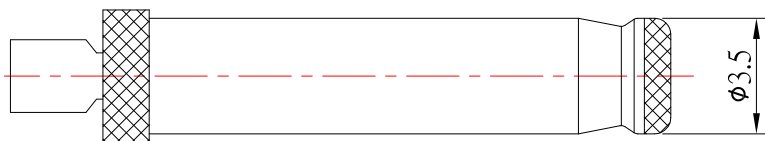

RECOMMENDED PLUG

6	CONTACT FOOT	1	BRASS	Ag-Plating
5	PIN	1	H59	Ni-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新圖面	Jack	081722
4	更新料號	Jack	080621
3	更新料號	Jack	101817
2	更新為AO版	Jack	042117
1	更新圖面	Jack	021617
ITEM NO.	DESCRIPTION	DRAWN	DATE

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/17/22			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	08/17/22			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-073DS-1.3-S124
Tony Kao	08/17/22	1 : 1		
		SHEET NO.	PART NO.	DC-073DS-1.3-S124
		1 of 1		
				SIZE A4
				VER R5