

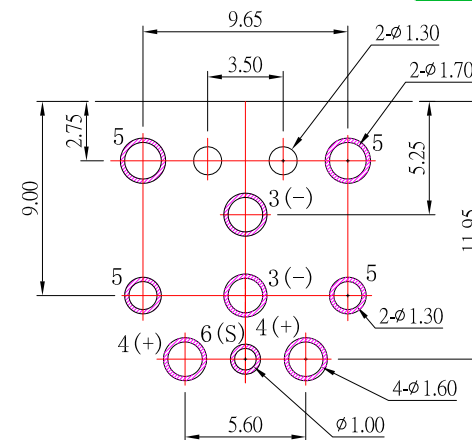
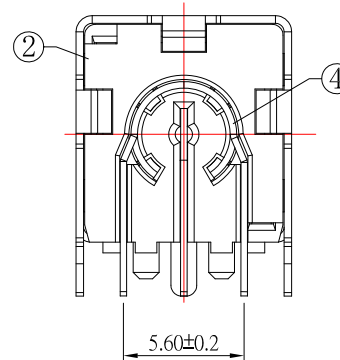
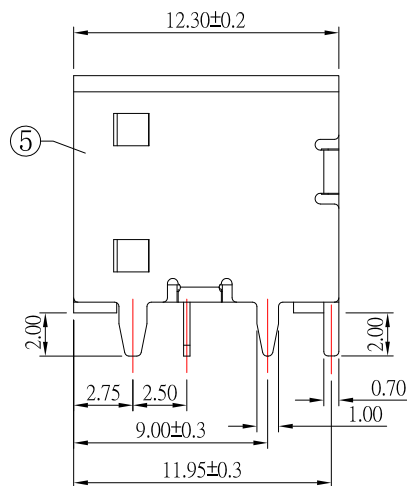
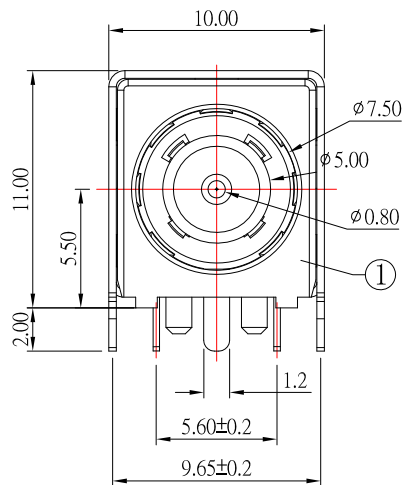
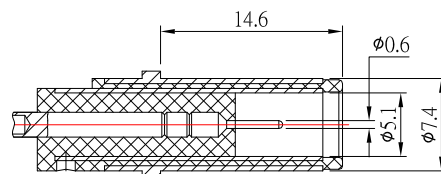




P.C.B LAYOUT TOP VIEW

SPECIFICATION

- Rating : DC 20V,10.0A
- Contact resistance : $\leq 30\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 150VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

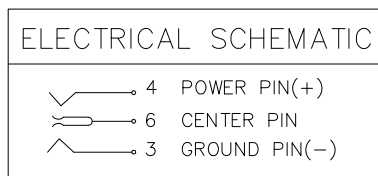

RECOMMENDED PLUG

⑥	PIN	1	PHOSPHOR BRONZE	Au-Plating
⑤	COAT	1	BRASS	Ni-Plating
④	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
②	COVER	1	LCP	
①	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/11/21		MODLE	DC JACK
CHECKED BY:	DATE	FINISH	DWG NO.	DC-093HS1-0.6-S124
Jacky Chen	11/11/21		PART NO.	DC-093HS1-0.6-S124
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	11/11/21	SHEET NO.	1 of 1	

3	更新材質	Jack	111121
2	新增插入深度尺寸	Jack	050721
1	更新料號	Jack	010721
ITEM NO.	DESCRIPTION	DRAWN	DATE