


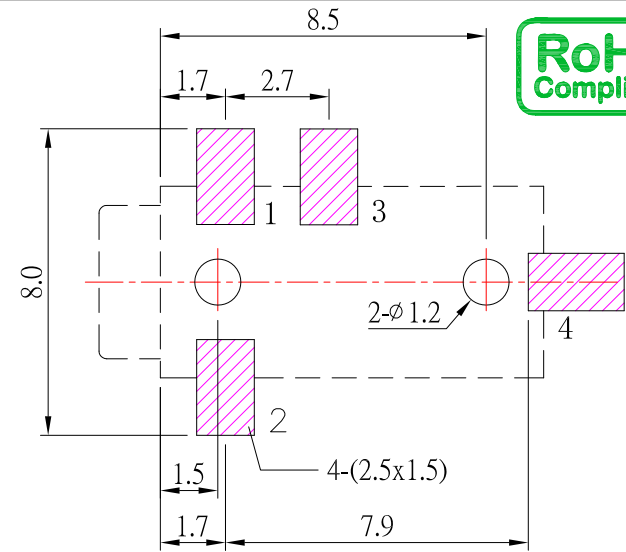
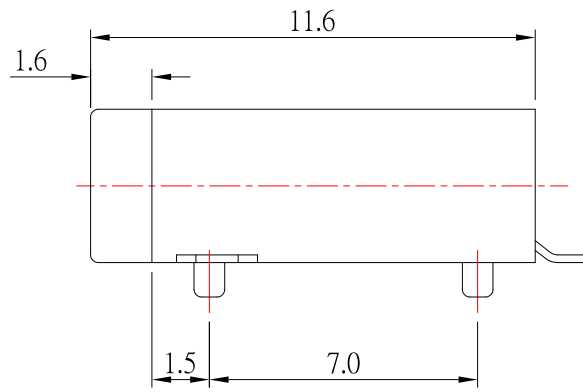


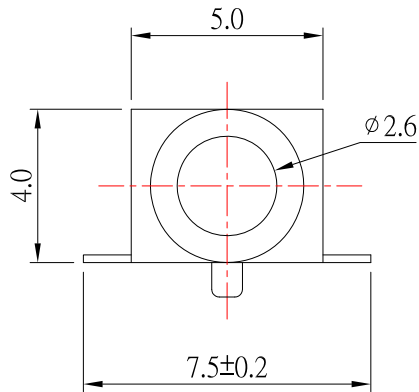

P.C.B LAYOUT
TOP VIEW

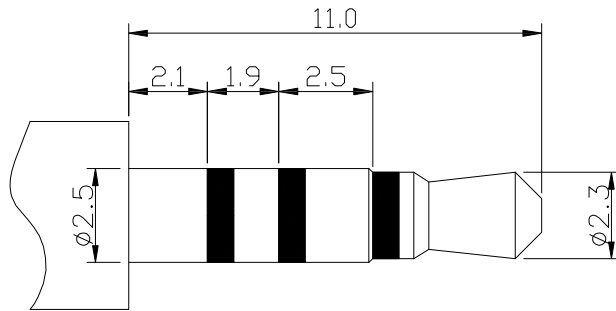


Ø2.50mm 4 POLE PLUG

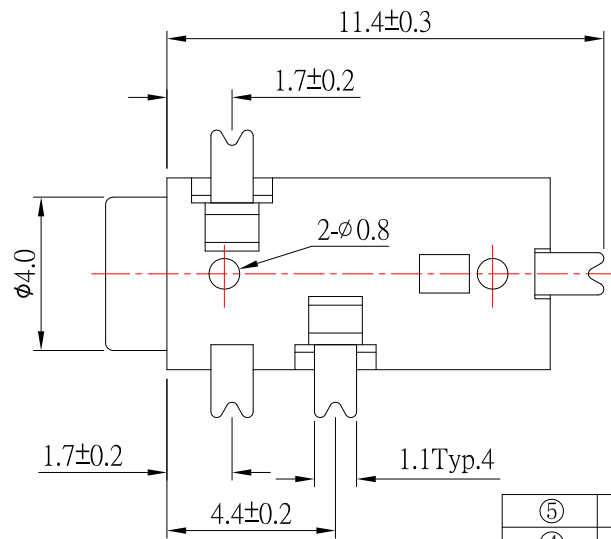

SCHEMATIC

PJ-2684-S124



SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

⑤	HOUSING	1	PA9T	
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/14/19			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/14/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-2684-S124
Tony Kao	11/14/19	1 : 1		
		SHEET NO.	1 of 1	PART NO. PJ-2684-S124
				SIZE A4
				VER R1

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

1	更新plug	Jack	111419
ITEM NO.	DESCRIPTION	DRAWN	DATE