
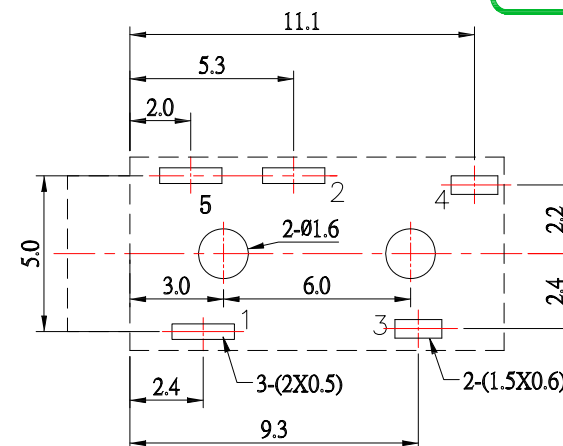
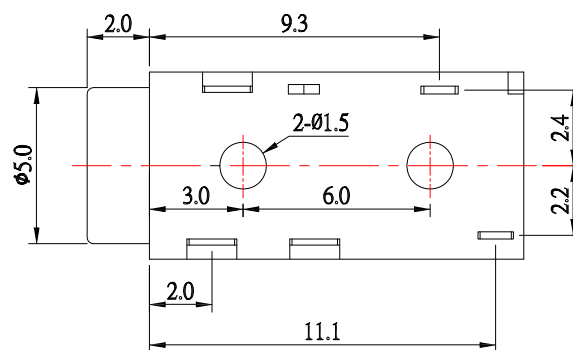
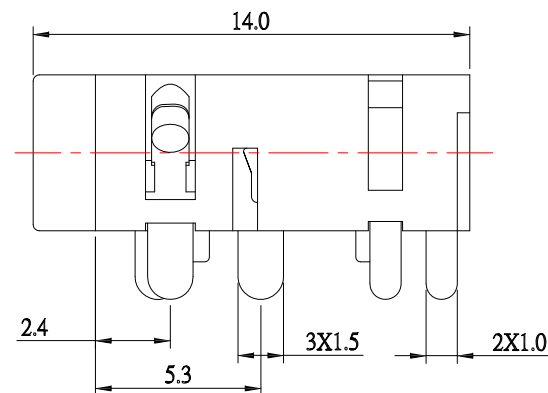


PJ-D3027D	PJ-D3027D-1	PJ-D3027D-2

PJ-D3027D	PJ-D3027D-1	PJ-D3027D-2

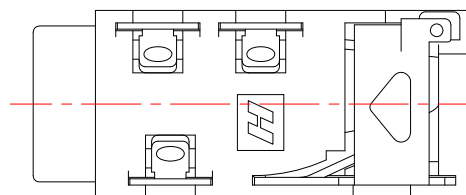

P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.



UNITS

MM

DRAWN BY:	DATE
Jack Lu	07/23/13
CHECKED BY:	DATE
Jacky Chen	07/23/13
APPROVED BY:	DATE
Tony Kao	07/23/13

DATE _____

07/23/13

DATE _____

07/23/13

DATE _____

MAT'L		TITLE	JACK	
FINISH		MODLE	PHONE JACK	
SCALE	1 : 1	DWG NO.	PJ-D3027D-S125	SIZE A4
SHEET NO.	1 of 1	PART NO.	PJ-D3027D-S125	VER R1

	SIZE
	A4
	VER
	R1