

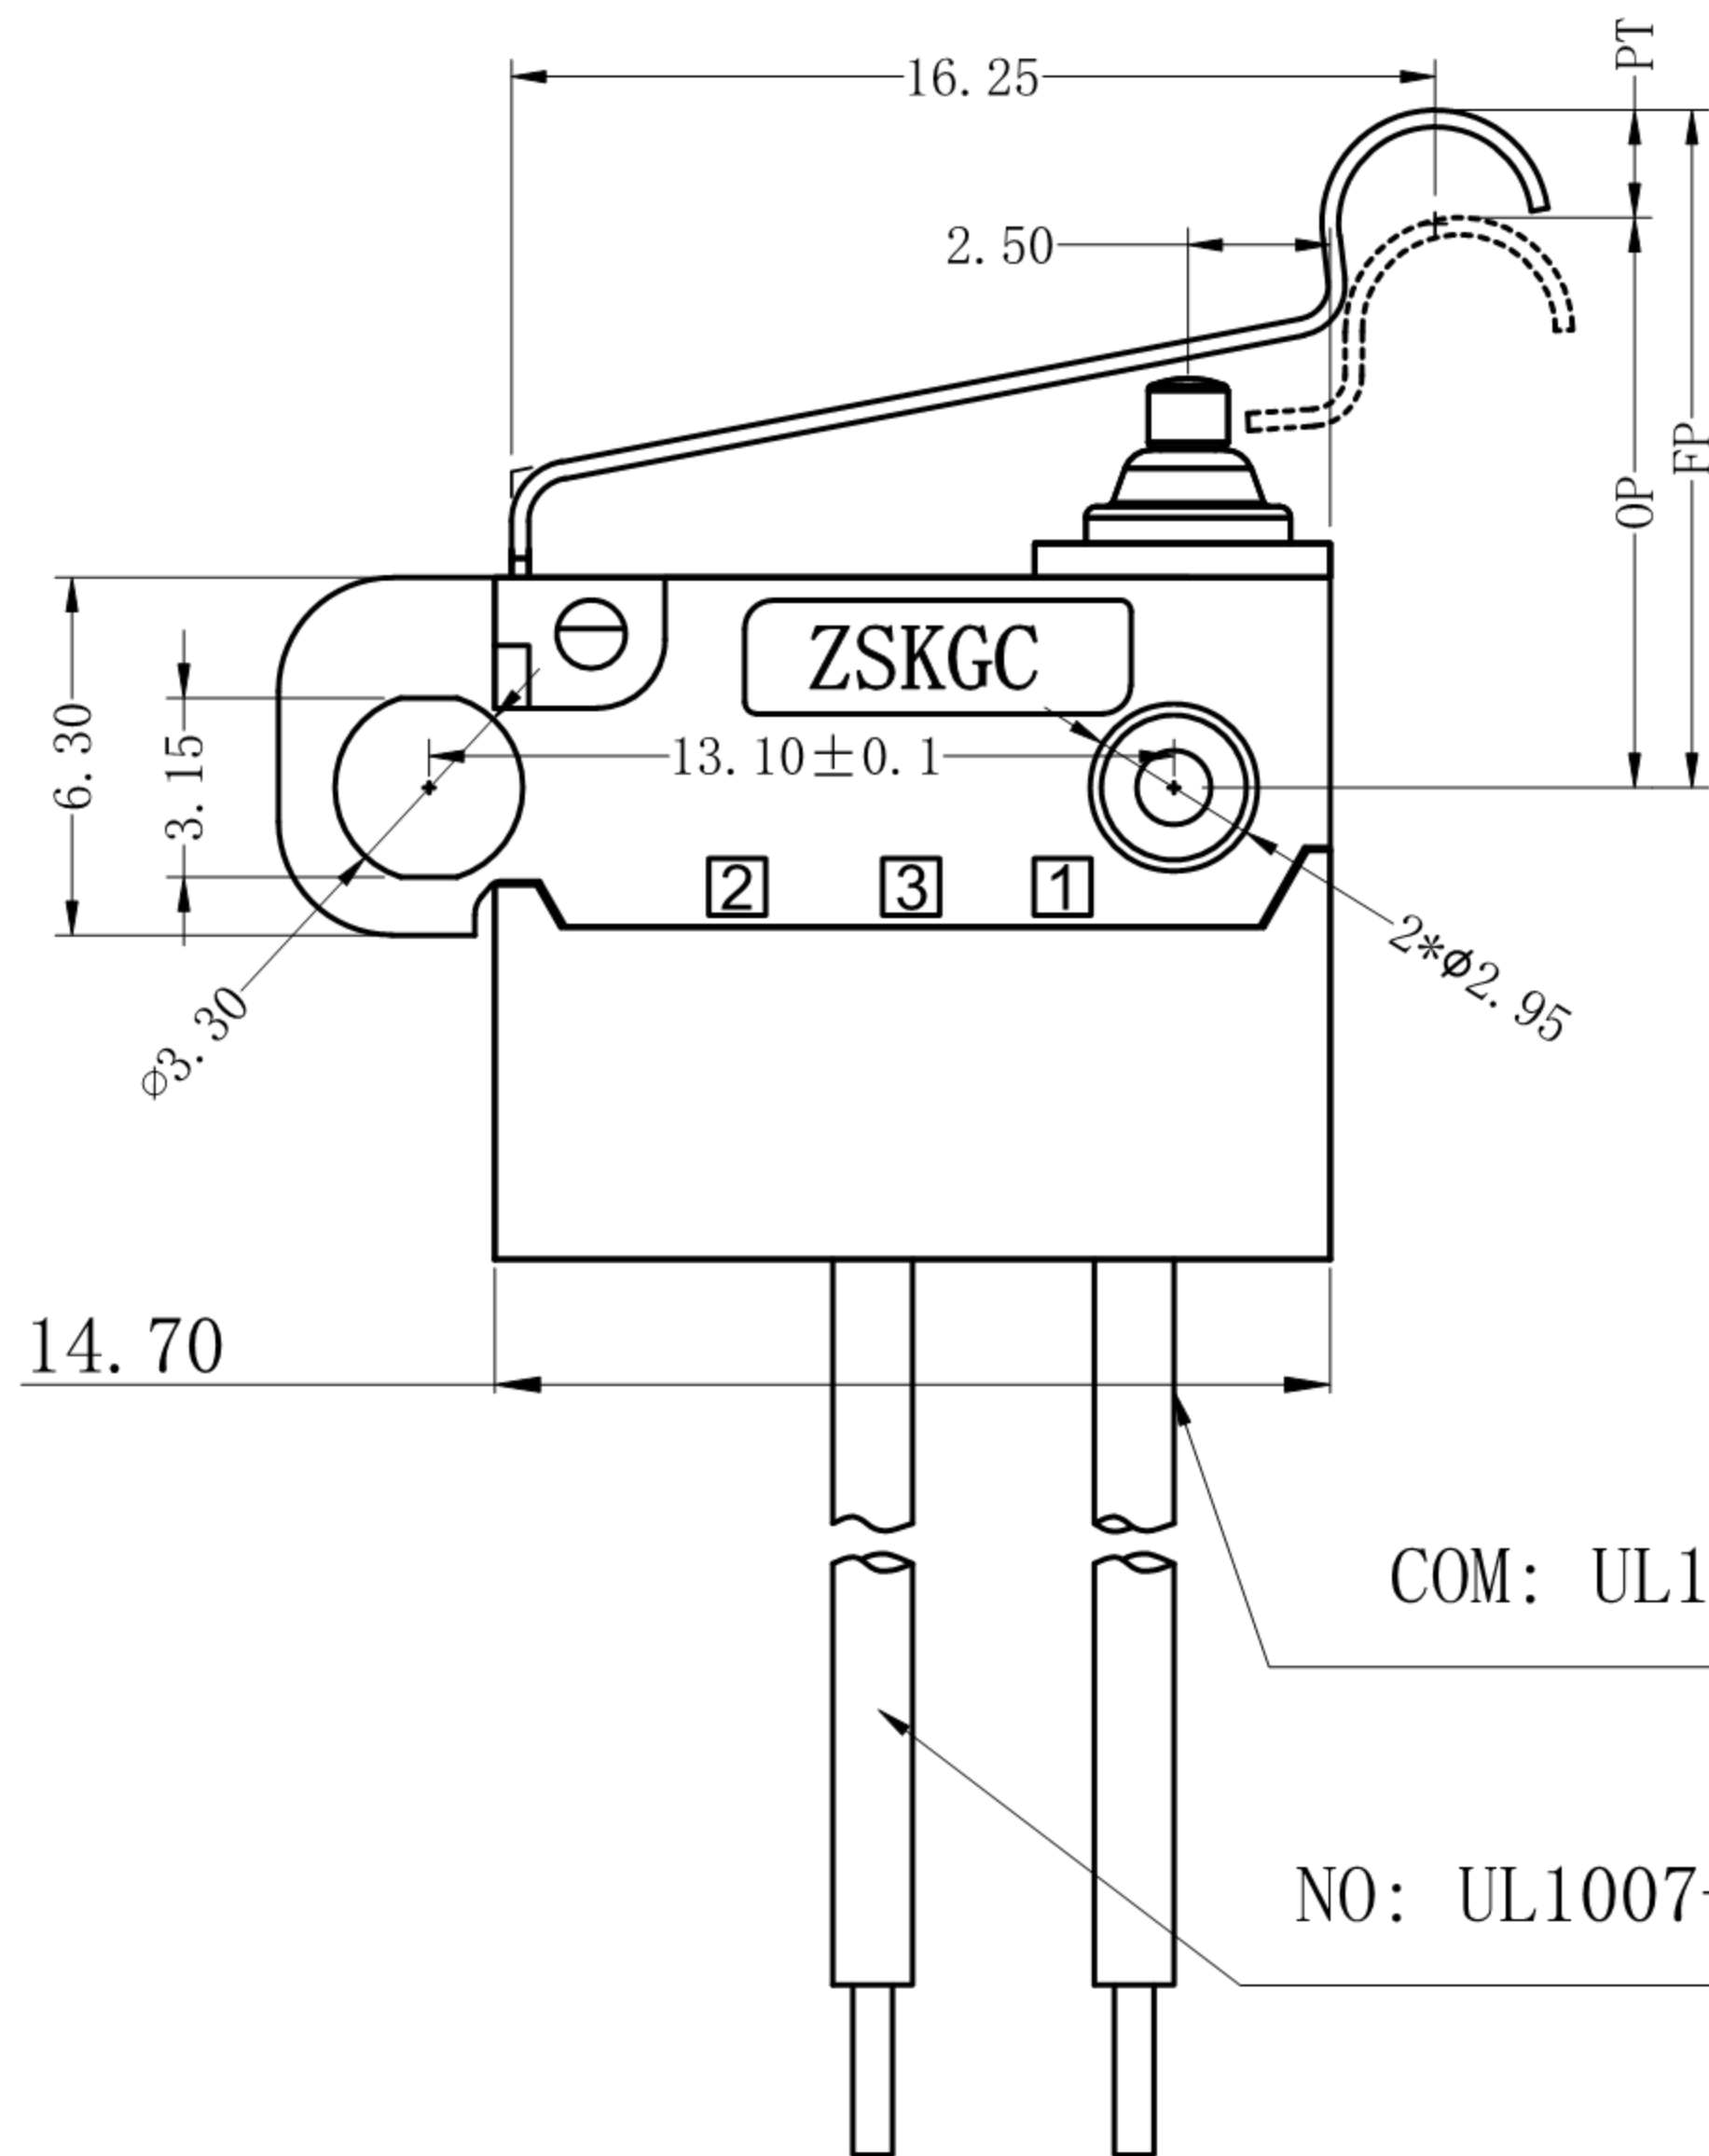


Waterproof grade:IP67

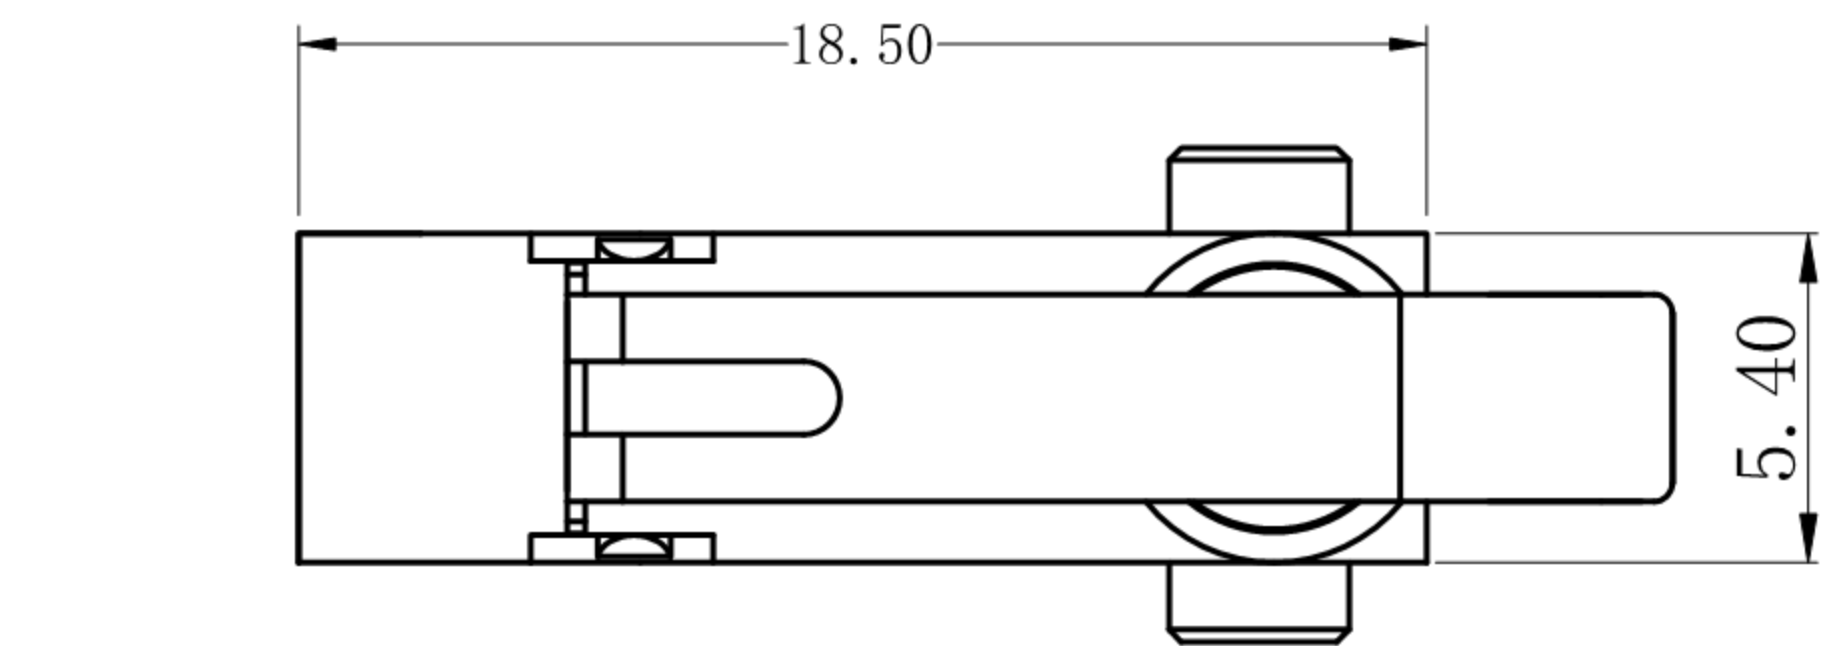


COM: UL1007-22AWG BLACK

NO: UL1007-22AWG BLUE

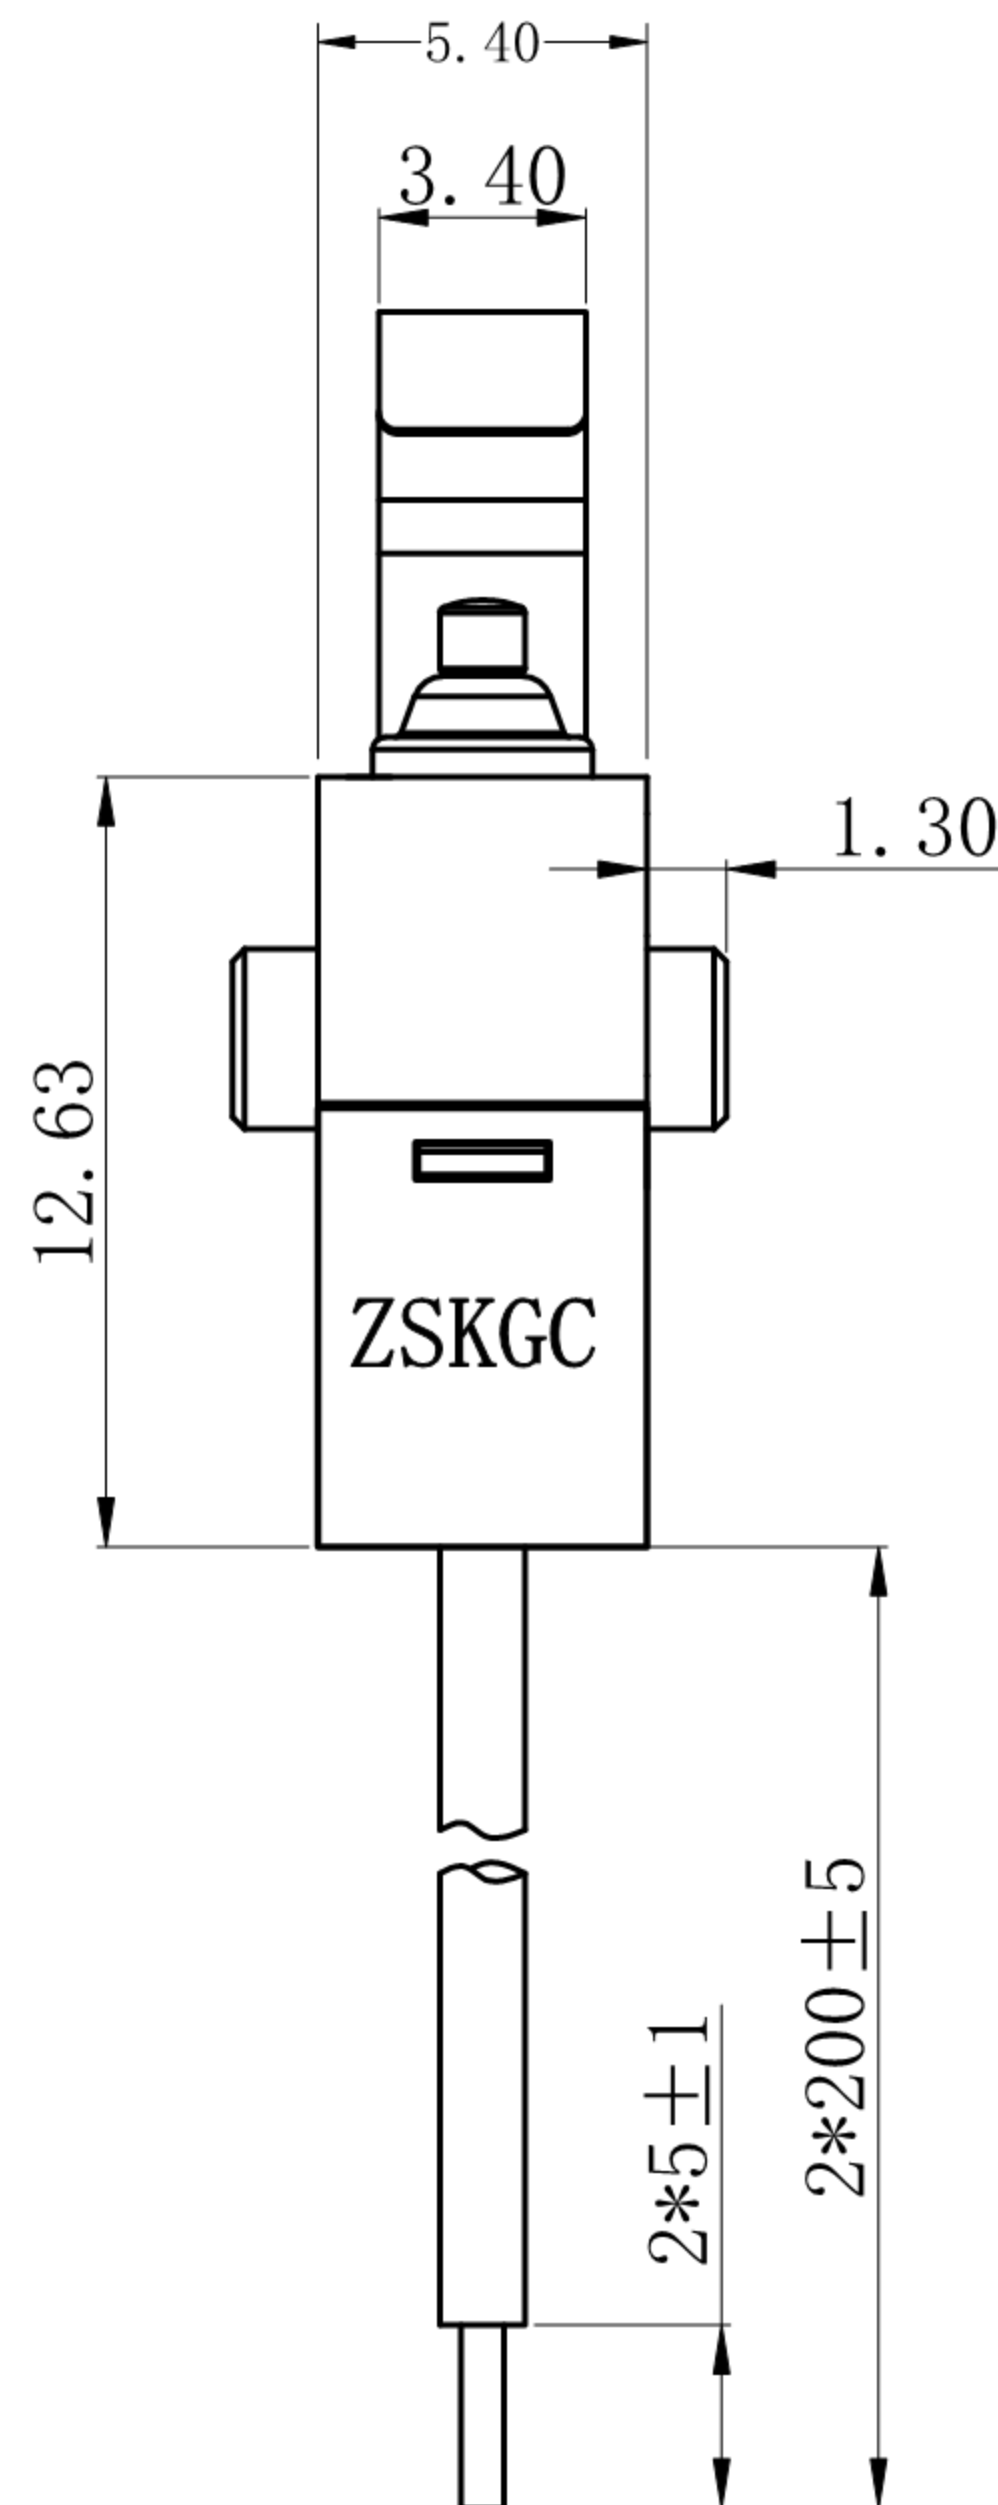

Circuit Diagram

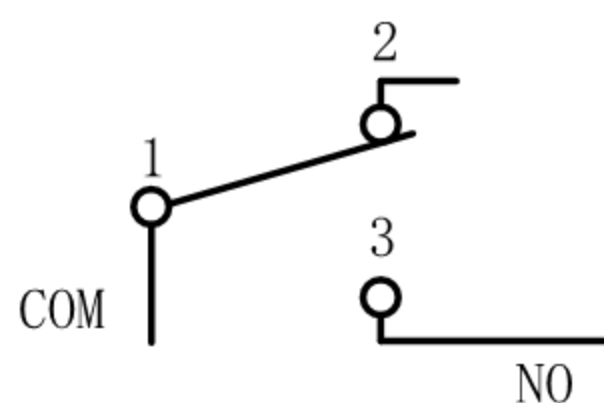

ELECTRICAL DATA

RATING	OPERATING LIFE
3A 12VDC	100,000 CYCLES
0.1A 48VDC 125/250VAC	100,000 CYCLES

MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP	-25℃ ~ +85℃
WATERPROOF	IP67

CHARACTERISITICS	
OPERATING FORCE (OF):	200gf Max.
RELEASE FORCE (RF):	20gf Min.
OPERATING POSITION:	10.7 ± 0.7 mm.
PRE TRAVEL:	3.8mm Max.
DIFFERENTIAL TRAVEL:	0.70mm Max.
FREE POSITION:	13.50mm Max.




東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
Ming Ming Zou 07/23/13

CHECKED BY: DATE
Ning Ning Su 07/23/13

APPROVED BY: DATE
Jia Xiang 07/23/13

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

Waterproof micro movement

Waterproof micro movement

GD-FSK-20D193A

SIZE

A4

VER

R2