

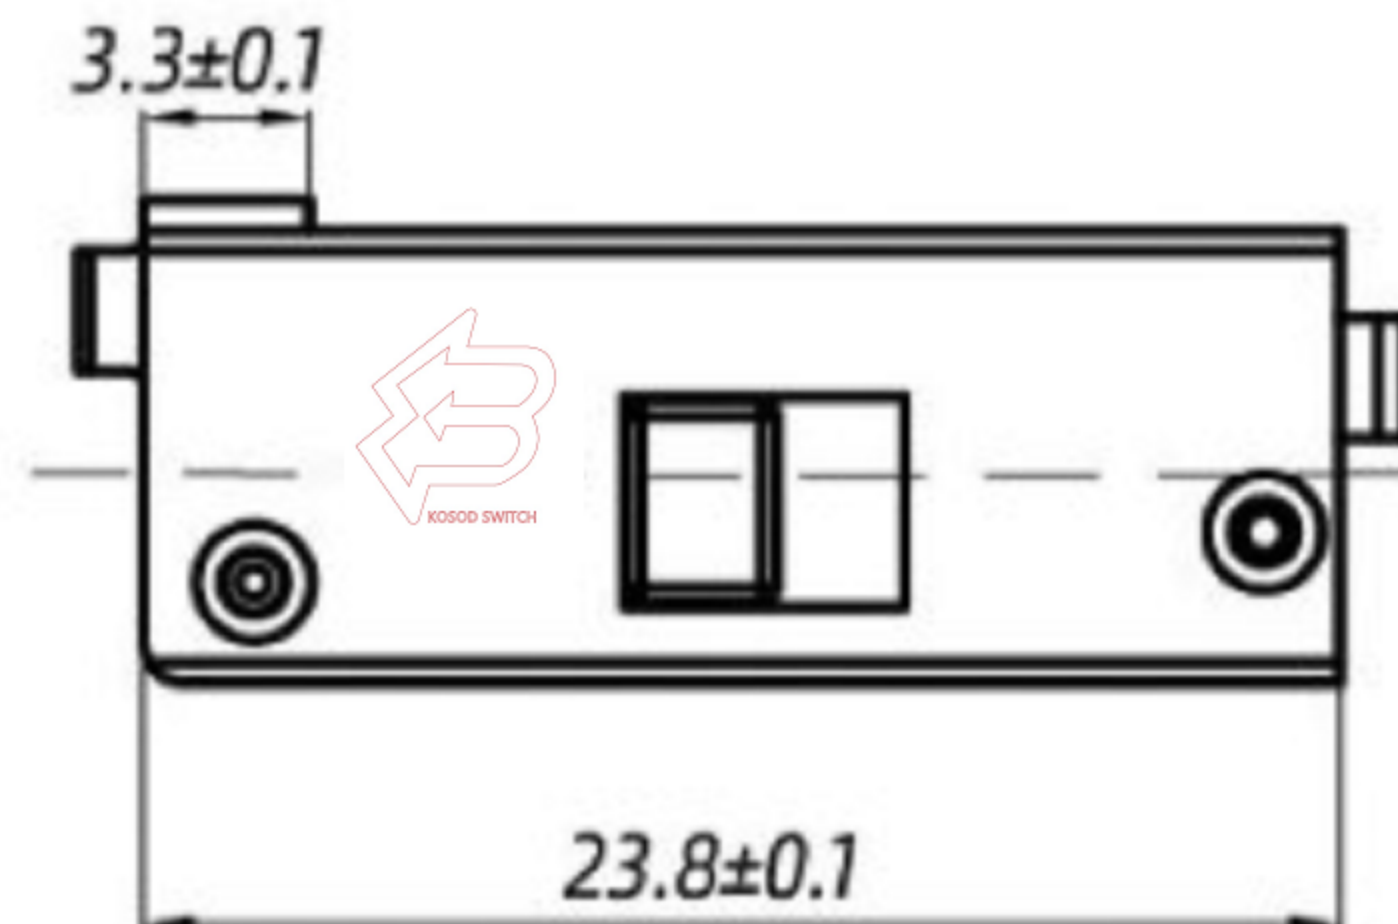


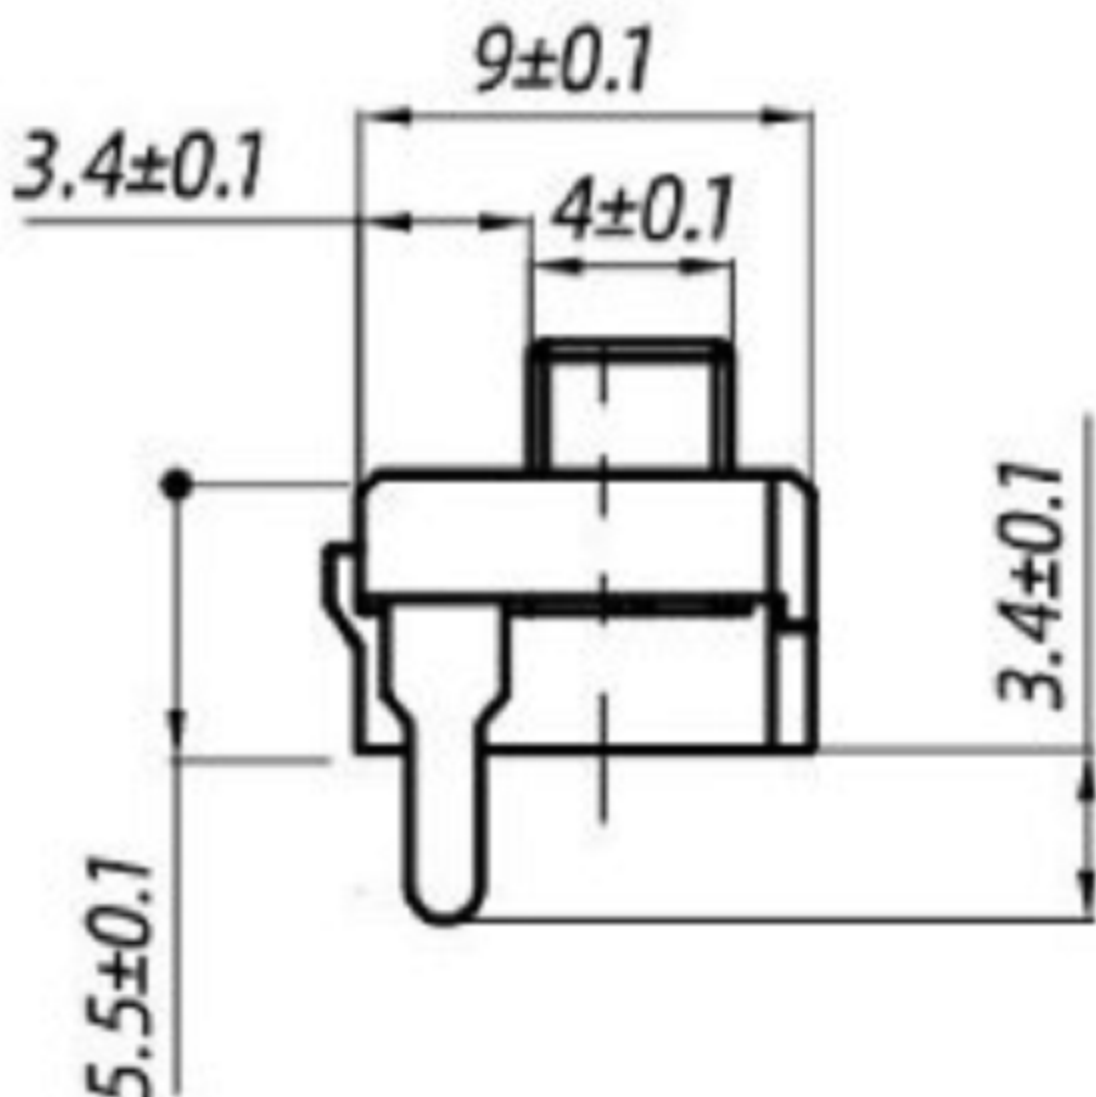

电流电路  
CURRENT CIRCUIT

CIRCUIT:007


| 位置POSITION   | 电路CIRCUIT |
|--------------|-----------|
| 1(INITIAL)起始 | OFF       |
| 2            | C+1       |

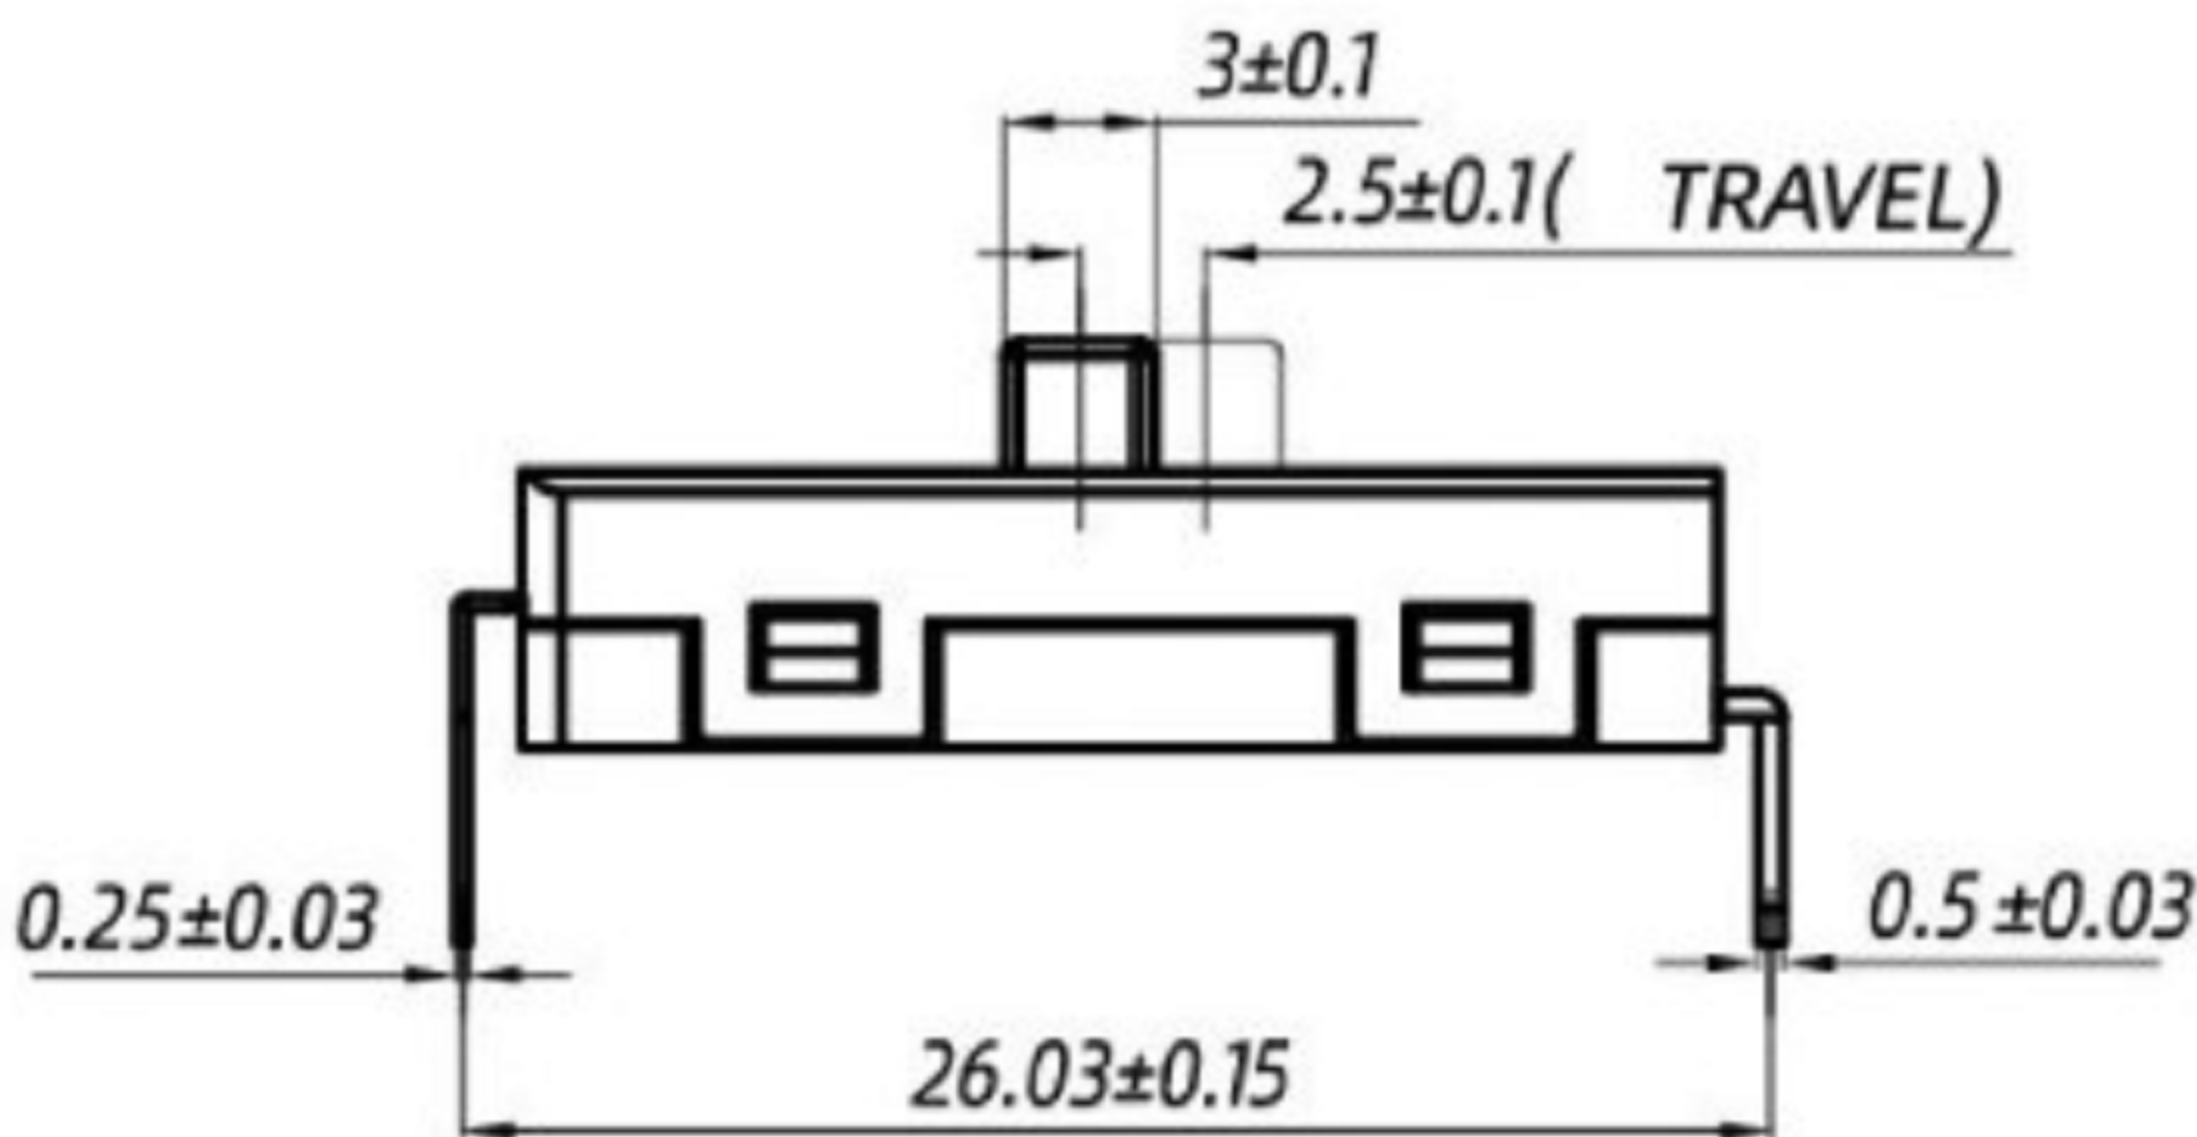

两档滑动开关

- 1.滑动开关型号 SLIDE SWITCH MODEL: KND-1-BP007  
2.PCB端子 PCB MOUNT TERMINAL;  
单刀双掷 . 多回路 SINGLE POLE DOUBLE THROW;  
3.额定值 RATING: 16(4)A 125/250VAC  $\mu$ T105  
10(2)A 125/250VAC  $\mu$ T85  
7(2)A 125/250VAC  $\mu$ T85  
5(1)A 125/250VAC  $\mu$ T85  
4.接触电阻 CONTACT RESISTANCE: <50m $\Omega$  (INITIAL)  
5.绝缘电阻 INSULATION RESISTANCE:  $\geq$ 100M $\Omega$ (DC500V/1MIN)  
6.介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN  
7.机械寿命 MECHANICAL LIFE: >100000 CYCLES  
8.电气寿命 ELECTRICAL LIFE: >50000 CYCLES  
9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C. 3S  
10.操作力 OPERATION FORCE:350 $\pm$ 150gf  
11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

线路图  
CIRCUIT DIAGRAM

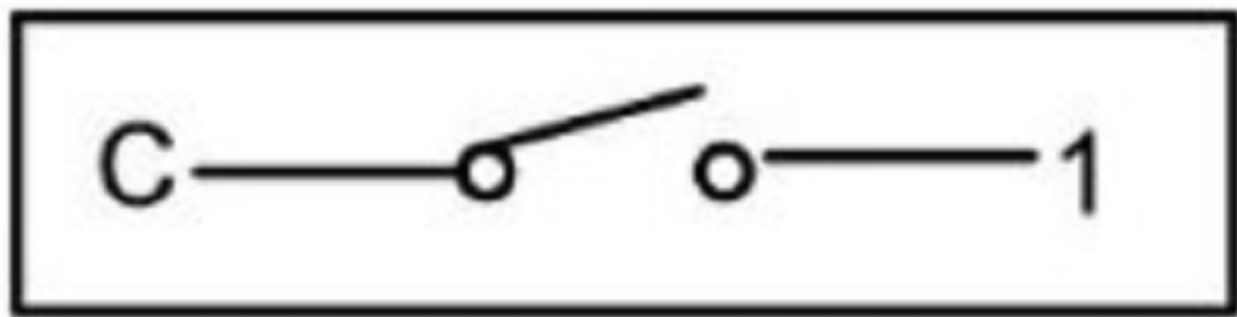

| 5   | CONTACT CLIP | PBS STRIP      | 1   | Ag PLATED |
|-----|--------------|----------------|-----|-----------|
| 4   | TERMINAL     | BRASS          | 3   | Ag PLATED |
| 3   | BASE         | PHENOLIC RESIN | 1   | NATURAL   |
| 2   | FRAME        | STEEL STRIP    | 1   | Ni PLATED |
| 1   | KNOB         | POM            | 1   | BLACK     |
| NO. | PARTS        | MATERIALS      | QTY | FINISH    |

|               |          |           |         |                |
|---------------|----------|-----------|---------|----------------|
| DRAWN BY:     | DATE     | MAT'L     | TITLE   | SWITCH         |
| Ming Ming Zou | 11/19/14 |           |         |                |
| CHECKED BY:   | DATE     | FINISH    | MODLE   | SLIDE SWITCH   |
| Ning Ning Su  | 11/19/14 |           |         |                |
| APPROVED BY:  | DATE     | SCALE     | DWG NO. | GD-KND-1-BP007 |
| Jia Xiang     | 11/19/14 | 1 : 1     |         |                |
|               |          | SHEET NO. | 1 of 1  | PART NO.       |
|               |          |           |         | SIZE           |
|               |          |           |         | A4             |
|               |          |           |         | VER            |
|               |          |           |         | R2             |



东莞市高迪电子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

|                                     |                         |              |       |    |
|-------------------------------------|-------------------------|--------------|-------|----|
| TOLERANCE UNLESS OTHERWISE STATED : | Up to 5 $\pm$ 0.2       | 3RD. ANGEL'S | UNITS | MM |
|                                     | Above 5 ~ 15 $\pm$ 0.3  |              |       |    |
|                                     | Above 15 ~ 30 $\pm$ 0.4 |              |       |    |
|                                     | Above 30 ~ 50 $\pm$ 0.5 |              |       |    |
|                                     | Angle $\pm$ 0.3°        |              |       |    |