


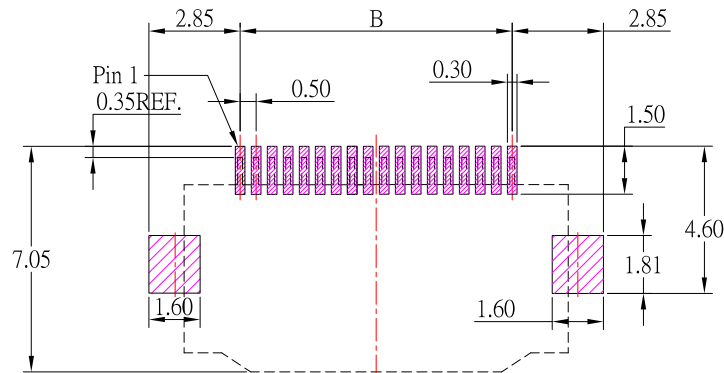
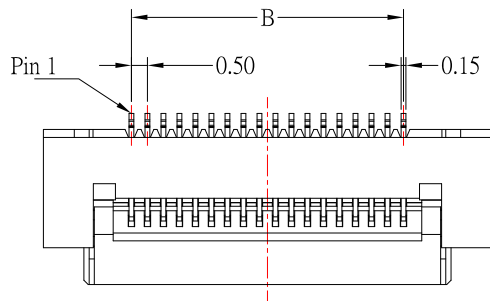
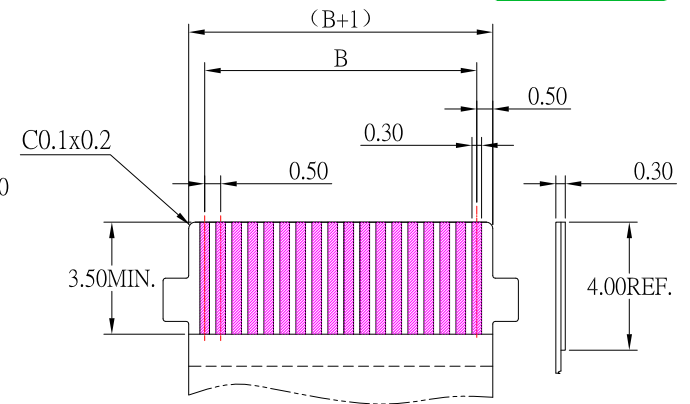




PCB LAYOUT

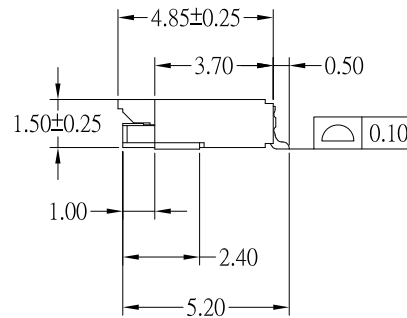

APPLICABLE FPC/FFC

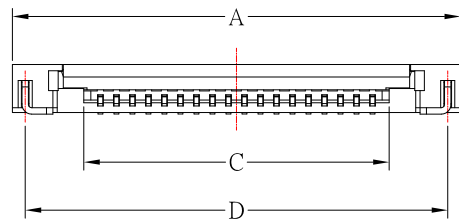

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:NATURE
- 1.2 COVER: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:BLACK
- 1.3 CONTACT: PHOSPHOR BRONZE
- 1.4 LEG: BRASS

2. PLATING:

- 2.1 CONTACT: TIN PLATED ON NICKEL OVERALL
- 2.2 LEG: TIN PLATED ON NICKEL OVERALL

3. RATING:

- 3.1 CURRENT RATING: 0.5A AC/DC
- 3.2 VOLTAGE RATING: 25V AC/DC
- 3.3 TEMPERATURE RANGE: -25°C~+85°C

Number of Contacts	Dimension			
	A	B	C	D
18	14.00	8.50	9.54	13.20
24	17.00	11.50	11.04	16.20



TOLERANCE UNLESS OTHERWISE STATED

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/23/17			
CHECKED BY:	DATE	FINISH	MODLE	FPC 0.5mm 掀蓋式 蝴蝶扣
Jacky Chen	10/23/17			
APPROVED BY:	DATE	SCALE	DWG NO.	FPC05L-15xx-B1-S304
Tony Kao	10/23/17	1 : 1		
		SHEET NO.	PART NO.	FPC05L-15xx-B1-S304